





スーパーラフィングジブ作業概念図

40mブーム+2m+35mSLジブ(15°)
1.5t×70m
105tカウンターウエイト

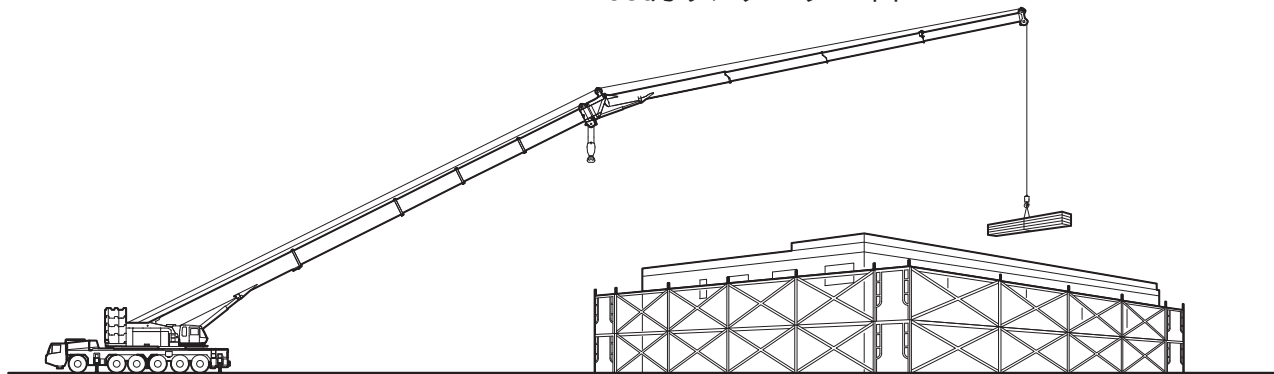


55mブーム+2m+35mSLジブ(60°)
1.3t×56m
105tカウンターウエイト

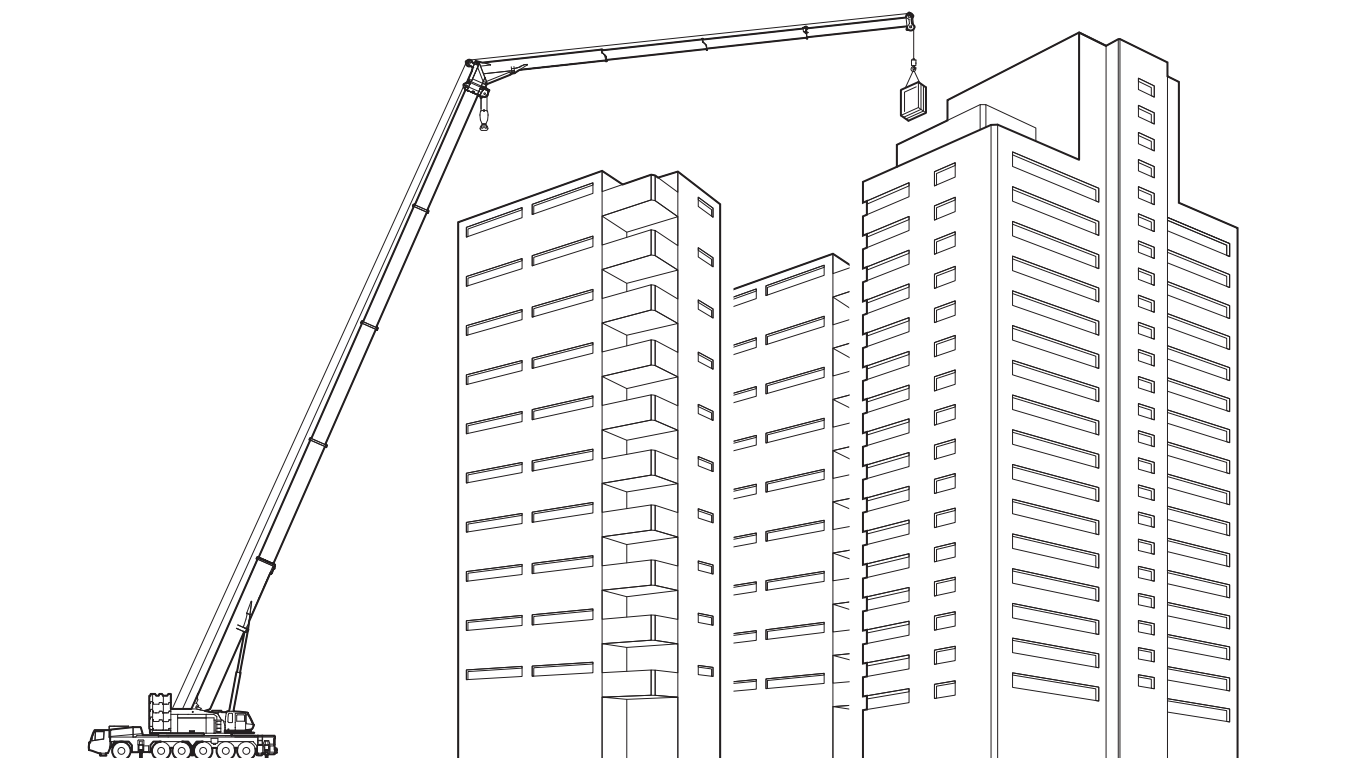



スーパーラフィングジブ作業概念図


55mブーム+2m+35mSLジブ(0°)
6.5t×10m
0tカウンターウエイト

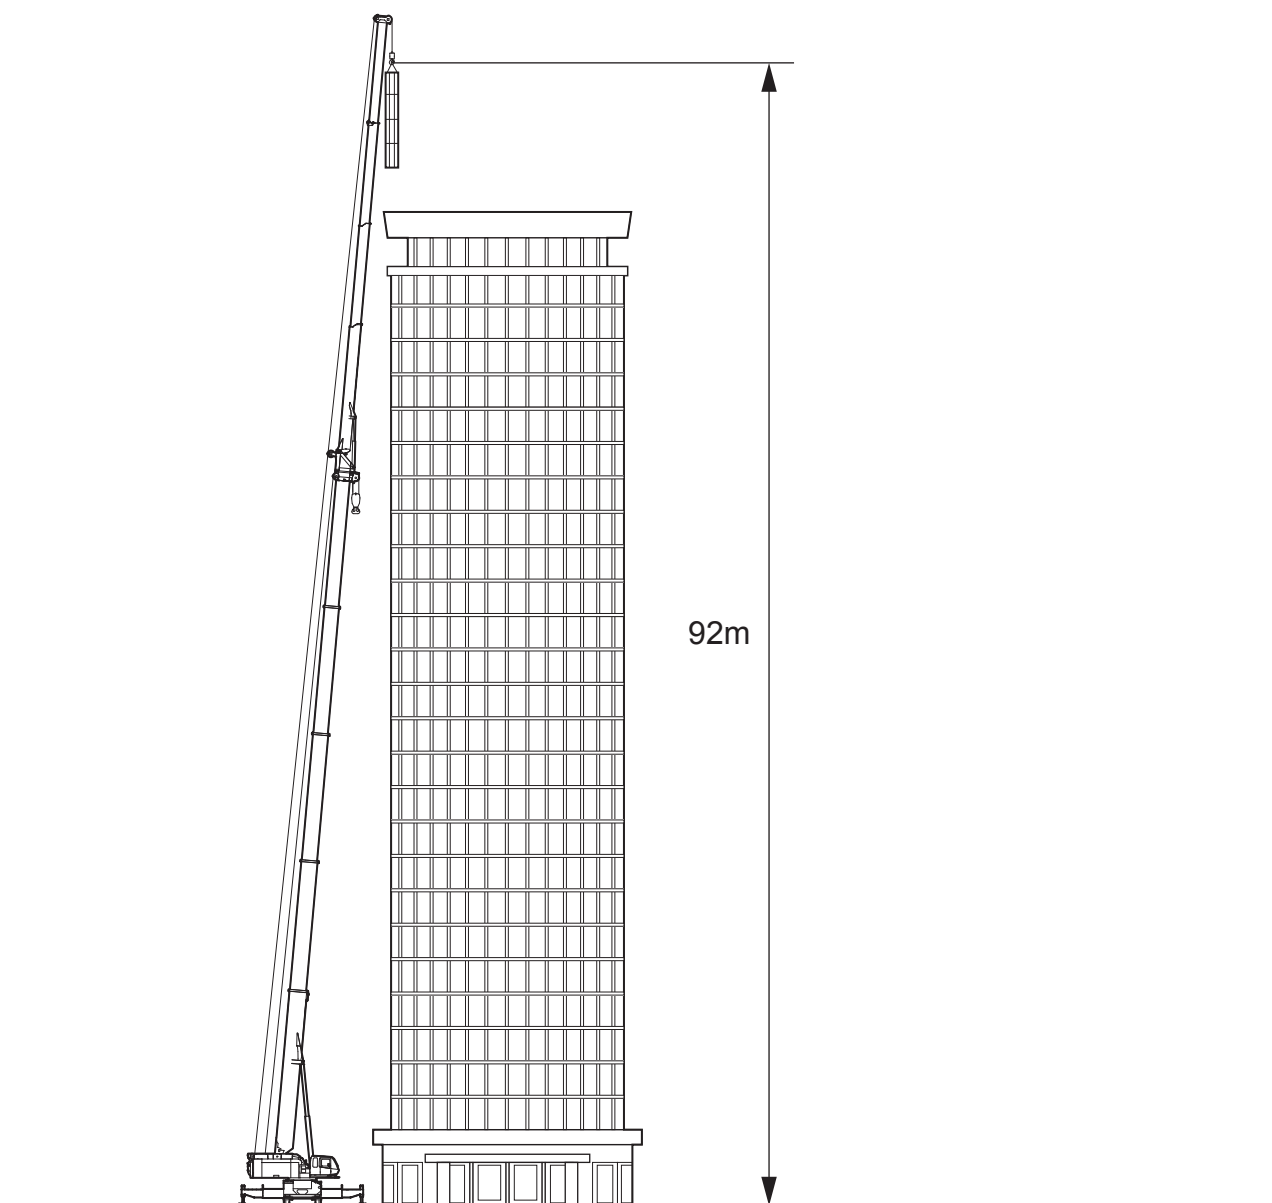



スーパーラフィングジブ 作業範囲図【40mブーム時】

- ① 40m ブーム + 2m + 10.85m SLジブ (オフセット 5°)
- ② 40m ブーム + 2m + 15m SLジブ (オフセット 0°)
- ③ 40m ブーム + 2m + 20m SLジブ (オフセット 0°)
- ④ 40m ブーム + 2m + 25m SLジブ (オフセット 0°)
- ⑤ 40m ブーム + 2m + 30m SLジブ (オフセット 0°)
- ⑥ 40m ブーム + 2m + 35m SLジブ (オフセット 0°)
- ⑦ 40m ブーム + 2m + 10.85m SLジブ (オフセット 60°)
- ⑧ 40m ブーム + 2m + 15m SLジブ (オフセット 60°)
- ⑨ 40m ブーム + 2m + 20m SLジブ (オフセット 60°)
- ⑩ 40m ブーム + 2m + 25m SLジブ (オフセット 60°)
- ⑪ 40m ブーム + 2m + 30m SLジブ (オフセット 60°)
- ⑫ 40m ブーム + 2m + 35m SLジブ (オフセット 60°)

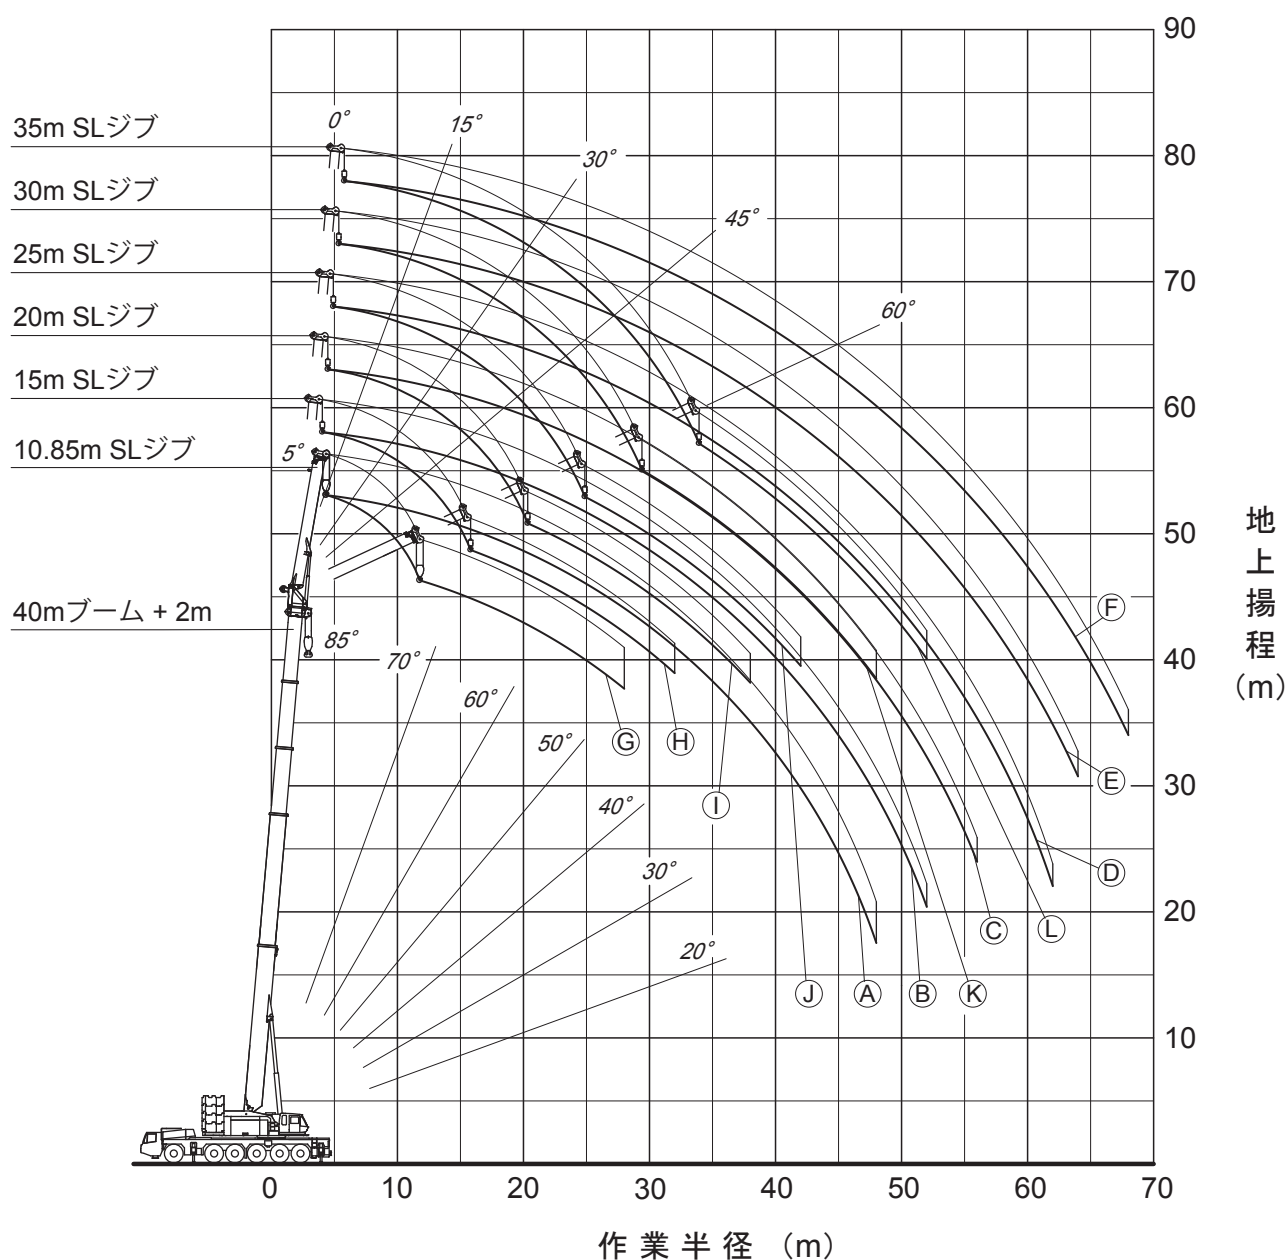

注1. 本図は、ブームおよびSLジブのたわみを含んでいません。
2. SA性能時のものを示してします。



10.85m — 35m

スーパーラフィングジブ【40mブーム時】

SA性能 40mブーム + 2m + 10.85mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
6.0	84.1	24.0			
7.0	83.2	24.0			
8.0	82.2	24.0	84.2	24.0	
9.0	81.2	24.0	83.1	24.0	
10.0	80.2	24.0	82.1	24.0	
11.0	79.2	24.0	81.1	24.0	
12.0	78.2	24.0	80.1	24.0	
14.0	76.2	24.0	78.0	24.0	
16.0	74.1	24.0	75.9	24.0	
18.0	72.0	24.0	73.8	24.0	
20.0	69.8	24.0	71.6	24.0	
22.0	67.6	24.0	69.3	24.0	
24.0	65.2	23.3	66.8	21.7	68.8
26.0	62.6	20.8	64.4	20.0	66.2
28.0	60.0	18.0	61.8	18.3	63.5
30.0	57.4	16.4	59.2	16.4	60.7
32.0	54.5	14.8	56.3	14.9	57.8
34.0	51.5	12.9	53.3	13.4	54.7
36.0	48.3	10.9	50.1	11.5	51.4
38.0	45.0	9.2	46.8	9.7	48.0
40.0	41.5	7.7	43.1	8.0	44.2
42.0	37.7	6.3	39.1	6.6	40.0
44.0	33.5	5.0	34.7	5.2	35.3
46.0	28.7	3.8	29.7	4.0	5.4
48.0	22.8	2.8	23.4	2.9	
危険角度 (°)	18	18	32	47	62.5
標準フック	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
巻掛本数	2	2	2	2	2

SA性能 40mブーム + 2m + 15mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
5.0	84.3	12.0			
6.0	83.4	12.0			
7.0	82.5	12.0			
8.0	81.6	12.0			
9.0	80.6	12.0	84.6	12.0	
10.0	79.7	12.0	83.6	12.0	
11.0	78.7	12.0	82.6	12.0	
12.0	77.8	12.0	81.5	12.0	
14.0	75.9	12.0	79.5	12.0	
16.0	74.0	12.0	77.5	12.0	
18.0	72.0	12.0	75.4	12.0	
20.0	69.9	12.0	73.4	12.0	
22.0	67.9	12.0	71.3	12.0	
24.0	65.7	12.0	69.3	12.0	
26.0	63.6	12.0	67.1	12.0	
28.0	61.4	12.0	65.0	12.0	
30.0	59.1	12.0	62.7	12.0	
32.0	56.8	12.0	60.3	12.0	
34.0	54.4	12.0	57.8	12.0	
36.0	51.9	12.0	55.2	12.0	
38.0	49.0	10.6	52.3	11.6	54.8
40.0	46.1	9.0	49.3	10.0	51.8
42.0	43.0	7.6	46.2	8.5	48.5
44.0	39.7	6.4	42.7	7.1	44.8
46.0	36.1	5.2	39.1	5.8	40.7
48.0	32.3	4.2	35.0	4.7	36.0
50.0	27.9	3.2	30.3	3.6	
52.0	22.6	2.3	24.6	2.6	
危険角度 (°)	18	18	32	47	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SA性能 40mブーム + 2m + 20mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
6.0	84.2	12.0			
7.0	83.3	12.0			
8.0	82.5	12.0			
9.0	81.6	12.0			
10.0	80.8	12.0			
11.0	80.0	12.0	84.5	12.0	
12.0	79.1	12.0	83.7	12.0	
14.0	77.4	12.0	81.9	12.0	
16.0	75.7	12.0	80.2	12.0	
18.0	73.9	12.0	78.4	12.0	
20.0	72.1	12.0	76.5	12.0	
22.0	70.3	12.0	74.7	12.0	
24.0	68.4	12.0	72.8	12.0	
26.0	66.5	12.0	70.8	12.0	
28.0	64.6	12.0	68.8	12.0	
30.0	62.6	12.0	66.8	11.4	70.6
32.0	60.5	11.4	64.6	10.9	68.4
34.0	58.3	10.7	62.4	10.4	66.1
36.0	56.1	10.2	60.2	10.0	63.7
38.0	53.8	9.6	57.9	9.6	61.2
40.0	51.4	9.1	55.5	9.2	58.6
42.0	48.8	8.3	52.8	8.8	55.8
44.0	46.0	7.7	50.1	8.3	52.9
46.0	43.0	6.6	47.2	7.6	49.8
48.0	39.9	5.5	44.1	6.4	46.4
50.0	36.8	4.6	40.7	5.3	42.7
52.0	33.5	3.7	36.9	4.3	38.5
54.0	29.4	2.9	32.7	3.4	33.6
56.0	24.8	2.1	27.4	2.5	
58.0		20.6	1.6		
危険角度 (°)	19	19	32	47	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SA性能 40mブーム + 2m + 25mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
6.0	84.6	12.0			
7.0	83.8	12.0			
8.0	83.1	12.0			
9.0	82.3	12.0			
10.0	81.6	12.0			
11.0	80.8	12.0			
12.0	80.1	12.0			
14.0	78.5	12.0	84.0	12.0	
16.0	76.9	12.0	82.4	12.0	
18.0	75.3	12.0	80.7	12.0	
20.0	73.7	12.0	79.0	12.0	
22.0	72.0	12.0	77.3	11.8	82.2
24.0	70.3	12.0	75.5	11.1	80.4
26.0	68.7	12.0	73.8	10.4	78.5
28.0	66.9	11.1	72.0	9.8	76.5
30.0	65.0	10.3	70.1	9.3	74.6
32.0	63.2	9.6	68.3	8.8	72.5
34.0	61.3	8.9	66.4	8.3	70.5
36.0	59.3	8.3	64.4	7.9	68.4
38.0	57.4	7.8	62.3	7.6	66.2
40.0	55.2	7.3	60.2	7.2	63.9
42.0	53.0	6.9	58.0	6.9	61.6
44.0	50.7	6.5	55.7	6.6	59.2
46.0	48.3	6.2	53.3	6.4	56.7
48.0	45.9	5.7	50.7	6.1	54.0
50.0	43.2	5.4	48.0	5.9	51.2
52.0	40.5	4.8	45.1	5.7	48.2
54.0	37.5	4.0	41.9	4.8	44.5
56.0	34.3	3.2	38.6	4.0	40.5
58.0	30.6	2.5	34.6	3.1	35.9
60.0	26.4	1.9	30.1	2.4	
62.0	21.4	1.3	24.5	1.6	
危険角度 (°)	19	19	32	47	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SA性能 40mブーム + 2m + 30mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
7.0	84.5	10.0			
8.0	83.8	10.0			
9.0	83.2	10.0			
10.0	82.5	10.0			
11.0	81.8	10.0			
12.0	81.1	10.0			
14.0	79.7	10.0			
16.0	78.3	10.0	84.3	10.0	
18.0	76.8	10.0	82.8	10.0	
20.0	75.2	10.0	81.3	10.0	
22.0	73.7	10.0	79.8	10.0	
24.0	72.1	10.0	78.2	9.6	
26.0	70.6	10.0	76.6	9.0	
28.0	69.0	9.7	74.9	8.5	
30.0	67.3	9.0	73.3	8.0	
32.0	65.7	8.3	71.6	7.5	
34.0	64.0	7.7	69.9	7.1	
36.0	62.3	7.1	68.1	6.8	
38.0	60.5	6.6	66.4	6.4	
40.0	58.7	6.3	64.4	6.1	
42.0	56.9	5.9	62.4	5.9	
44.0	54.9	5.6	60.3	5.6	
46.0	52.8	5.3	58.2	5.4	
48.0	50.6	5.1	56.0	5.2	
50.0	48.3	4.8	53.7	5.0	
52.0	46.0	4.5	51.3	4.8	
54.0	43.5	4.2	48.8	4.5	
56.0	40.9	3.9	46.1	4.3	
58.0	38.2	3.5	43.3	4.1	
60.0	35.2	2.8	40.0	3.6	
62.0	31.9	2.2	36.4	2.9	
64.0	28.3	1.7	32.3	2.2	
66.0			27.5	1.6	
危険角度 (°)	24	24	32	47.5	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SA性能 40mブーム + 2m + 35mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
8.0	84.3	8.0			
9.0	83.7	8.0			
10.0	83.1	8.0			
11.0	82.4	8.0			
12.0	81.8	8.0			
14.0	80.5	8.0			
16.0	79.2	8.0			
18.0	77.8	7.9	84.0	5.1	
20.0	76.3	7.2	82.6	4.8	
22.0	74.9	6.6	81.2	4.5	
24.0	73.4	6.0	79.7	4.3	
26.0	71.9	5.6	78.2	4.0	
28.0	70.4	5.2	76.7	3.8	
30.0	68.9	4.8	75.2	3.6	
32.0	67.3	4.5	73.5	3.4	
34.0	65.7	4.3	71.8	3.2	
36.0	64.1	4.0	70.1	3.0	
38.0	62.4	3.8	68.3	2.9	
40.0	60.7	3.6	66.5	2.7	
42.0	59.0	3.4	64.7	2.6	
44.0	57.3	3.2	62.9	2.4	
46.0	55.4	3.0	61.1	2.3	
48.0	53.6	2.8	59.3	2.2	
50.0	51.7	2.6	57.4	2.1	
52.0	49.7	2.5	55.4	2.0	
54.0	47.7	2.4	53.4	1.9	
56.0	45.5	2.2	51.2	1.8	
58.0	43.3	2.1	49.0	1.7	
60.0	41.0	2.0	46.4	1.7	
62.0	38.4	1.9	43.7	1.6	
64.0	35.8	1.8	40.8	1.6	
66.0	32.8	1.7	37.6	1.5	
68.0	29.6	1.4	34.0	1.5	
70.0			29.9	1.5	
危険角度 (°)	26	26	32	47.5	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1



10.85m — 35m

スーパーラフィングジブ【40mブーム時】

SB性能 40mブーム + 2m + 10.85mSLジブ

オフセット	5°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.1	24.0								
7.0	83.2	24.0								
8.0	82.2	24.0	84.2	24.0						
9.0	81.2	24.0	83.1	24.0						
10.0	80.2	24.0	82.1	24.0	84.9	24.0				
11.0	79.2	24.0	81.1	24.0	83.8	24.0				
12.0	78.2	24.0	80.1	24.0	82.8	24.0	84.7	22.6		
14.0	76.2	24.0	78.0	24.0	80.6	24.0	82.6	22.6	83.7	20.7
16.0	74.1	24.0	75.9	24.0	78.4	24.0	80.2	21.9	81.3	20.4
18.0	72.0	24.0	73.8	24.0	76.1	23.3	77.7	21.4	78.8	20.2
20.0	69.8	24.0	71.6	24.0	73.7	22.3	75.2	20.2	76.2	19.3
22.0	67.6	24.0	69.3	23.4	71.3	20.7	72.6	19.1	73.6	18.5
24.0	65.2	23.3	66.8	21.7	68.8	19.4	70.0	18.2	70.7	17.7
26.0	62.6	20.8	64.4	20.0	66.2	18.3	67.4	17.3	67.8	17.0
28.0	60.0	18.0	61.8	18.3	63.5	17.4	64.7	16.5	64.7	16.4
30.0	57.3	15.5	59.1	16.3	60.7	16.5	61.9	15.8		
32.0	54.3	13.2	56.2	13.8	57.7	14.6	58.9	15.0		
34.0	51.3	11.1	53.1	11.7	54.6	12.4	55.5	12.7		
36.0	48.2	9.2	50.0	9.8	51.3	10.3	51.8	10.6		
38.0	44.9	7.6	46.6	8.1	47.8	8.5	48.0	8.7		
40.0	41.4	6.1	43.0	6.5	44.1	6.9				
42.0	37.6	4.8	39.0	5.1	39.9	5.4				
44.0	33.4	3.6	34.6	3.9	35.1	4.0				
46.0			29.5	2.7						
危険角度 (°)	29		29		32		47		62.5	
標準フック	24t		24t		24t		24t		24t	
フック質量 (t)	0.88		0.88		0.88		0.88		0.88	
巻掛本数	2		2		2		2		2	

SB性能 40mブーム + 2m + 15mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
5.0	84.3	12.0								
6.0	83.4	12.0								
7.0	82.5	12.0								
8.0	81.6	12.0								
9.0	80.6	12.0	84.6	12.0						
10.0	79.7	12.0	83.6	12.0						
11.0	78.7	12.0	82.6	12.0						
12.0	77.8	12.0	81.5	12.0						
14.0	75.9	12.0	79.5	12.0	83.0	12.0				
16.0	74.0	12.0	77.5	12.0	81.0	12.0	83.7	12.0		
18.0	72.0	12.0	75.4	12.0	78.9	12.0	81.6	12.0	83.4	12.0
20.0	69.9	12.0	73.4	12.0	76.8	12.0	79.4	12.0	81.1	12.0
22.0	67.9	12.0	71.3	12.0	74.6	12.0	77.1	12.0	78.6	12.0
24.0	65.7	12.0	69.3	12.0	72.4	12.0	74.8	12.0	76.2	12.0
26.0	63.6	12.0	67.1	12.0	70.1	12.0	72.4	12.0	73.5	12.0
28.0	61.4	12.0	65.0	12.0	67.7	12.0	69.9	12.0	70.7	12.0
30.0	59.1	12.0	62.7	12.0	65.3	12.0	67.4	12.0	67.8	12.0
32.0	56.8	12.0	60.3	12.0	62.9	12.0	64.7	12.0	64.8	12.0
34.0	54.4	12.0	57.8	12.0	60.4	12.0	61.9	11.9		
36.0	51.8	10.6	55.2	11.8	57.7	12.0	58.9	11.4		
38.0	48.9	8.9	52.2	10.0	54.8	10.9	55.8	11.0		
40.0	46.0	7.5	49.2	8.5	51.7	9.2	52.4	9.5		
42.0	42.9	6.2	46.0	7.0	48.4	7.6	48.7	7.8		
44.0	39.6	5.0	42.6	5.7	44.6	6.2				
46.0	36.0	3.9	38.9	4.5	40.5	4.9				
48.0	32.2	2.9	34.8	3.4	35.9	3.7				
50.0			30.2	2.4						
危険角度 (°)	29		29		32		47		62.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SB性能 40mブーム + 2m + 20mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.2	12.0								
7.0	83.3	12.0								
8.0	82.5	12.0								
9.0	81.6	12.0								
10.0	80.8	12.0								
11.0	80.0	12.0	84.5	12.0						
12.0	79.1	12.0	83.7	12.0						
14.0	77.4	12.0	81.9	12.0						
16.0	75.7	12.0	80.2	12.0	84.4	12.0				
18.0	73.9	12.0	78.4	12.0	82.6	12.0				
20.0	72.1	12.0	76.5	12.0	80.7	12.0	84.1	11.6		
22.0	70.3	12.0	74.7	12.0	78.8	12.0	82.0	11.2	84.3	10.2
24.0	68.4	12.0	72.8	12.0	76.9	12.0	79.8	10.9	81.9	10.0
26.0	66.5	12.0	70.8	12.0	74.9	11.6	77.6	10.6	79.5	9.8
28.0	64.6	12.0	68.8	12.0	72.7	11.1	75.4	10.3	77.0	9.7
30.0	62.6	12.0	66.8	11.4	70.6	10.7	73.1	10.1	74.5	9.6
32.0	60.5	11.4	64.6	10.9	68.4	10.3	70.7	9.9	71.9	9.6
34.0	58.3	10.7	62.4	10.4	66.1	10.0	68.3	9.7	69.2	9.5
36.0	56.1	10.2	60.2	10.0	63.7	9.6	65.7	9.4	66.5	9.1
38.0	53.8	9.6	57.9	9.6	61.2	9.3	63.1	9.0	63.6	8.8
40.0	51.4	8.9	55.5	9.2	58.6	9.1	60.3	8.7		
42.0	48.7	7.5	52.8	8.8	55.8	8.7	57.2	8.3		
44.0	45.8	6.3	50.0	7.5	52.9	8.3	54.0	8.0		
46.0	42.9	5.3	47.1	6.2	49.7	7.0	50.5	7.3		
48.0	39.8	4.3	44.0	5.1	46.3	5.8				
50.0	36.7	3.3	40.6	4.1	42.5	4.6				
52.0	33.2	2.5	36.8	3.1	38.3	3.6				
54.0			32.6	2.3	33.3	2.5				
危険角度 (°)	30		30		32		47		63	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SB性能 40mブーム + 2m + 25mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.6	12.0								
7.0	83.8	12.0								
8.0	83.1	12.0								
9.0	82.3	12.0								
10.0	81.6	12.0								
11.0	80.8	12.0								
12.0	80.1	12.0								
14.0	78.5	12.0	84.0	12.0						
16.0	76.9	12.0	82.4	12.0						
18.0	75.3	12.0	80.7	12.0						
20.0	73.7	12.0	79.0	12.0	84.1	10.7				
22.0	72.0	12.0	77.3	11.8	82.2	10.2				
24.0	70.3	12.0	75.5	11.1	80.4	9.7	84.5	8.7		
26.0	68.7	12.0	73.8	10.4	78.5	9.3	82.5	8.4		
28.0	66.9	11.1	72.0	9.8	76.5	8.9	80.5	8.2	83.0	7.3
30.0	65.0	10.3	70.1	9.3	74.6	8.5	78.4	7.9	80.6	7.2
32.0	63.2	9.6	68.3	8.8	72.5	8.2	76.3	7.7	78.3	7.1
34.0	61.3	8.9	66.4	8.3	70.5	7.9	74.1	7.5	75.8	7.1
36.0	59.3	8.3	64.4	7.9	68.4	7.6	71.8	7.3	73.3	7.0
38.0	57.4	7.8	62.3	7.6	66.2	7.4	69.5	7.2	70.6	7.0
40.0	55.2	7.3	60.2	7.2	63.9	7.1	67.0	7.1	67.9	7.0
42.0	53.0	6.9	58.0	6.9	61.6	6.9	64.5	6.9	64.9	6.9
44.0	50.7	6.5	55.7	6.6	59.2	6.7	61.8	6.8		
46.0	48.3	6.2	53.3	6.4	56.7	6.6	58.8	6.6		
48.0	45.8	5.4	50.7	6.1	54.0	6.4	55.6	6.3		
50.0	43.1	4.5	47.9	5.6	51.2	6.2	52.1	6.1		
52.0	40.3	3.6	44.9	4.6	48.1	5.4	48.4	5.7		
54.0	37.3	2.9	41.8	3.7	44.4	4.3				
56.0	34.1	2.1	38.4	2.9	40.4	3.4				
58.0	30.5	1.5	34.5	2.1	35.8	2.4				
危険角度 (°)	30		30.5		32		47		62.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SB性能 40mブーム + 2m + 30mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
7.0	84.5	10.0								
8.0	83.8	10.0								
9.0	83.2	10.0								
10.0	82.5	10.0								



10.85m — 35m

スーパーラフィングジブ【40mブーム時】

SC性能 40mブーム + 2m + 10.85mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
6.0	84.1	24.0			
7.0	83.2	24.0			
8.0	82.2	24.0	84.2	24.0	
9.0	81.2	24.0	83.1	24.0	
10.0	80.2	24.0	82.1	24.0	
11.0	79.2	24.0	81.1	24.0	
12.0	78.2	24.0	80.1	24.0	
14.0	76.2	24.0	78.0	24.0	
16.0	74.1	24.0	75.9	24.0	
18.0	72.0	24.0	73.8	24.0	
20.0	69.8	24.0	71.6	24.0	
22.0	67.6	24.0	69.3	24.0	
24.0	65.1	22.4	66.8	21.7	
26.0	62.5	19.0	64.4	20.0	
28.0	59.9	16.0	61.7	16.9	
30.0	57.1	13.5	59.0	14.2	
32.0	54.2	11.3	56.0	11.9	
34.0	51.2	9.4	53.0	9.9	
36.0	48.0	7.6	49.9	8.1	
38.0	44.7	6.0	46.5	6.5	
40.0	41.3	4.6	42.9	5.0	
42.0	37.5	3.4	38.9	3.7	
危険角度 (°)	34	35	36	47	62.5
標準フック	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
巻掛本数	2	2	2	2	2

SC性能 40mブーム + 2m + 15mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
5.0	84.3	12.0			
6.0	83.4	12.0			
7.0	82.5	12.0			
8.0	81.6	12.0			
9.0	80.6	12.0	84.6	12.0	
10.0	79.7	12.0	83.6	12.0	
11.0	78.7	12.0	82.6	12.0	
12.0	77.8	12.0	81.5	12.0	
14.0	75.9	12.0	79.5	12.0	
16.0	74.0	12.0	77.5	12.0	
18.0	72.0	12.0	75.4	12.0	
20.0	69.9	12.0	73.4	12.0	
22.0	67.9	12.0	71.3	12.0	
24.0	65.7	12.0	69.3	12.0	
26.0	63.6	12.0	67.1	12.0	
28.0	61.4	12.0	65.0	12.0	
30.0	59.1	12.0	62.7	12.0	
32.0	56.8	12.0	60.3	12.0	
34.0	54.3	10.6	57.8	11.9	
36.0	51.6	8.9	55.0	10.1	
38.0	48.8	7.3	52.1	8.4	
40.0	45.9	6.0	49.0	6.9	
42.0	42.8	4.7	45.9	5.6	
44.0	39.5	3.6	42.5	4.3	
46.0	36.0	2.6	38.8	3.2	
危険角度 (°)	34	35	36	47	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SC性能 40mブーム + 2m + 20mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
6.0	84.2	12.0			
7.0	83.3	12.0			
8.0	82.5	12.0			
9.0	81.6	12.0			
10.0	80.8	12.0			
11.0	80.0	12.0	84.5	12.0	
12.0	79.1	12.0	83.7	12.0	
14.0	77.4	12.0	81.9	12.0	
16.0	75.7	12.0	80.2	12.0	
18.0	73.9	12.0	78.4	12.0	
20.0	72.1	12.0	76.5	12.0	
22.0	70.3	12.0	74.7	12.0	
24.0	68.4	12.0	72.8	12.0	
26.0	66.5	12.0	70.8	12.0	
28.0	64.6	12.0	68.8	12.0	
30.0	62.6	12.0	66.8	11.4	
32.0	60.5	11.4	64.6	10.9	
34.0	58.3	10.7	62.4	10.4	
36.0	56.1	10.2	60.2	10.0	
38.0	53.7	8.7	57.9	9.6	
40.0	51.2	7.3	55.4	8.7	
42.0	48.5	6.1	52.7	7.3	
44.0	45.6	5.0	49.9	6.1	
46.0	42.7	3.9	46.9	4.9	
48.0	39.6	3.0	43.8	3.9	
50.0	36.5	2.1	40.4	2.9	
52.0			36.7	2.0	
危険角度 (°)	34	35	36	47	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SC性能 40mブーム + 2m + 25mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
6.0	84.6	12.0			
7.0	83.8	12.0			
8.0	83.1	12.0			
9.0	82.3	12.0			
10.0	81.6	12.0			
11.0	80.8	12.0			
12.0	80.1	12.0			
14.0	78.5	12.0	84.0	12.0	
16.0	76.9	12.0	82.4	12.0	
18.0	75.3	12.0	80.7	12.0	
20.0	73.7	12.0	79.0	12.0	
22.0	72.0	12.0	77.3	11.8	
24.0	70.3	12.0	75.5	11.1	
26.0	68.7	12.0	73.8	10.4	
28.0	66.9	11.1	72.0	9.8	
30.0	65.0	10.3	70.1	9.3	
32.0	63.2	9.6	68.3	8.8	
34.0	61.3	8.9	66.4	8.3	
36.0	59.3	8.3	64.4	7.9	
38.0	57.4	7.8	62.3	7.6	
40.0	55.2	7.3	60.2	7.2	
42.0	53.0	6.9	58.0	6.9	
44.0	50.7	6.1	55.7	6.6	
46.0	48.2	5.1	53.3	6.4	
48.0	45.6	4.1	50.6	5.3	
50.0	42.9	3.3	47.7	4.4	
52.0	40.1	2.5	44.7	3.4	
54.0	37.1	1.7	41.6	2.6	
56.0			38.2	1.8	
危険角度 (°)	34.5	35	36	47	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SC性能 40mブーム + 2m + 30mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
7.0	84.5	10.0			
8.0	83.8	10.0			
9.0	83.2	10.0			
10.0	82.5	10.0			
11.0	81.8	10.0			
12.0	81.1	10.0			
14.0	79.7	10.0			
16.0	78.3	10.0	84.3	10.0	
18.0	76.8	10.0	82.8	10.0	
20.0	75.2	10.0	81.3	10.0	
22.0	73.7	10.0	79.8	10.0	
24.0	72.1	10.0	78.2	9.6	
26.0	70.6	10.0	76.6	9.0	
28.0	69.0	9.7	74.9	8.5	
30.0	67.3	9.0	73.3	8.0	
32.0	65.7	8.3	71.6	7.5	
34.0	64.0	7.7	69.9	7.1	
36.0	62.3	7.1	68.1	6.8	
38.0	60.5	6.6	66.4	6.4	
40.0	58.7	6.3	64.4	6.1	
42.0	56.9	5.9	62.4	5.9	
44.0	54.9	5.6	60.3	5.6	
46.0	52.8	5.3	58.2	5.4	
48.0	50.6	5.1	56.0	5.2	
50.0	48.2	4.3	53.7	5.0	
52.0	45.7	3.5	51.3	4.7	
54.0	43.1	2.7	48.6	3.9	
56.0	40.4	2.0	45.8	3.1	
58.0	37.6	1.4	42.7	2.3	
60.0			39.4	1.6	
62.0			38.1	1.4	
危険角度 (°)	35	36	36	47.5	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SC性能 40mブーム + 2m + 35mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
8.0	84.3	8.0			
9.0	83.7	8.0			
10.0	83.1	8.0			
11.0	82.4	8.0			
12.0	81.8	8.0			
14.0	80.5	8.0			
16.0	79.2	8.0			
18.0	77.8	7.9	84.0	5.1	
20.0	76.3	7.2	82.6	4.8	
22.0	74.9	6.6	81.2	4.5	
24.0	73.4	6.0	79.7	4.3	
26.0	71.9	5.6	78.2	4.0	
28.0	70.4	5.2	76.7	3.8	
30.0	68.9	4.8	75.2	3.6	
32.0	67.3	4.5	73.5	3.4	
34.0	65.7	4.3	71.8	3.2	
36.0	64.1	4.0	70.1	3.0	
38.0	62.4	3.8	68.3	2.9	
40.0	60.7	3.6	66.5	2.7	
42.0	59.0	3.4	64.7	2.6	
44.0	57.3	3.2	62.9	2.4	
46.0	55.4	3.0	61.1	2.3	
48.0	53.6	2.8	59.3	2.2	
50.0	51.7	2.6	57.4	2.1	
52.0	49.7	2.5	55.4	2.0	
54.0	47.7	2.4	53.4	1.9	
56.0	45.5	2.2	51.2	1.8	
58.0	43.3	2.1	49.0	1.7	
60.0	40.8	1.7	46.4	1.7	
62.0			43.7	1.6	
64.0			40.7	1.4	
66.0			40.3	1.4	
危険角度 (°)	39	39	39	47.5	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1



10.85m — 35m

スーパーラフィングジブ【40mブーム時】

SD性能 40mブーム + 2m + 10.85mSLジブ

オフセット	5°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
6.0	84.1 24.0				
7.0	83.2 24.0				
8.0	82.2 24.0	84.2 24.0			
9.0	81.2 24.0	83.1 24.0			
10.0	80.2 24.0	82.1 24.0	84.9 24.0		
11.0	79.2 24.0	81.1 24.0	83.8 24.0		
12.0	78.2 24.0	80.1 24.0	82.8 24.0	84.7 22.6	
14.0	76.2 24.0	78.0 24.0	80.6 24.0	22.6 83.7	20.7
16.0	74.1 24.0	75.9 24.0	78.4 24.0	80.2 21.9	81.3 20.4
18.0	72.0 24.0	73.8 24.0	76.1 23.3	77.7 21.4	78.8 20.2
20.0	69.8 24.0	71.6 24.0	73.7 22.3	75.2 20.2	76.2 19.3
22.0	67.6 23.7	69.3 23.4	71.3 20.7	72.6 19.1	73.6 18.5
24.0	65.0 19.9	66.8 21.0	68.8 19.4	70.0 18.2	70.7 17.7
26.0	62.4 16.6	64.2 17.6	66.2 18.3	67.4 17.3	67.8 17.0
28.0	59.7 13.8	61.5 14.7	63.4 15.8	64.7 16.5	64.7 16.4
30.0	56.9 11.4	58.8 12.2	60.5 13.1	61.7 13.7	
32.0	54.0 9.3	55.9 10.0	57.5 10.8	58.6 11.3	
34.0	51.0 7.5	52.9 8.1	54.4 8.8	55.2 9.1	
36.0	47.9 5.9	49.7 6.4	51.1 6.9	51.5 7.2	
38.0	44.6 4.4	46.3 4.8	47.6 5.3	47.7 5.4	
40.0	41.1 3.1	42.7 3.5	43.8 3.8		
危険角度 (°)	39	40	41	47	62.5
標準フック	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
巻掛本数	2	2	2	2	2

SD性能 40mブーム + 2m + 15mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
5.0	84.3 12.0				
6.0	83.4 12.0				
7.0	82.5 12.0				
8.0	81.6 12.0				
9.0	80.6 12.0	84.6 12.0			
10.0	79.7 12.0	83.6 12.0			
11.0	78.7 12.0	82.6 12.0			
12.0	77.8 12.0	81.5 12.0			
14.0	75.9 12.0	79.5 12.0	83.0 12.0		
16.0	74.0 12.0	77.5 12.0	81.0 12.0	83.7 12.0	
18.0	72.0 12.0	75.4 12.0	78.9 12.0	81.6 12.0	83.4 12.0
20.0	69.9 12.0	73.4 12.0	76.8 12.0	79.4 12.0	81.1 12.0
22.0	67.9 12.0	71.3 12.0	74.6 12.0	77.1 12.0	78.6 12.0
24.0	65.7 12.0	69.3 12.0	72.4 12.0	74.8 12.0	76.2 12.0
26.0	63.6 12.0	67.1 12.0	70.1 12.0	72.4 12.0	73.5 12.0
28.0	61.4 12.0	65.0 12.0	67.7 12.0	69.9 12.0	70.7 12.0
30.0	59.1 12.0	62.7 12.0	65.3 12.0	67.4 12.0	67.8 12.0
32.0	56.7 10.6	60.3 12.0	62.9 12.0	64.7 12.0	64.8 12.0
34.0	54.1 8.8	57.6 10.1	60.3 11.2	61.9 11.9	
36.0	51.5 7.2	54.9 8.4	57.5 9.4	58.8 9.9	
38.0	48.7 5.7	51.9 6.8	54.5 7.7	55.6 8.1	
40.0	45.8 4.4	48.9 5.4	51.4 6.1	52.2 6.4	
42.0	42.7 3.3	45.7 4.1	48.1 4.7	48.5 4.9	
44.0	39.5 2.2	42.3 2.9	44.3 3.4		
危険角度 (°)	39	40	41	47	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SD性能 40mブーム + 2m + 20mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
6.0	84.2 12.0				
7.0	83.3 12.0				
8.0	82.5 12.0				
9.0	81.6 12.0				
10.0	80.8 12.0				
11.0	80.0 12.0	84.5 12.0			
12.0	79.1 12.0	83.7 12.0			
14.0	77.4 12.0	81.9 12.0			
16.0	75.7 12.0	80.2 12.0	84.4 12.0		
18.0	73.9 12.0	78.4 12.0	82.6 12.0		
20.0	72.1 12.0	76.5 12.0	80.7 12.0	84.1 11.6	
22.0	70.3 12.0	74.7 12.0	78.8 12.0	82.0 11.2	84.3 10.2
24.0	68.4 12.0	72.8 12.0	76.9 12.0	79.8 10.9	81.9 10.0
26.0	66.5 12.0	70.8 12.0	74.9 11.6	77.6 10.6	79.5 9.8
28.0	64.6 12.0	68.8 12.0	72.7 11.1	75.4 10.3	77.0 9.7
30.0	62.6 12.0	66.8 11.4	70.6 10.7	73.1 10.1	74.5 9.6
32.0	60.5 11.4	64.6 10.9	68.4 10.3	70.7 9.9	71.9 9.6
34.0	58.3 10.2	62.4 10.4	66.1 10.0	68.3 9.7	69.2 9.5
36.0	55.9 8.6	60.2 10.0	63.7 9.6	65.7 9.4	66.5 9.1
38.0	53.5 7.1	57.8 8.6	61.2 9.3	63.1 9.0	63.6 8.8
40.0	51.0 5.8	55.2 7.2	58.5 8.3	60.3 8.7	
42.0	48.3 4.6	52.5 5.9	55.7 6.9	57.2 7.5	
44.0	45.5 3.6	49.7 4.7	52.7 5.6	53.9 6.0	
46.0	42.6 2.6	46.8 3.6	49.5 4.3	50.3 4.7	
48.0	39.5 1.7	43.7 2.6	46.1 3.2		
50.0			42.3 2.2		
危険角度 (°)	39	40.5	41	47	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SD性能 40mブーム + 2m + 25mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
6.0	84.6 12.0				
7.0	83.8 12.0				
8.0	83.1 12.0				
9.0	82.3 12.0				
10.0	81.6 12.0				
11.0	80.8 12.0				
12.0	80.1 12.0				
14.0	78.5 12.0	84.0 12.0			
16.0	76.9 12.0	82.4 12.0			
18.0	75.3 12.0	80.7 12.0			
20.0	73.7 12.0	79.0 12.0	84.1 10.7		
22.0	72.0 12.0	77.3 11.8	82.2 10.2		
24.0	70.3 12.0	75.5 11.1	80.4 9.7	84.5 8.7	
26.0	68.7 12.0	73.8 10.4	78.5 9.3	82.5 8.4	
28.0	66.9 11.1	72.0 9.8	76.5 8.9	80.5 8.2	83.0 7.3
30.0	65.0 10.3	70.1 9.3	74.6 8.5	78.4 7.9	80.6 7.2
32.0	63.2 9.6	68.3 8.8	72.5 8.2	76.3 7.7	78.3 7.1
34.0	61.3 8.9	66.4 8.3	70.5 7.9	74.1 7.5	75.8 7.1
36.0	59.3 8.3	64.4 7.9	68.4 7.6	71.8 7.3	73.3 7.0
38.0	57.4 7.8	62.3 7.6	66.2 7.4	69.5 7.2	70.6 7.0
40.0	55.2 7.0	60.2 7.2	63.9 7.1	67.0 7.1	67.9 7.0
42.0	52.8 5.8	58.0 6.9	61.6 6.9	64.5 6.9	64.9 6.9
44.0	50.4 4.7	55.6 6.2	59.2 6.7	61.8 6.8	
46.0	47.9 3.8	53.1 5.1	56.6 6.2	58.8 6.6	
48.0	45.4 2.9	50.4 4.1	53.9 5.1	55.5 5.7	
50.0	42.7 2.1	47.5 3.1	50.9 4.0	52.0 4.5	
52.0	39.9 1.3	44.5 2.3	47.7 3.0	48.2 3.3	
54.0		41.4 1.5	44.1 2.1		
危険角度 (°)	39	40.5	41	47	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SD性能 40mブーム + 2m + 30mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
7.0	84.5 10.0				
8.0	83.8 10.0				
9.0	83.2 10.0				
10.0	82.5 10.0				
11.0	81.8 10.0				
12.0	81.1 10.0				
14.0	79.7 10.0				
16.0	78.3 10.0	84.3 10.0			
18.0	76.8 10.0	82.8 10.0			
20.0	75.2 10.0	81.3 10.0			
22.0	73.7 10.0	79.8 10.0			
24.0	72.1 10.0	78.2 9.6	83.7 8.1		
26.0	70.6 10.0	76.6 9.0	82.0 7.7		
28.0	69.0 9.7	74.9 8.5	80.2 7.5	84.8 6.3	
30.0	67.3 9.0	73.3 8.0	78.5 7.2	82.9 6.1	
32.0	65.7 8.3	71.6 7.5	76.7 6.9	80.9 5.9	83.9 5.3
34.0	64.0 7.7	69.9 7.1	74.8 6.6	78.8 5.8	81.7 5.2
36.0	62.3 7.1	68.1 6.8	72.9 6.3	76.7 5.6	79.5 5.1
38.0	60.5 6.6	66.4 6.4	71.0 6.1	74.6 5.5	77.1 5.1
40.0	58.7 6.3	64.4 6.1	69.0 5.9	72.4 5.4	74.7 5.0
42.0	56.9 5.9	62.4 5.9	66.9 5.7	70.1 5.3	72.1 5.0
44.0	54.9 5.6	60.3 5.6	64.8 5.5	67.8 5.2	69.3 5.0
46.0	52.6 4.8	58.2 5.4	62.6 5.3	65.3 5.1	66.4 5.0
48.0	50.2 3.9	56.0 5.2	60.3 5.1	62.8 5.1	63.5 5.0
50.0	47.8 3.0	53.5 4.4	57.8 5.0	60.1 5.0	
52.0	45.4 2.3	50.9 3.6	55.2 4.6	57.2 5.0	
54.0	42.8 1.6	48.2 2.7	52.2 3.7	54.0 4.3	
56.0		45.4 2.0	49.1 2.8	50.5 3.2	
58.0		42.4 1.3	45.8 2.0		
危険角度 (°)	41	42	43	47.5	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SD性能 40mブーム + 2m + 35mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
8.0	84.3	8.0								
9.0	83.7	8.0								
10.0	83.1	8.0								
11.0	82.4	8.0								
12.0	81.8	8.0								
14.0	80.5	8.0								
16.0	79.2	8.0								
18.0	77.8	7.9	84.0	5.1						
20.0	76.3	7.2	82.6	4.8						
22.0	74.9	6.6	81.2	4.5						
24.0	73.4	6.0	79.7	4.3						
26.0	71.9	5.6	78.2	4.0	84.3	3.0				
28.0	70.4	5.2	76.7	3.8	83.0	2.8				
30.0	68.9	4.8	75.2	3.6	81.7	2.7				
32.0	67.3	4.5	73.5	3.4	80.3	2.5	84.1	2.0		
34.0	65.7	4.3	71.8	3.2	78.5	2.4	82.3	1.9		
36.0	64.1	4.0	70.1	3.0	76.6	2.3	80.5	1.8	84.1	1.5
38.0	62.4	3.8	68.3	2.9	74.8	2.2	78.6	1.8	82.1	1.5
40.0	60.7	3.6	66.5	2.7	72.8	2.1	76.7	1.7	79.9	1.5
42.0	59.0	3.4	64.7	2.6	70.9	2.0	74.7	1.6	77.7	1.4
44.0	57.3	3.2	62.9	2.4	68.8	1.9	72.6	1.6	75.4	1.4
46.0	55.4	3.0	61.1	2.3	66.8	1.8	70.5	1.5	73.0	1.4
48.0	53.6	2.8	59.3	2.2	64.6	1.8	68.3	1.5	70.3	1.4
50.0	51.7	2.6	57.4	2.1	62.5	1.7	66.0	1.5	67.6	1.4
52.0	49.7	2.5	55.4	2.0	60.3	1.6	63.5	1.4	64.6	1.4
54.0	47.7	2.4	53.4	1.9	58.0	1.6	60.9	1.4		
56.0	45.3	1.8	51.2	1.8	55.6	1.5	58.1	1.4		
58.0			49.0	1.7	53.1	1.5	55.2	1.4		
60.0			46.4	1.7	50.4	1.5	51.9	1.4		
62.0					47.3	1.4	48.4	1.4		
危険角度 (°)	43		44		44		47.5		62.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	



10.85m — 35m

スーパーラフィングジブ【40mブーム時】

SE性能 40mブーム + 2m + 10.85mSLジブ

オフセット	5°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.1	24.0			
7.0	83.2	24.0			
8.0	82.2	24.0	84.2	24.0	
9.0	81.2	24.0	83.1	24.0	
10.0	80.2	24.0	82.1	24.0	
11.0	79.2	24.0	81.1	24.0	
12.0	78.2	24.0	80.1	24.0	
14.0	76.2	24.0	78.0	24.0	
16.0	74.1	24.0	75.9	24.0	
18.0	72.0	24.0	73.8	24.0	
20.0	69.8	23.8	71.6	24.0	
22.0	67.3	19.5	69.1	20.8	71.3
24.0	64.7	16.0	66.6	17.1	68.7
26.0	62.1	13.1	64.0	14.0	66.0
28.0	59.5	10.5	61.3	11.4	63.2
30.0	56.7	8.4	58.6	9.1	60.3
32.0	53.8	6.5	55.6	7.1	57.3
34.0	50.8	4.8	52.6	5.4	54.2
36.0	47.7	3.3	49.5	3.8	50.9
38.0					
危険角度 (°)	46	47	47	47	62.5
標準フック	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
巻掛本数	2	2	2	2	2

SE性能 40mブーム + 2m + 15mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
5.0	84.3	12.0			
6.0	83.4	12.0			
7.0	82.5	12.0			
8.0	81.6	12.0			
9.0	80.6	12.0	84.6	12.0	
10.0	79.7	12.0	83.6	12.0	
11.0	78.7	12.0	82.6	12.0	
12.0	77.8	12.0	81.5	12.0	
14.0	75.9	12.0	79.5	12.0	
16.0	74.0	12.0	77.5	12.0	
18.0	72.0	12.0	75.4	12.0	
20.0	69.9	12.0	73.4	12.0	
22.0	67.9	12.0	71.3	12.0	
24.0	65.7	12.0	69.3	12.0	
26.0	63.6	12.0	67.1	12.0	
28.0	61.4	11.8	65.0	12.0	
30.0	59.0	9.6	62.6	11.3	65.3
32.0	56.5	7.7	60.0	9.2	62.8
34.0	54.0	6.1	57.4	7.4	60.1
36.0	51.3	4.6	54.6	5.8	57.3
38.0	48.6	3.3	51.7	4.4	54.3
40.0			48.7	3.1	51.2
42.0					
危険角度 (°)	46	47	47	47	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SE性能 40mブーム + 2m + 20mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.2	12.0			
7.0	83.3	12.0			
8.0	82.5	12.0			
9.0	81.6	12.0			
10.0	80.8	12.0			
11.0	80.0	12.0	84.5	12.0	
12.0	79.1	12.0	83.7	12.0	
14.0	77.4	12.0	81.9	12.0	
16.0	75.7	12.0	80.2	12.0	
18.0	73.9	12.0	78.4	12.0	
20.0	72.1	12.0	76.5	12.0	
22.0	70.3	12.0	74.7	12.0	
24.0	68.4	12.0	72.8	12.0	
26.0	66.5	12.0	70.8	12.0	
28.0	64.6	12.0	68.8	12.0	
30.0	62.5	11.0	66.8	11.4	70.6
32.0	60.2	9.1	64.6	10.9	68.4
34.0	57.9	7.5	62.3	9.3	66.1
36.0	55.6	6.0	60.0	7.7	63.7
38.0	53.2	4.7	57.5	6.2	61.0
40.0	50.7	3.5	55.0	4.9	58.3
42.0	48.0	2.4	52.3	3.7	55.6
44.0			49.5	2.6	52.6
46.0					
危険角度 (°)	46	47	47	47	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SE性能 40mブーム + 2m + 25mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.6	12.0			
7.0	83.8	12.0			
8.0	83.1	12.0			
9.0	82.3	12.0			
10.0	81.6	12.0			
11.0	80.8	12.0			
12.0	80.1	12.0			
14.0	78.5	12.0	84.0	12.0	
16.0	76.9	12.0	82.4	12.0	
18.0	75.3	12.0	80.7	12.0	
20.0	73.7	12.0	79.0	12.0	
22.0	72.0	12.0	77.3	11.8	82.2
24.0	70.3	12.0	75.5	11.1	80.4
26.0	68.7	12.0	73.8	10.4	78.5
28.0	66.9	11.1	72.0	9.8	76.5
30.0	65.0	10.3	70.1	9.3	74.6
32.0	63.2	9.6	68.3	8.8	72.5
34.0	61.3	8.7	66.4	8.3	70.5
36.0	59.2	7.2	64.4	7.9	68.4
38.0	57.1	5.9	62.3	7.6	66.2
40.0	54.9	4.7	60.0	6.4	63.9
42.0	52.5	3.6	57.7	5.2	61.6
44.0	50.1	2.6	55.3	4.1	59.0
46.0	47.6	1.8	52.7	3.1	56.4
48.0			50.0	2.2	53.6
50.0			47.2	1.3	50.6
52.0					
危険角度 (°)	46	47	47	47	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SE性能 40mブーム + 2m + 30mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
7.0	84.5	10.0			
8.0	83.8	10.0			
9.0	83.2	10.0			
10.0	82.5	10.0			
11.0	81.8	10.0			
12.0	81.1	10.0			
14.0	79.7	10.0			
16.0	78.3	10.0	84.3	10.0	
18.0	76.8	10.0	82.8	10.0	
20.0	75.2	10.0	81.3	10.0	
22.0	73.7	10.0	79.8	10.0	
24.0	72.1	10.0	78.2	9.6	
26.0	70.6	10.0	76.6	9.0	
28.0	69.0	9.7	74.9	8.5	
30.0	67.3	9.0	73.3	8.0	
32.0	65.7	8.3	71.6	7.5	
34.0	64.0	7.7	69.9	7.1	
36.0	62.3	7.1	68.1	6.8	
38.0	60.5	6.6	66.4	6.4	
40.0	58.6	5.7	64.4	6.1	
42.0	56.5	4.6	62.4	5.9	
44.0	54.2	3.6	60.3	5.4	
46.0	52.0	2.8	57.9	4.4	
48.0	49.6	1.9	55.5	3.5	
50.0			53.0	2.6	
52.0			50.4	1.8	
54.0					
56.0					
危険角度 (°)	48	49	49	49	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SE性能 40mブーム + 2m + 35mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.3	8.0			
9.0	83.7	8.0			
10.0	83.1	8.0			
11.0	82.4	8.0			
12.0	81.8	8.0			
14.0	80.5	8.0			
16.0	79.2	8.0			
18.0	77.8	7.9	84.0	5.1	
20.0	76.3	7.2	82.6	4.8	
22.0	74.9	6.6	81.2	4.5	
24.0	73.4	6.0	79.7	4.3	
26.0	71.9	5.6	78.2	4.0	
28.0	70.4	5.2	76.7	3.8	
30.0	68.9	4.8	75.2	3.6	
32.0	67.3	4.5	73.5	3.4	
34.0	65.7	4.3	71.8	3.2	
36.0	64.1	4.0	70.1	3.0	
38.0	62.4	3.8	68.3	2.9	
40.0	60.7	3.6	66.5	2.7	
42.0	59.0	3.4	64.7	2.6	
44.0	57.3	3.2	62.9	2.4	
46.0	55.4	3.0	61.1	2.3	
48.0	53.6	2.8	59.3	2.2	
50.0	51.5	2.1	57.4	2.1	
52.0	49.3	1.4	55.4	2.0	
54.0			53.4	1.9	
56.0			51.1	1.5	
58.0					
60.0					
危険角度 (°)	48	49	51	51	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1



10.85m — 35m

スーパーラフィングジブ【40mブーム時】

SF性能 40mブーム + 2m + 10.85mSLジブ

オフセット	5°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.1	24.0								
7.0	83.2	24.0								
8.0	82.2	24.0	84.2	24.0						
9.0	81.2	24.0	83.1	24.0						
10.0	80.2	24.0	82.1	24.0	84.9	24.0				
11.0	79.2	24.0	81.1	24.0	83.8	24.0				
12.0	78.2	24.0	80.1	24.0	82.8	24.0	84.7	22.6		
14.0	76.2	24.0	78.0	24.0	80.6	24.0	82.6	22.6	83.7	20.7
16.0	74.1	24.0	75.9	24.0	78.4	24.0	80.2	21.9	81.3	20.4
18.0	72.0	24.0	73.8	24.0	76.1	23.3	77.7	21.4	78.8	20.2
20.0	69.7	20.9	71.5	22.3	73.7	22.3	75.2	20.2	76.2	19.3
22.0	67.2	17.0	69.0	18.2	71.2	19.8	72.6	19.1	73.6	18.5
24.0	64.6	13.7	66.4	14.8	68.6	16.2	70.0	17.2	70.7	17.7
26.0	62.0	10.9	63.8	11.9	65.9	13.1	67.2	14.0	67.6	14.3
28.0	59.3	8.5	61.1	9.4	63.1	10.5	64.3	11.2	64.4	11.4
30.0	56.5	6.5	58.4	7.3	60.2	8.2	61.3	8.8		
32.0	53.6	4.7	55.5	5.4	57.2	6.2	58.2	6.6		
34.0	50.6	3.1	52.5	3.7	54.1	4.4	54.8	4.8		
36.0					50.8	2.8	51.2	3.1		
危険角度 (°)	49		50		50		50		63	
標準フック	24t		24t		24t		24t		24t	
フック質量 (t)	0.88		0.88		0.88		0.88		0.88	
巻掛本数	2		2		2		2		2	

SF性能 40mブーム + 2m + 15mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
5.0	84.3	12.0								
6.0	83.4	12.0								
7.0	82.5	12.0								
8.0	81.6	12.0								
9.0	80.6	12.0	84.6	12.0						
10.0	79.7	12.0	83.6	12.0						
11.0	78.7	12.0	82.6	12.0						
12.0	77.8	12.0	81.5	12.0						
14.0	75.9	12.0	79.5	12.0	83.0	12.0				
16.0	74.0	12.0	77.5	12.0	81.0	12.0	83.7	12.0		
18.0	72.0	12.0	75.4	12.0	78.9	12.0	81.6	12.0	83.4	12.0
20.0	69.9	12.0	73.4	12.0	76.8	12.0	79.4	12.0	81.1	12.0
22.0	67.9	12.0	71.3	12.0	74.6	12.0	77.1	12.0	78.6	12.0
24.0	65.7	12.0	69.3	12.0	72.4	12.0	74.8	12.0	76.2	12.0
26.0	63.6	12.0	67.1	12.0	70.1	12.0	72.4	12.0	73.5	12.0
28.0	61.2	9.8	64.9	11.6	67.7	12.0	69.9	12.0	70.7	12.0
30.0	58.8	7.8	62.4	9.4	65.2	10.8	67.4	11.9	67.8	12.0
32.0	56.4	6.0	59.9	7.5	62.6	8.7	64.5	9.6	64.7	10.0
34.0	53.8	4.4	57.2	5.8	59.9	6.9	61.6	7.6		
36.0	51.2	3.1	54.5	4.3	57.1	5.2	58.5	5.8		
38.0			51.6	2.9	54.2	3.8	55.3	4.2		
40.0					51.1	2.4	51.9	2.8		
危険角度 (°)	49		50		50		50		62.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SF性能 40mブーム + 2m + 20mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.2	12.0								
7.0	83.3	12.0								
8.0	82.5	12.0								
9.0	81.6	12.0								
10.0	80.8	12.0								
11.0	80.0	12.0	84.5	12.0						
12.0	79.1	12.0	83.7	12.0						
14.0	77.4	12.0	81.9	12.0						
16.0	75.7	12.0	80.2	12.0	84.4	12.0				
18.0	73.9	12.0	78.4	12.0	82.6	12.0				
20.0	72.1	12.0	76.5	12.0	80.7	12.0	84.1	11.6		
22.0	70.3	12.0	74.7	12.0	78.8	12.0	82.0	11.2	84.3	10.2
24.0	68.4	12.0	72.8	12.0	76.9	12.0	79.8	10.9	81.9	10.0
26.0	66.5	12.0	70.8	12.0	74.9	11.6	77.6	10.6	79.5	9.8
28.0	64.5	11.2	68.8	12.0	72.7	11.1	75.4	10.3	77.0	9.7
30.0	62.3	9.2	66.8	11.4	70.6	10.7	73.1	10.1	74.5	9.6
32.0	60.0	7.4	64.5	9.4	68.4	10.3	70.7	9.9	71.9	9.6
34.0	57.7	5.8	62.2	7.7	66.0	9.2	68.3	9.7	69.2	9.5
36.0	55.4	4.5	59.8	6.1	63.5	7.5	65.6	8.6	66.5	9.1
38.0	53.0	3.2	57.4	4.7	60.9	6.0	62.9	6.9	63.4	7.3
40.0	50.5	2.1	54.8	3.5	58.2	4.6	60.0	5.4		
42.0			52.1	2.4	55.5	3.4	57.0	4.0		
44.0					52.5	2.2	53.8	2.7		
危険角度 (°)	49		50		50		51		62.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SF性能 40mブーム + 2m + 25mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.6	12.0								
7.0	83.8	12.0								
8.0	83.1	12.0								
9.0	82.3	12.0								
10.0	81.6	12.0								
11.0	80.8	12.0								
12.0	80.1	12.0								
14.0	78.5	12.0	84.0	12.0						
16.0	76.9	12.0	82.4	12.0						
18.0	75.3	12.0	80.7	12.0						
20.0	73.7	12.0	79.0	12.0	84.1	10.7				
22.0	72.0	12.0	77.3	11.8	82.2	10.2				
24.0	70.3	12.0	75.5	11.1	80.4	9.7	84.5	8.7		
26.0	68.7	12.0	73.8	10.4	78.5	9.3	82.5	8.4		
28.0	66.9	11.1	72.0	9.8	76.5	8.9	80.5	8.2	83.0	7.3
30.0	65.0	10.3	70.1	9.3	74.6	8.5	78.4	7.9	80.6	7.2
32.0	63.0	8.6	68.3	8.8	72.5	8.2	76.3	7.7	78.3	7.1
34.0	61.0	7.0	66.4	8.3	70.5	7.9	74.1	7.5	75.8	7.1
36.0	59.0	5.6	64.4	7.7	68.4	7.6	71.8	7.3	73.3	7.0
38.0	56.9	4.4	62.1	6.3	66.2	7.4	69.5	7.2	70.6	7.0
40.0	54.7	3.3	59.8	5.0	63.9	6.6	67.0	7.1	67.9	7.0
42.0	52.3	2.3	57.5	3.9	61.4	5.3	64.4	6.3	64.9	6.8
44.0	49.9	1.4	55.0	2.8	58.9	4.1	61.5	5.0		
46.0			52.5	1.9	56.3	3.0	58.3	3.8		
48.0					53.5	2.0	55.1	2.6		
50.0							51.6	1.5		
危険角度 (°)	49		50		51		51		62.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SF性能 40mブーム + 2m + 30mSLジブ

オフセット	0		15		30		45		60	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
7.0	84.5	10.0								
8.0	83.8	10.0								
9.0	83.2	10.0								
10.0	82.5	10.0								
11.0	81.8	10.0								
12.0	81.1	10.0								
14.0	79.7	10.0								
16.0	78.3	10.0	84.3	10.0						
18.0	76.8	10.0	82.8	10.0						
20.0	75.2	10.0	81.3	10.0						
22.0	73.7	10.0	79.8	10.0						
24.0	72.1	10.0	78.2	9.6	83.7	8.1				
26.0	70.6	10.0	76.6	9.0	82.0	7.7				
28.0	69.0	9.7	74.9	8.5	80.2	7.5	84.8	6.3		
30.0	67.3	9.0	73.3	8.0	78.5	7.2	82.9	6.1		
32.0	65.7	8.3	71.6	7.5	76.7	6.9	80.9	5.9	83.9	5.3
34.0	64.0	7.7	69.9	7.1	74.8	6.6	78.8	5.8	81.7	5.2
36.0	62.2	6.6	68.1	6.8	72.9	6.3	76.7	5.6	79.5	5.1
38.0	60.2	5.4	66.4	6.4	71.0	6.1	74.6	5.5	77.1	5.1
40.0	58.2	4.3	64.4	6.1	69.0	5.9	72.4	5.4	74.7	5.0
42.0	56.1	3.3	62.2	5.2	66.9	5.7	70.1	5.3	72.1	5.0
44.0	53.9	2.4	59.9	4.1	64.8	5.5	67.8	5.2	69.3	5.0
46.0	51.6	1.5	57.5	3.2	62.4	4.6	65.3	5.1	66.4	5.0
48.0			55.1	2.3	59.9	3.6	62.7	4.6	63.5	5.0
50.0			52.6	1.5	57.2	2.7	59.8	3.5		
52.0					54.5	1.8	56.8	2.5		
54.0							53.6	1.5		
危険角度 (°)	50		51		52		52		62.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	



10.85m — 35m

スーパーラフィングジブ【40mブーム時】

SG性能 40mブーム + 2m + 10.85mSLジブ

オフセット	5°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.1	24.0			
7.0	83.2	24.0			
8.0	82.2	24.0	84.2	24.0	
9.0	81.2	24.0	83.1	24.0	
10.0	80.2	24.0	82.1	24.0	
11.0	79.2	24.0	81.1	24.0	
12.0	78.2	24.0	80.1	24.0	
14.0	76.2	24.0	78.0	24.0	
16.0	74.1	24.0	75.9	24.0	
18.0	71.9	22.7	73.8	24.0	
20.0	69.5	18.1	71.4	19.5	
22.0	67.0	14.4	68.8	15.6	
24.0	64.4	11.3	66.3	12.4	
26.0	61.8	8.7	63.7	9.7	
28.0	59.2	6.5	61.0	7.4	
30.0	56.4	4.6	58.3	5.4	
32.0	53.5	3.0	55.4	3.6	
34.0					
危険角度 (°)	52	53	53	53	62.5
標準フック	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
巻掛本数	2	2	2	2	2

SG性能 40mブーム + 2m + 15mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
5.0	84.3	12.0			
6.0	83.4	12.0			
7.0	82.5	12.0			
8.0	81.6	12.0			
9.0	80.6	12.0	84.6	12.0	
10.0	79.7	12.0	83.6	12.0	
11.0	78.7	12.0	82.6	12.0	
12.0	77.8	12.0	81.5	12.0	
14.0	75.9	12.0	79.5	12.0	
16.0	74.0	12.0	77.5	12.0	
18.0	72.0	12.0	75.4	12.0	
20.0	69.9	12.0	73.4	12.0	
22.0	67.9	12.0	71.3	12.0	
24.0	65.7	12.0	69.3	12.0	
26.0	63.5	10.0	67.1	12.0	
28.0	61.1	7.8	64.8	9.6	
30.0	58.7	5.9	62.3	7.6	
32.0	56.3	4.2	59.7	5.7	
34.0	53.7	2.8	57.1	4.2	
36.0			54.3	2.7	
38.0				54.1	
危険角度 (°)	52	53	53	53	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SG性能 40mブーム + 2m + 20mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.2	12.0			
7.0	83.3	12.0			
8.0	82.5	12.0			
9.0	81.6	12.0			
10.0	80.8	12.0			
11.0	80.0	12.0	84.5	12.0	
12.0	79.1	12.0	83.7	12.0	
14.0	77.4	12.0	81.9	12.0	
16.0	75.7	12.0	80.2	12.0	
18.0	73.9	12.0	78.4	12.0	
20.0	72.1	12.0	76.5	12.0	
22.0	70.3	12.0	74.7	12.0	
24.0	68.4	12.0	72.8	12.0	
26.0	66.4	11.4	70.8	12.0	
28.0	64.3	9.2	68.8	11.6	
30.0	62.1	7.3	66.6	9.5	
32.0	59.8	5.6	64.3	7.6	
34.0	57.5	4.2	62.1	6.0	
36.0	55.2	2.9	59.7	4.6	
38.0	52.8	1.8	57.2	3.3	
40.0			54.7	2.1	
42.0					
44.0					
危険角度 (°)	52	53	53	53	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SG性能 40mブーム + 2m + 25mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.6	12.0			
7.0	83.8	12.0			
8.0	83.1	12.0			
9.0	82.3	12.0			
10.0	81.6	12.0			
11.0	80.8	12.0			
12.0	80.1	12.0			
14.0	78.5	12.0	84.0	12.0	
16.0	76.9	12.0	82.4	12.0	
18.0	75.3	12.0	80.7	12.0	
20.0	73.7	12.0	79.0	12.0	
22.0	72.0	12.0	77.3	11.8	
24.0	70.3	12.0	75.5	11.1	
26.0	68.7	12.0	73.8	10.4	
28.0	66.8	10.4	72.0	9.8	
30.0	64.8	8.5	70.1	9.3	
32.0	62.8	6.8	68.3	8.8	
34.0	60.8	5.4	66.2	7.6	
36.0	58.8	4.1	64.1	6.1	
38.0	56.7	2.9	61.8	4.8	
40.0	54.5	1.9	59.6	3.6	
42.0			57.2	2.6	
44.0			54.8	1.6	
46.0					
48.0					
危険角度 (°)	52.5	53	54	54	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SG性能 40mブーム + 2m + 30mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
7.0	84.5	10.0			
8.0	83.8	10.0			
9.0	83.2	10.0			
10.0	82.5	10.0			
11.0	81.8	10.0			
12.0	81.1	10.0			
14.0	79.7	10.0			
16.0	78.3	10.0	84.3	10.0	
18.0	76.8	10.0	82.8	10.0	
20.0	75.2	10.0	81.3	10.0	
22.0	73.7	10.0	79.8	10.0	
24.0	72.1	10.0	78.2	9.6	
26.0	70.6	10.0	76.6	9.0	
28.0	69.0	9.7	74.9	8.5	
30.0	67.3	9.0	73.3	8.0	
32.0	65.6	7.8	71.6	7.5	
34.0	63.7	6.4	69.9	7.1	
36.0	61.8	5.1	68.1	6.8	
38.0	59.8	3.9	66.3	6.2	
40.0	57.8	2.9	64.1	5.0	
42.0	55.7	2.0	61.8	3.9	
44.0			59.5	2.9	
46.0			57.1	2.0	
48.0					
50.0					
52.0					
危険角度 (°)	54	55	55	55	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SG性能 40mブーム + 2m + 35mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.3	8.0			
9.0	83.7	8.0			
10.0	83.1	8.0			
11.0	82.4	8.0			
12.0	81.8	8.0			
14.0	80.5	8.0			
16.0	79.2	8.0			
18.0	77.8	7.9	84.0	5.1	
20.0	76.3	7.2	82.6	4.8	
22.0	74.9	6.6	81.2	4.5	
24.0	73.4	6.0	79.7	4.3	
26.0	71.9	5.6	78.2	4.0	
28.0	70.4	5.2	76.7	3.8	
30.0	68.9	4.8	75.2	3.6	
32.0	67.3	4.5	73.5	3.4	
34.0	65.7	4.3	71.8	3.2	
36.0	64.1	4.0	70.1	3.0	
38.0	62.4	3.8	68.3	2.9	
40.0	60.7	3.6	66.5	2.7	
42.0	58.9	2.8	64.7	2.6	
44.0	56.9	2.0	62.9	2.4	
46.0			61.1	2.3	
48.0			59.3	2.2	
50.0			57.2	1.5	
52.0					
54.0					
56.0					
危険角度 (°)	56	56	56	56	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1



10.85m — 35m

スーパーラフィングジブ【40mブーム時】

SH性能 40mブーム + 2m + 10.85mSLジブ

オフセット	5°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.1 24.0				
7.0	83.2 24.0				
8.0	82.2 24.0	84.2 24.0			
9.0	81.2 24.0	83.1 24.0			
10.0	80.2 24.0	82.1 24.0	84.9 24.0		
11.0	79.2 24.0	81.1 24.0	83.8 24.0		
12.0	78.2 24.0	80.1 24.0	82.8 24.0	84.7 22.6	
14.0	76.2 24.0	78.0 24.0	80.6 24.0	82.6 22.6	83.7 20.7
16.0	74.1 24.0	75.9 24.0	78.4 24.0	80.2 21.9	81.3 20.4
18.0	71.8 19.5	73.6 21.1	76.1 23.3	77.7 21.4	78.8 20.2
20.0	69.3 15.3	71.2 16.7	73.5 18.5	75.2 20.0	76.2 19.3
22.0	66.8 11.8	68.7 13.1	71.0 14.7	72.5 15.9	73.4 16.5
24.0	64.3 9.0	66.1 10.1	68.3 11.5	69.7 12.5	70.4 13.0
26.0	61.7 6.6	63.5 7.6	65.6 8.8	67.0 9.6	67.3 10.0
28.0	59.0 4.5	60.8 5.4	62.8 6.5	64.1 7.2	64.1 7.4
30.0		58.1 3.4	59.9 4.5	61.1 5.0	
危険角度 (°)	57	57	58	58	62.5
標準フック	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
巻掛本数	2	2	2	2	2

SH性能 40mブーム + 2m + 15mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
5.0	84.3 12.0				
6.0	83.4 12.0				
7.0	82.5 12.0				
8.0	81.6 12.0				
9.0	80.6 12.0	84.6 12.0			
10.0	79.7 12.0	83.6 12.0			
11.0	78.7 12.0	82.6 12.0			
12.0	77.8 12.0	81.5 12.0			
14.0	75.9 12.0	79.5 12.0	83.0 12.0		
16.0	74.0 12.0	77.5 12.0	81.0 12.0	83.7 12.0	
18.0	72.0 12.0	75.4 12.0	78.9 12.0	81.6 12.0	83.4 12.0
20.0	69.9 12.0	73.4 12.0	76.8 12.0	79.4 12.0	81.1 12.0
22.0	67.9 12.0	71.3 12.0	74.6 12.0	77.1 12.0	78.6 12.0
24.0	65.6 10.2	69.3 12.0	72.4 12.0	74.8 12.0	76.2 12.0
26.0	63.3 7.8	67.0 9.9	70.0 11.5	72.4 12.0	73.5 12.0
28.0	61.0 5.8	64.6 7.6	67.5 9.2	69.8 10.2	70.6 10.8
30.0	58.6 4.0	62.1 5.7	65.0 7.1	67.1 8.1	67.7 8.6
32.0		59.6 3.9	62.4 5.2	64.3 6.1	64.7 6.5
34.0			59.7 3.5	61.3 4.3	
36.0				58.3 2.5	
危険角度 (°)	57	57	58	58	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SH性能 40mブーム + 2m + 20mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.2 12.0				
7.0	83.3 12.0				
8.0	82.5 12.0				
9.0	81.6 12.0				
10.0	80.8 12.0				
11.0	80.0 12.0	84.5 12.0			
12.0	79.1 12.0	83.7 12.0			
14.0	77.4 12.0	81.9 12.0			
16.0	75.7 12.0	80.2 12.0	84.4 12.0		
18.0	73.9 12.0	78.4 12.0	82.6 12.0		
20.0	72.1 12.0	76.5 12.0	80.7 12.0	84.1 11.6	
22.0	70.3 12.0	74.7 12.0	78.8 12.0	82.0 11.2	84.3 10.2
24.0	68.4 11.6	72.8 12.0	76.9 12.0	79.8 10.9	81.9 10.0
26.0	66.2 9.2	70.8 11.7	74.9 11.6	77.6 10.6	79.5 9.8
28.0	64.1 7.2	68.6 9.6	72.7 11.1	75.4 10.3	77.0 9.7
30.0	61.8 5.4	66.4 7.6	70.4 9.3	73.1 10.1	74.5 9.6
32.0	59.6 3.8	64.2 5.9	68.1 7.6	70.6 8.7	71.9 9.4
34.0		61.9 4.3	65.6 6.0	68.0 7.1	69.1 7.6
36.0			63.2 4.4	65.3 5.5	66.3 6.0
38.0				62.6 3.8	63.1 4.2
危険角度 (°)	58	60	61	61	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SH性能 40mブーム + 2m + 25mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.6 12.0				
7.0	83.8 12.0				
8.0	83.1 12.0				
9.0	82.3 12.0				
10.0	81.6 12.0				
11.0	80.8 12.0				
12.0	80.1 12.0				
14.0	78.5 12.0	84.0 12.0			
16.0	76.9 12.0	82.4 12.0			
18.0	75.3 12.0	80.7 12.0			
20.0	73.7 12.0	79.0 12.0	84.1 10.7		
22.0	72.0 12.0	77.3 11.8	82.2 10.2		
24.0	70.3 12.0	75.5 11.1	80.4 9.7	84.5 8.7	
26.0	68.5 10.4	73.8 10.4	78.5 9.3	82.5 8.4	
28.0	66.5 8.4	72.0 9.8	76.5 8.9	80.5 8.2	83.0 7.3
30.0	64.5 6.6	70.1 9.1	74.6 8.5	78.4 7.9	80.6 7.2
32.0	62.6 5.1	68.1 7.5	72.5 8.2	76.3 7.7	78.3 7.1
34.0	60.5 3.6	66.0 6.0	70.5 7.7	74.1 7.5	75.8 7.1
36.0	58.5 2.2	63.8 4.5	68.2 6.4	71.8 7.3	73.3 7.0
38.0		61.5 3.1	65.8 5.0	69.3 6.2	70.6 6.8
40.0			63.4 3.6	66.7 4.9	67.8 5.5
42.0				63.9 3.5	64.7 4.0
危険角度 (°)	58	60	61.5	62	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SH性能 40mブーム + 2m + 30mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
7.0	84.5 10.0				
8.0	83.8 10.0				
9.0	83.2 10.0				
10.0	82.5 10.0				
11.0	81.8 10.0				
12.0	81.1 10.0				
14.0	79.7 10.0				
16.0	78.3 10.0	84.3 10.0			
18.0	76.8 10.0	82.8 10.0			
20.0	75.2 10.0	81.3 10.0			
22.0	73.7 10.0	79.8 10.0			
24.0	72.1 10.0	78.2 9.6	83.7 8.1		
26.0	70.6 10.0	76.6 9.0	82.0 7.7		
28.0	68.9 9.4	74.9 8.5	80.2 7.5	84.8 6.3	
30.0	67.1 7.6	73.3 8.0	78.5 7.2	82.9 6.1	
32.0	65.2 6.1	71.6 7.5	76.7 6.9	80.9 5.9	83.9 5.3
34.0	63.3 4.7	69.9 7.1	74.8 6.6	78.8 5.8	81.7 5.2
36.0	61.4 3.4	67.9 6.0	72.9 6.3	76.7 5.6	79.5 5.1
38.0		65.8 4.6	71.0 6.1	74.6 5.5	77.1 5.1
40.0		63.6 3.4	68.8 5.4	72.4 5.4	74.7 5.0
42.0			66.5 4.2	70.1 5.3	72.1 5.0
44.0			64.2 3.0	67.6 4.4	69.3 5.0
46.0				65.0 3.1	66.3 3.8
48.0					63.2 2.5
危険角度 (°)	60	62	62	62.5	62.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SH性能 40mブーム + 2m + 35mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.3 8.0				
9.0	83.7 8.0				
10.0	83.1 8.0				
11.0	82.4 8.0				
12.0	81.8 8.0				
14.0	80.5 8.0				
16.0	79.2 8.0				
18.0	77.8 7.9	84.0 5.1			
20.0	76.3 7.2	82.6 4.8			
22.0	74.9 6.6	81.2 4.5			
24.0	73.4 6.0	79.7 4.3			
26.0	71.9 5.6	78.2 4.0	84.3 3.0		
28.0	70.4 5.2	76.7 3.8	83.0 2.8		
30.0	68.9 4.8	75.2 3.6	81.7 2.7		
32.0	67.3 4.5	73.5 3.4	80.3 2.5	84.1 2.0	
34.0	65.7 4.3	71.8 3.2	78.5 2.4	82.3 1.9	
36.0	64.1 4.0	70.1 3.0	76.6 2.3	80.5 1.8	84.1 1.5
38.0	62.3 3.1	68.3 2.9	74.8 2.2	78.6 1.8	82.1 1.5
40.0		66.5 2.7	72.8 2.1	76.7 1.7	79.9 1.5
42.0		64.7 2.6	70.9 2.0	74.7 1.6	77.7 1.4
44.0			68.8 1.9	72.6 1.6	75.4 1.4
46.0			66.8 1.8	70.5 1.5	73.0 1.4
48.0			64.6 1.8	68.3 1.5	70.3 1.4
50.0				66.0 1.5	67.6 1.4
52.0					64.6 1.4
危険角度 (°)	61	63	63	64	64
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1



10.85m — 35m

スーパーラフィングジブ【40mブーム時】

SJ性能 40mブーム + 2m + 10.85mSLジブ

オフセット	5°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.1	24.0								
7.0	83.2	24.0								
8.0	82.2	24.0	84.2	24.0						
9.0	81.2	24.0	83.1	24.0						
10.0	80.2	24.0	82.1	24.0	84.9	24.0				
11.0	79.2	24.0	81.1	24.0	83.8	24.0				
12.0	78.2	24.0	80.1	24.0	82.8	24.0	84.7	22.6		
14.0	76.2	24.0	78.0	24.0	80.6	24.0	82.6	22.6	83.7	20.7
16.0	74.0	21.2	75.9	22.9	78.4	24.0	80.2	21.9	81.3	20.4
18.0	71.6	15.9	73.5	17.3	75.8	19.1	77.7	20.6	78.8	20.2
20.0	69.1	11.9	71.0	13.1	73.3	14.7	75.0	15.9	76.0	16.6
22.0	66.6	8.8	68.5	9.9	70.8	11.2	72.3	12.2	73.2	12.8
24.0			65.9	7.0	68.1	8.4	69.6	9.3	70.3	9.7
26.0					65.4	5.7	66.8	6.7	67.1	7.1
危険角度 (°)	65		65		65		66		66	
標準フック	24t		24t		24t		24t		24t	
フック質量 (t)	0.88		0.88		0.88		0.88		0.88	
巻掛本数	2		2		2		2		2	

SJ性能 40mブーム + 2m + 15mSLジブ

オフセット	0°	15°		30°		45°		60°		
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	
5.0	84.3	12.0								
6.0	83.4	12.0								
7.0	82.5	12.0								
8.0	81.6	12.0								
9.0	80.6	12.0	84.6	12.0						
10.0	79.7	12.0	83.6	12.0						
11.0	78.7	12.0	82.6	12.0						
12.0	77.8	12.0	81.5	12.0						
14.0	75.9	12.0	79.5	12.0	83.0	12.0				
16.0	74.0	12.0	77.5	12.0	81.0	12.0	83.7	12.0		
18.0	72.0	12.0	75.4	12.0	78.9	12.0	81.6	12.0	83.4	12.0
20.0	69.9	12.0	73.4	12.0	76.8	12.0	79.4	12.0	81.1	12.0
22.0	67.7	9.8	71.3	11.9	74.6	12.0	77.1	12.0	78.6	12.0
24.0	65.5	7.1	69.1	9.2	72.3	10.9	74.8	12.0	76.2	12.0
26.0			66.8	6.9	69.9	8.5	72.2	9.6	73.4	10.3
28.0					67.4	6.4	69.6	7.5	70.5	8.0
30.0							66.9	5.3	67.6	5.9
危険角度 (°)	65		65		65		66		66	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SJ性能 40mブーム + 2m + 20mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)
6.0	84.2	12.0								
7.0	83.3	12.0								
8.0	82.5	12.0								
9.0	81.6	12.0								
10.0	80.8	12.0								
11.0	80.0	12.0	84.5	12.0						
12.0	79.1	12.0	83.7	12.0						
14.0	77.4	12.0	81.9	12.0						
16.0	75.7	12.0	80.2	12.0	84.4	12.0				
18.0	73.9	12.0	78.4	12.0	82.6	12.0				
20.0	72.1	12.0	76.5	12.0	80.7	12.0	84.1	11.6		
22.0	70.3	11.0	74.7	12.0	78.8	12.0	82.0	11.2	84.3	10.2
24.0	68.1	8.5	72.7	10.9	76.9	12.0	79.8	10.9	81.9	10.0
26.0	65.9	6.2	70.5	8.7	74.8	10.6	77.6	10.6	79.5	9.8
28.0			68.4	6.8	72.5	8.5	75.4	10.0	77.0	9.7
30.0			66.2	4.7	70.2	6.8	72.9	8.0	74.5	8.8
32.0					67.8	4.9	70.4	6.3	71.8	7.0
34.0							67.8	4.6	69.0	5.3
危険角度 (°)	65		65		66		66		66	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SJ性能 40mブーム + 2m + 25mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.6 12.0				
7.0	83.8 12.0				
8.0	83.1 12.0				
9.0	82.3 12.0				
10.0	81.6 12.0				
11.0	80.8 12.0				
12.0	80.1 12.0				
14.0	78.5 12.0	84.0 12.0			
16.0	76.9 12.0	82.4 12.0			
18.0	75.3 12.0	80.7 12.0			
20.0	73.7 12.0	79.0 12.0	84.1 10.7		
22.0	72.0 12.0	77.3 11.8	82.2 10.2		
24.0	70.1 9.5	75.5 11.1	80.4 9.7	84.5 8.7	
26.0	68.2 7.5	73.7 10.1	78.5 9.3	82.5 8.4	
28.0	66.1 5.4	71.8 8.2	76.5 8.9	80.5 8.2	83.0 7.3
30.0		69.8 6.5	74.6 8.5	78.4 7.9	80.6 7.2
32.0		67.7 4.8	72.4 6.9	76.3 7.7	78.3 7.1
34.0			70.2 5.5	74.0 6.8	75.8 7.1
36.0			67.8 3.9	71.6 5.5	73.2 6.2
38.0				69.0 4.0	70.5 4.9
40.0					67.6 3.2
危険角度 (°)	65	66	66	66.5	67
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SJ性能 40mブーム + 2m + 30mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)
7.0	84.5 10.0				
8.0	83.8 10.0				
9.0	83.2 10.0				
10.0	82.5 10.0				
11.0	81.8 10.0				
12.0	81.1 10.0				
14.0	79.7 10.0				
16.0	78.3 10.0	84.3 10.0			
18.0	76.8 10.0	82.8 10.0			
20.0	75.2 10.0	81.3 10.0			
22.0	73.7 10.0	79.8 10.0			
24.0	72.1 10.0	78.2 9.6	83.7 8.1		
26.0	70.3 8.3	76.6 9.0	82.0 7.7		
28.0	68.4 6.6	74.9 8.5	80.2 7.5	84.8 6.3	
30.0	66.6 4.8	73.2 7.7	78.5 7.2	82.9 6.1	
32.0		71.3 6.3	76.7 6.9	80.9 5.9	83.9 5.3
34.0		69.3 4.8	74.8 6.6	78.8 5.8	81.7 5.2
36.0			72.8 5.7	76.7 5.6	79.5 5.1
38.0			70.6 4.4	74.6 5.5	77.1 5.1
40.0			68.3 3.1	72.2 4.8	74.7 5.0
42.0				69.7 3.5	72.0 4.5
44.0					69.0 3.1
危険角度 (°)	65	67.5	67.5	68	68
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SJ性能 40mブーム + 2m + 35mSLジブ

オフセット	0°	15°	30°	45°	60°					
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)					
8.0	84.3	8.0								
9.0	83.7	8.0								
10.0	83.1	8.0								
11.0	82.4	8.0								
12.0	81.8	8.0								
14.0	80.5	8.0								
16.0	79.2	8.0								
18.0	77.8	7.9	84.0	5.1						
20.0	76.3	7.2	82.6	4.8						
22.0	74.9	6.6	81.2	4.5						
24.0	73.4	6.0	79.7	4.3						
26.0	71.9	5.6	78.2	4.0	84.3	3.0				
28.0	70.4	5.2	76.7	3.8	83.0	2.8				
30.0	68.9	4.8	75.2	3.6	81.7	2.7				
32.0			73.5	3.4	80.3	2.5	84.1	2.0		
34.0			71.8	3.2	78.5	2.4	82.3	1.9		
36.0			70.1	3.0	76.6	2.3	80.5	1.8	84.1	1.5
38.0					74.8	2.2	78.6	1.8	82.1	1.5
40.0					72.8	2.1	76.7	1.7	79.9	1.5
42.0					70.9	2.0	74.7	1.6	77.7	1.4
44.0							72.6	1.6	75.4	1.4
46.0							70.5	1.5	73.0	1.4
48.0									70.3	1.4
危険角度 (°)	67.5	69	69	69	69					
標準フック	12t	12t	12t	12t	12t					
フック質量 (t)	0.42	0.42	0.42	0.42	0.42					
巻掛本数	1	1	1	1	1					



10.85m — 35m

スーパーラフィングジブ【40mブーム時】

SK性能 40mブーム + 2m + 10.85mSLジブ

オフセット	5°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.1 24.0				
7.0	83.2 24.0				
8.0	82.2 24.0	84.2 24.0			
9.0	81.2 24.0	83.1 24.0			
10.0	80.2 24.0	82.1 24.0	84.9 24.0		
11.0	79.2 24.0	81.1 24.0	83.8 24.0		
12.0	78.2 24.0	80.1 24.0	82.8 24.0	84.7 22.6	
14.0	76.0 20.1	77.9 22.1	80.6 24.0	82.6 22.6	83.7 20.7
16.0	73.6 14.1	75.5 15.7	78.1 17.9	80.0 19.6	81.3 20.4
18.0	71.2 9.9	73.1 11.3	75.5 13.0	77.3 14.4	78.5 15.3
20.0		70.7 8.0	73.0 9.5	74.7 10.6	75.7 11.3
22.0				72.1 7.6	72.9 8.2
危険角度 (°)	70	70	71	71	71
標準フック	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
巻掛本数	2	2	2	2	2

SK性能 40mブーム + 2m + 15mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
5.0	84.3 12.0				
6.0	83.4 12.0				
7.0	82.5 12.0				
8.0	81.6 12.0				
9.0	80.6 12.0	84.6 12.0			
10.0	79.7 12.0	83.6 12.0			
11.0	78.7 12.0	82.6 12.0			
12.0	77.8 12.0	81.5 12.0			
14.0	75.9 12.0	79.5 12.0	83.0 12.0		
16.0	74.0 12.0	77.5 12.0	81.0 12.0	83.7 12.0	
18.0	71.9 10.8	75.4 12.0	78.9 12.0	81.6 12.0	83.4 12.0
20.0		73.3 10.1	76.8 12.0	79.4 12.0	81.1 12.0
22.0		71.2 7.4	74.4 9.2	77.0 10.6	78.6 11.6
24.0			72.1 6.8	74.5 8.0	76.0 8.8
26.0				72.0 5.9	73.2 6.6
危険角度 (°)	70	70	71	71	71
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SK性能 40mブーム + 2m + 20mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.2 12.0				
7.0	83.3 12.0				
8.0	82.5 12.0				
9.0	81.6 12.0				
10.0	80.8 12.0				
11.0	80.0 12.0	84.5 12.0			
12.0	79.1 12.0	83.7 12.0			
14.0	77.4 12.0	81.9 12.0			
16.0	75.7 12.0	80.2 12.0	84.4 12.0		
18.0	73.9 12.0	78.4 12.0	82.6 12.0		
20.0	71.9 8.8	76.5 11.8	80.7 12.0	84.1 11.6	
22.0		74.4 9.1	78.8 11.4	82.0 11.2	84.3 10.2
24.0		72.4 6.9	76.6 8.9	79.8 10.7	81.9 10.0
26.0			74.4 6.9	77.5 8.4	79.5 9.5
28.0				75.2 6.5	77.0 7.5
30.0					74.4 5.7
危険角度 (°)	70	71	73	73	73
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SK性能 40mブーム + 2m + 25mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.6 12.0				
7.0	83.8 12.0				
8.0	83.1 12.0				
9.0	82.3 12.0				
10.0	81.6 12.0				
11.0	80.8 12.0				
12.0	80.1 12.0				
14.0	78.5 12.0	84.0 12.0			
16.0	76.9 12.0	82.4 12.0			
18.0	75.3 12.0	80.7 12.0			
20.0	73.5 9.9	79.0 12.0	84.1 10.7		
22.0	71.7 7.3	77.2 10.5	82.2 10.2		
24.0		75.3 8.2	80.4 9.7	84.5 8.7	
26.0		73.4 6.4	78.4 8.6	82.5 8.4	
28.0			76.3 6.9	80.5 8.2	83.0 7.3
30.0			74.2 5.4	78.3 6.9	80.6 7.2
32.0				76.0 5.4	78.2 6.4
34.0				73.6 4.2	75.7 5.0
危険角度 (°)	70	71.5	73	73	73.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SK性能 40mブーム + 2m + 30mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
7.0	84.5 10.0				
8.0	83.8 10.0				
9.0	83.2 10.0				
10.0	82.5 10.0				
11.0	81.8 10.0				
12.0	81.1 10.0				
14.0	79.7 10.0				
16.0	78.3 10.0	84.3 10.0			
18.0	76.8 10.0	82.8 10.0			
20.0	75.2 10.0	81.3 10.0			
22.0	73.4 8.2	79.8 10.0			
24.0		78.1 9.4	83.7 8.1		
26.0		76.3 7.5	82.0 7.7		
28.0		74.4 5.9	80.2 7.5	84.8 6.3	
30.0			78.4 6.7	82.9 6.1	
32.0			76.4 5.4	80.9 5.9	83.9 5.3
34.0				78.8 5.8	81.7 5.2
36.0				76.5 4.6	79.5 5.1
38.0					77.0 4.5
危険角度 (°)	72	73	75	75	75
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1


SK性能 40mブーム + 2m + 35mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.3 8.0				
9.0	83.7 8.0				
10.0	83.1 8.0				
11.0	82.4 8.0				
12.0	81.8 8.0				
14.0	80.5 8.0				
16.0	79.2 8.0				
18.0	77.8 7.9	84.0 5.1			
20.0	76.3 7.2	82.6 4.8			
22.0	74.9 6.6	81.2 4.5			
24.0	73.4 6.0	79.7 4.3			
26.0		78.2 4.0			
28.0		76.7 3.8	83.0 2.8		
30.0		75.2 3.6	81.7 2.7		
32.0			80.3 2.5	84.1 2.0	
34.0			78.5 2.4	82.3 1.9	
36.0			76.6 2.3	80.5 1.8	84.1 1.5
38.0				78.6 1.8	82.1 1.5
40.0				76.7 1.7	79.9 1.5
42.0					77.7 1.4
危険角度 (°)	72	74	75	75	76
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1



スーパーラフングジブ 作業範囲図【45mブーム時】

- Ⓐ 45m ブーム + 2m + 10.85m SLジブ (オフセット 5°)
- Ⓑ 45m ブーム + 2m + 15m SLジブ (オフセット 0°)
- Ⓒ 45m ブーム + 2m + 20m SLジブ (オフセット 0°)
- Ⓓ 45m ブーム + 2m + 25m SLジブ (オフセット 0°)
- Ⓔ 45m ブーム + 2m + 30m SLジブ (オフセット 0°)
- Ⓕ 45m ブーム + 2m + 35m SLジブ (オフセット 0°)
- Ⓖ 45m ブーム + 2m + 10.85m SLジブ (オフセット 60°)
- Ⓗ 45m ブーム + 2m + 15m SLジブ (オフセット 60°)
- Ⓘ 45m ブーム + 2m + 20m SLジブ (オフセット 60°)
- Ⓙ 45m ブーム + 2m + 25m SLジブ (オフセット 60°)
- Ⓚ 45m ブーム + 2m + 30m SLジブ (オフセット 60°)
- Ⓛ 45m ブーム + 2m + 35m SLジブ (オフセット 60°)

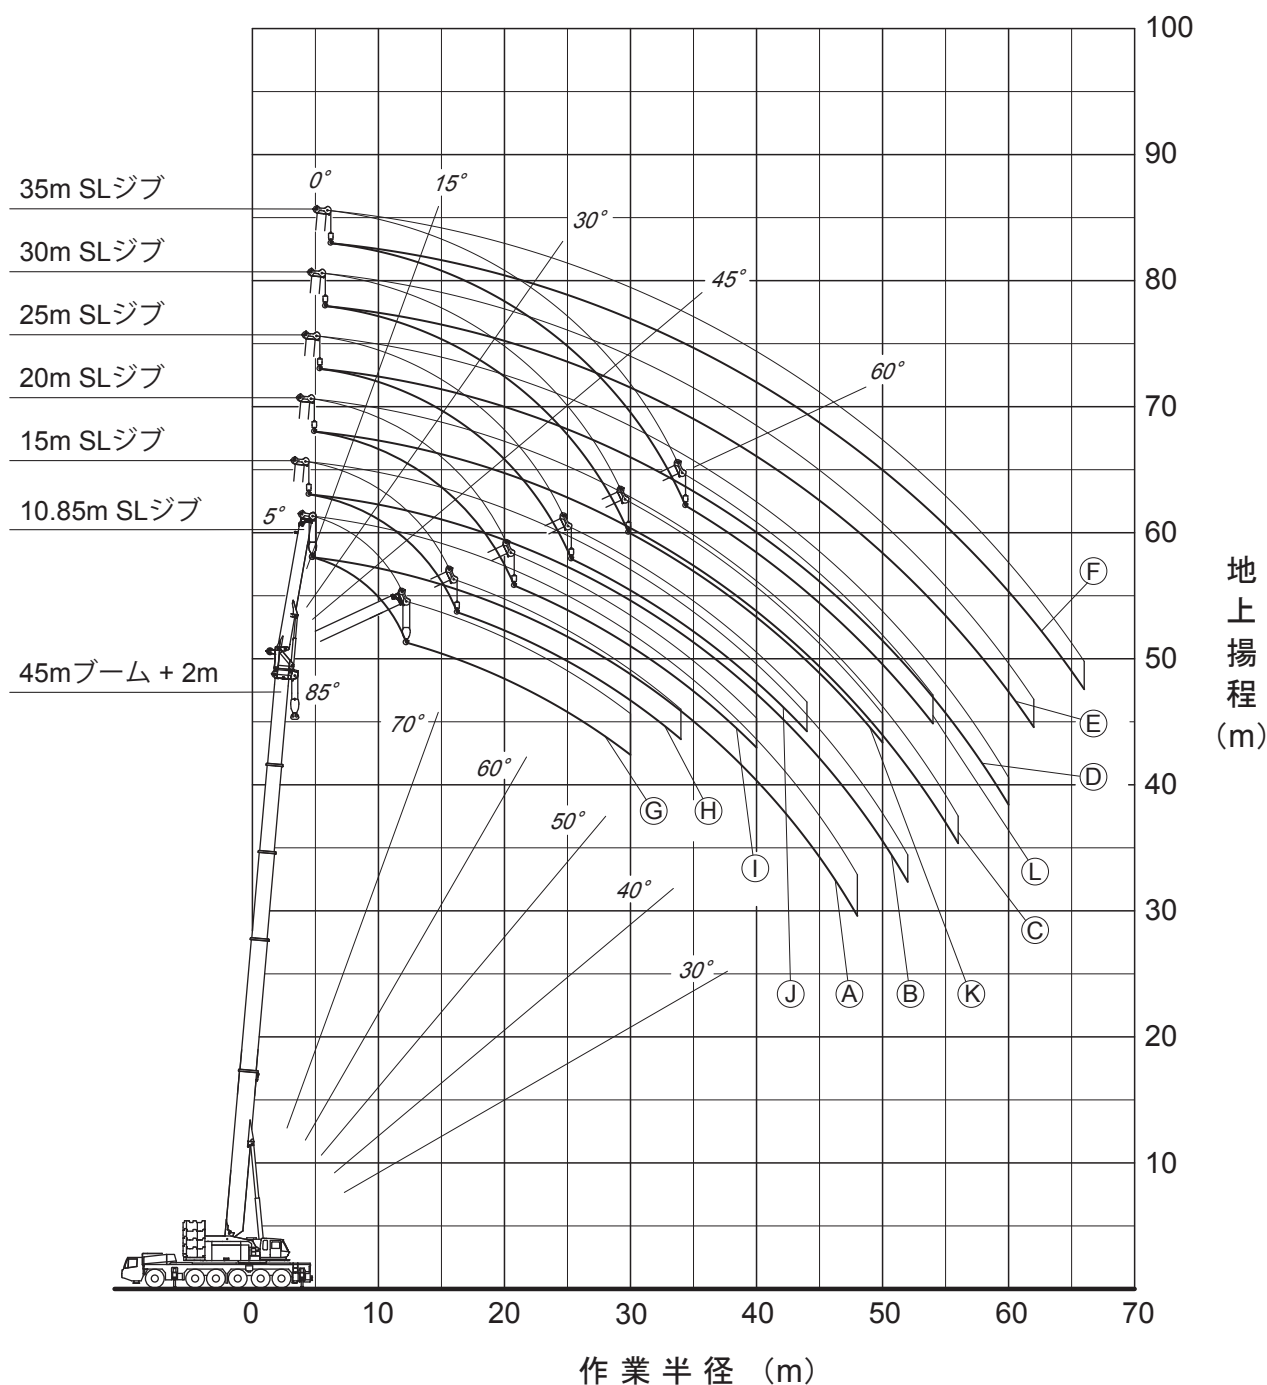

注1. 本図は、ブームおよびSLジブのたわみを含んでいません。
2. SA性能時のものを示しています。



10.85m — 35m

スーパーラフィングジブ【45mブーム時】

SA性能 45mブーム + 2m + 10.85mSLジブ

オフセット	5°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.9	24.0								
7.0	84.0	24.0								
8.0	83.2	24.0								
9.0	82.3	24.0	84.2	24.0						
10.0	81.5	24.0	83.3	24.0						
11.0	80.6	24.0	82.4	24.0	84.9	24.0				
12.0	79.7	24.0	81.5	24.0	83.9	24.0				
14.0	78.0	24.0	79.7	24.0	81.9	24.0	83.9	22.6		
16.0	76.2	24.0	78.0	24.0	80.0	24.0	81.8	21.9	83.0	20.4
18.0	74.4	24.0	76.2	24.0	77.9	22.6	79.6	20.5	80.6	19.4
20.0	72.6	24.0	74.1	23.5	75.9	21.1	77.3	19.3	78.2	18.5
22.0	70.5	22.2	72.0	21.3	73.8	19.7	75.0	18.2	75.8	17.6
24.0	68.4	19.8	69.8	19.5	71.7	18.2	72.7	17.3	73.4	16.8
26.0	66.2	17.8	67.6	17.7	69.4	16.8	70.4	16.2	71.0	16.0
28.0	63.9	16.1	65.3	16.0	67.0	15.5	68.1	15.0	68.4	14.9
30.0	61.6	14.6	62.9	14.5	64.6	14.4	65.6	14.0	65.8	14.0
32.0	59.2	13.1	60.4	13.2	62.1	13.3	63.1	13.1		
34.0	56.6	12.0	57.9	12.0	59.4	12.1	60.4	12.1		
36.0	54.0	10.8	55.3	11.0	56.7	11.0	57.5	11.0		
38.0	51.2	9.1	52.6	9.7	53.9	9.9	54.4	10.0		
40.0	48.3	7.6	49.7	8.0	50.9	8.5	51.2	8.7		
42.0	45.3	6.2	46.7	6.6	47.8	7.0				
44.0	42.0	4.9	43.4	5.2	44.2	5.6				
46.0	38.5	3.7	39.8	4.0	40.3	4.3				
48.0	34.6	2.7	35.9	2.9	36.0	3.1				
危険角度 (°)	31		32		32		48		63	
標準フック	24t		24t		24t		24t		24t	
フック質量 (t)	0.88		0.88		0.88		0.88		0.88	
巻掛本数	2		2		2		2		2	

SA性能 45mブーム + 2m + 15mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.3	12.0								
7.0	83.5	12.0								
8.0	82.6	12.0								
9.0	81.8	12.0								
10.0	81.0	12.0	84.3	12.0						
11.0	80.1	12.0	83.5	12.0						
12.0	79.3	12.0	82.6	12.0						
14.0	77.6	12.0	80.9	12.0	84.0	12.0				
16.0	75.9	12.0	79.1	12.0	82.2	12.0	84.7	12.0		
18.0	74.1	12.0	77.4	12.0	80.4	12.0	82.8	12.0	84.6	12.0
20.0	72.4	12.0	75.6	12.0	78.5	12.0	80.8	12.0	82.5	12.0
22.0	70.6	12.0	73.7	12.0	76.6	12.0	78.8	12.0	80.4	12.0
24.0	68.8	12.0	71.9	12.0	74.7	12.0	76.8	12.0	78.2	12.0
26.0	66.9	12.0	70.0	12.0	72.7	12.0	74.7	12.0	76.0	12.0
28.0	65.0	12.0	68.1	12.0	70.8	12.0	72.6	12.0	73.7	12.0
30.0	63.1	12.0	66.1	12.0	68.7	12.0	70.4	12.0	71.3	12.0
32.0	61.1	12.0	64.1	12.0	66.6	12.0	68.2	12.0	68.7	11.8
34.0	59.1	12.0	62.1	12.0	64.3	11.5	65.8	11.2	66.1	11.1
36.0	56.8	11.0	59.8	11.2	61.9	10.8	63.3	10.5		
38.0	54.4	10.0	57.4	10.2	59.5	10.1	60.7	9.9		
40.0	52.0	8.8	54.9	9.4	56.9	9.4	58.0	9.3		
42.0	49.4	7.4	52.4	8.4	54.2	8.7	55.0	8.7		
44.0	46.8	6.2	49.5	7.0	51.3	7.7	51.8	7.8		
46.0	43.8	5.0	46.5	5.8	48.2	6.3				
48.0	40.7	4.0	43.3	4.6	44.8	5.1				
50.0	37.4	3.0	39.9	3.6	41.1	3.9				
52.0	33.8	2.1	36.2	2.6	36.9	2.8				
危険角度 (°)	32		33		33		48.5		63.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SA性能 45mブーム + 2m + 20mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.8	12.0								
7.0	84.0	12.0								
8.0	83.3	12.0								
9.0	82.5	12.0								
10.0	81.8	12.0								
11.0	81.0	12.0								
12.0	80.2	12.0	84.5	12.0						
14.0	78.7	12.0	83.0	12.0						
16.0	77.2	12.0	81.4	12.0						
18.0	75.6	12.0	79.9	12.0	83.7	12.0				
20.0	74.0	12.0	78.3	12.0	82.0	12.0				
22.0	72.3	12.0	76.6	12.0	80.3	12.0	83.4	11.3		
24.0	70.7	12.0	74.9	12.0	78.6	12.0	81.5	10.9	83.5	10.0
26.0	69.0	12.0	73.2	12.0	76.7	11.9	79.5	10.7	81.4	9.9
28.0	67.3	12.0	71.5	12.0	74.9	11.2	77.6	10.4	79.3	9.7
30.0	65.5	12.0	69.8	12.0	73.0	10.8	75.6	10.2	77.1	9.6
32.0	63.7	12.0	67.8	11.2	71.1	10.4	73.5	9.9	74.9	9.5
34.0	61.9	11.4	65.9	10.6	69.1	10.1	71.4	9.5	72.5	9.1
36.0	60.0	10.7	63.8	10.2	67.1	9.7	69.1	9.1	70.0	8.9
38.0	58.1	10.1	61.8	9.7	64.9	9.2	66.8	8.6	67.4	8.5
40.0	56.2	9.4	59.7	9.1	62.7	8.6	64.5	8.3	64.7	8.2
42.0	54.1	8.4	57.5	8.5	60.3	8.1	61.9	7.9		
44.0	51.7	7.4	55.1	7.9	57.9	7.6	59.2	7.4		
46.0	49.2	6.3	52.6	7.1	55.3	7.1	56.4	7.0		
48.0	46.5	5.2	50.0	6.2	52.5	6.7	53.3	6.6		
50.0	43.8	4.3	47.2	5.2	49.6	5.8	50.1	6.1		
52.0	40.8	3.4	44.3	4.2	46.4	4.7				
54.0	37.6	2.5	41.1	3.3	42.9	3.7				
56.0	34.2	1.8	37.6	2.4	39.0	2.7				
58.0			33.8	1.6	34.7	1.8				
危険角度 (°)	32		33		33		48.5		63.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SA性能 45mブーム + 2m + 25mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
7.0	84.6	12.0								
8.0	83.9	12.0								
9.0	83.2	12.0								
10.0	82.5	12.0								
11.0	81.8	12.0								
12.0	81.2	12.0								
14.0	79.8	12.0	84.9	12.0						
16.0	78.4	12.0	83.4	12.0						
18.0	77.0	12.0	82.0	12.0						
20.0	75.5	12.0	80.5	12.0						
22.0	74.1	12.0	79.0	12.0	83.4	10.3				
24.0	72.6	12.0	77.4	11.4	81.7	9.8				
26.0	71.1	12.0	75.8	10.7	80.0	9.4	83.5	8.4		
28.0	69.5	11.8	74.1	10.1	78.3	9.0	81.7	8.2	84.2	7.2
30.0	67.9	10.9	72.5	9.6	76.5	8.7	79.8	8.0	82.2	7.2
32.0	66.2	10.2	70.8	9.1	74.8	8.3	77.9	7.8	80.2	7.1
34.0	64.5	9.5	69.0	8.7	72.9	8.0	75.9	7.6	78.1	7.1
36.0	62.8	8.9	67.2	8.3	71.1	7.8	73.9	7.4	75.9	7.0
38.0	61.0	8.3	65.4	7.9	69.2	7.5	71.8	7.3	73.7	7.0
40.0	59.2	7.8	63.5	7.5	67.2	7.3	69.7	7.1	71.2	6.8
42.0	57.3	7.3	61.6	7.2	65.2	7.1	67.6	6.8	68.7	6.7
44.0	55.2	6.9	59.6	6.9	63.0	6.9	65.4	6.5	66.0	6.5
46.0	53.2	6.5	57.5	6.6	60.9	6.6	63.1	6.2		
48.0	51.0	6.2	55.4	6.4	58.6	6.2	60.7	6.1		
50.0	48.8	5.3	53.2	6.1	56.2	5.9	57.9	5.8		
52.0	46.5	4.4	50.8	5.5	53.8	5.5	54.9	5.5		
54.0	43.9	3.6	48.2	4.6	50.8	5.2	51.7	5.2		
56.0	41.2	2.9	45.4	3.8	47.8	4.5				
58.0	38.4	2.1	42.5	3.0	44.5	3.5				
60.0	35.3	1.5	39.3	2.2	40.8	2.7				
62.0			35.8	1.5	36.8	1.8				
危険角度 (°)	33		33		33		48.5		63.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SA性能 45mブーム + 2m + 30mSLジブ

オフセット	0°		15°		30°		45°		60°
-------	----	--	-----	--	-----	--	-----	--	-----



10.85m — 35m

スーパーラフィングジブ【45mブーム時】

SB性能 45mブーム + 2m + 10.85mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
6.0	84.9	24.0			
7.0	84.0	24.0			
8.0	83.2	24.0			
9.0	82.3	24.0	84.2	24.0	
10.0	81.5	24.0	83.3	24.0	
11.0	80.6	24.0	82.4	24.0	
12.0	79.7	24.0	81.5	24.0	
14.0	78.0	24.0	79.7	24.0	
16.0	76.2	24.0	78.0	24.0	
18.0	74.4	24.0	76.2	24.0	
20.0	72.6	24.0	74.1	23.5	
22.0	70.5	22.2	72.0	21.3	
24.0	68.4	19.8	69.8	19.5	
26.0	66.2	17.8	67.6	17.7	
28.0	63.9	16.1	65.3	16.0	
30.0	61.6	14.6	62.9	14.5	
32.0	59.2	13.1	60.4	13.2	
34.0	56.5	11.0	57.9	11.7	
36.0	53.8	9.2	55.2	9.8	
38.0	51.0	7.5	52.4	8.0	
40.0	48.2	6.1	49.6	6.5	
42.0	45.1	4.7	46.6	5.1	
44.0	41.8	3.5	43.2	3.9	
46.0			39.7	2.7	
危険角度 (°)	39	39	39	48	63
標準フック	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
巻掛本数	2	2	2	2	2

SB性能 45mブーム + 2m + 15mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
6.0	84.3	12.0			
7.0	83.5	12.0			
8.0	82.6	12.0			
9.0	81.8	12.0			
10.0	81.0	12.0	84.3	12.0	
11.0	80.1	12.0	83.5	12.0	
12.0	79.3	12.0	82.6	12.0	
14.0	77.6	12.0	80.9	12.0	
16.0	75.9	12.0	79.1	12.0	
18.0	74.1	12.0	77.4	12.0	
20.0	72.4	12.0	75.6	12.0	
22.0	70.6	12.0	73.7	12.0	
24.0	68.8	12.0	71.9	12.0	
26.0	66.9	12.0	70.0	12.0	
28.0	65.0	12.0	68.1	12.0	
30.0	63.1	12.0	66.1	12.0	
32.0	61.1	12.0	64.1	12.0	
34.0	59.1	12.0	62.1	12.0	
36.0	56.7	10.4	59.8	11.2	
38.0	54.2	8.7	57.3	9.9	
40.0	51.8	7.3	54.8	8.4	
42.0	49.2	6.0	52.1	6.9	
44.0	46.5	4.8	49.3	5.6	
46.0	43.6	3.7	46.3	4.5	
48.0	40.4	2.7	43.1	3.4	
50.0			39.7	2.4	
危険角度 (°)	39	39	39	48.5	63.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SB性能 45mブーム + 2m + 20mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
6.0	84.8	12.0			
7.0	84.0	12.0			
8.0	83.3	12.0			
9.0	82.5	12.0			
10.0	81.8	12.0			
11.0	81.0	12.0			
12.0	80.2	12.0	84.5	12.0	
14.0	78.7	12.0	83.0	12.0	
16.0	77.2	12.0	81.4	12.0	
18.0	75.6	12.0	79.9	12.0	
20.0	74.0	12.0	78.3	12.0	
22.0	72.3	12.0	76.6	12.0	
24.0	70.7	12.0	74.9	12.0	
26.0	69.0	12.0	73.2	12.0	
28.0	67.3	12.0	71.5	12.0	
30.0	65.5	12.0	69.8	12.0	
32.0	63.7	12.0	67.8	11.2	
34.0	61.9	11.4	65.9	10.6	
36.0	60.0	10.7	63.8	10.2	
38.0	58.1	10.0	61.8	9.7	
40.0	56.0	8.6	59.7	9.1	
42.0	53.9	7.2	57.5	8.5	
44.0	51.4	6.0	55.0	7.3	
46.0	48.9	5.0	52.4	6.1	
48.0	46.3	4.0	49.8	5.0	
50.0	43.5	3.0	47.0	4.0	
52.0	40.6	2.2	44.1	3.0	
54.0			40.9	2.1	
危険角度 (°)	39	39	39	48.5	63.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SB性能 45mブーム + 2m + 25mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
7.0	84.6	12.0			
8.0	83.9	12.0			
9.0	83.2	12.0			
10.0	82.5	12.0			
11.0	81.8	12.0			
12.0	81.2	12.0			
14.0	79.8	12.0	84.9	12.0	
16.0	78.4	12.0	83.4	12.0	
18.0	77.0	12.0	82.0	12.0	
20.0	75.5	12.0	80.5	12.0	
22.0	74.1	12.0	79.0	12.0	
24.0	72.6	12.0	77.4	11.4	
26.0	71.1	12.0	75.8	10.7	
28.0	69.5	11.8	74.1	10.1	
30.0	67.9	10.9	72.5	9.6	
32.0	66.2	10.2	70.8	9.1	
34.0	64.5	9.5	69.0	8.7	
36.0	62.8	8.9	67.2	8.3	
38.0	61.0	8.3	65.4	7.9	
40.0	59.2	7.8	63.5	7.5	
42.0	57.3	7.3	61.6	7.2	
44.0	55.2	6.9	59.6	6.9	
46.0	53.0	6.0	57.5	6.6	
48.0	50.7	5.0	55.4	6.4	
50.0	48.5	4.1	53.0	5.4	
52.0	46.1	3.3	50.5	4.4	
54.0	43.6	2.5	47.9	3.5	
56.0	40.9	1.8	45.1	2.7	
58.0			42.1	1.9	
60.0			40.6	1.6	
危険角度 (°)	39	39	39	48.5	63.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SB性能 45mブーム + 2m + 30mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
8.0	84.4	9.5			
9.0	83.8	9.5			
10.0	83.2	9.5			
11.0	82.5	9.5			
12.0	81.9	9.5			
14.0	80.7	9.5			
16.0	79.4	9.5			
18.0	78.1	9.5	83.8	9.5	
20.0	76.8	9.5	82.4	9.5	
22.0	75.4	9.5	81.1	9.5	
24.0	74.1	9.5	79.7	9.5	
26.0	72.7	9.5	78.2	9.2	
28.0	71.3	9.5	76.7	8.7	
30.0	69.9	9.5	75.1	8.2	
32.0	68.4	8.8	73.5	7.7	
34.0	66.8	8.2	71.9	7.4	
36.0	65.1	7.6	70.3	7.0	
38.0	63.5	7.1	68.7	6.7	
40.0	61.8	6.7	67.0	6.4	
42.0	60.1	6.3	65.2	6.2	
44.0	58.3	6.0	63.5	5.9	
46.0	56.5	5.7	61.6	5.6	
48.0	54.6	5.4	59.8	5.3	
50.0	52.6	5.1	57.8	5.0	
52.0	50.3	4.2	55.8	4.8	
54.0	48.0	3.4	53.8	4.6	
56.0	45.7	2.7	51.2	3.9	
58.0	43.3	2.0	48.6	3.1	
60.0	40.8	1.4	46.0	2.4	
62.0			43.2	1.7	
64.0			42.6	1.6	
危険角度 (°)	39	41	41	48.5	63.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SB性能 45mブーム + 2m + 35mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
8.0	84.9	8.0			
9.0	84.3	8.0			
10.0	83.7	8.0			
11.0	83.1	8.0			
12.0	82.5	8.0			
14.0	81.4	8.0			
16.0	80.2	8.0			
18.0	79.0	8.0			
20.0	77.7	7.5	83.7	4.9	
22.0	76.4	6.8	82.3	4.6	
24.0	75.0	6.3	80.9	4.3	
26.0	73.7	5.8	79.5	4.1	
28.0	72.3	5.4	78.1	3.9	
30.0	70.9	5.1	76.7	3.7	
32.0	69.5	4.8	75.2	3.5	
34.0	68.1	4.5	73.8	3.3	
36.0	66.6	4.2	72.3	3.1	
38.0	65.1	4.0	70.8	3.0	
40.0	63.6	3.8	69.3	2.8	
42.0	62.0	3.6	67.8	2.7	
44.0	60.5	3.4	66.2	2.5	
46.0	58.8	3.2	64.5	2.4	
48.0	57.2	3.0	62.7	2.3	
50.0	55.5	2.8	60.9	2.2	
52.0	53.7	2.7	59.1	2.1	
54.0	51.9	2.5	57.2	2.0	
56.0	50.0	2.4	55.2	1.9	
58.0	48.1	2.3	53.2	1.8	
60.0	46.0	2.2	51.2	1.8	
62.0	43.7	1.6	49.0	1.7	
64.0			46.7	1.6	
66.0			44.3	1.5	
68.0			44.2	1.4	
危険角度 (°)	42	42	42	48.5	63.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1



10.85m — 35m

スーパーラフィングジブ【45mブーム時】

SC性能 45mブーム + 2m + 10.85mSLジブ

オフセット	5°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.9	24.0								
7.0	84.0	24.0								
8.0	83.2	24.0								
9.0	82.3	24.0	84.2	24.0						
10.0	81.5	24.0	83.3	24.0						
11.0	80.6	24.0	82.4	24.0	84.9	24.0				
12.0	79.7	24.0	81.5	24.0	83.9	24.0				
14.0	78.0	24.0	79.7	24.0	81.9	24.0	83.9	22.6		
16.0	76.2	24.0	78.0	24.0	80.0	24.0	81.8	21.9	83.0	20.4
18.0	74.4	24.0	76.2	24.0	77.9	22.6	79.6	20.5	80.6	19.4
20.0	72.6	24.0	74.1	23.5	75.9	21.1	77.3	19.3	78.2	18.5
22.0	70.5	22.2	72.0	21.3	73.8	19.7	75.0	18.2	75.8	17.6
24.0	68.4	19.8	69.8	19.5	71.7	18.2	72.7	17.3	73.4	16.8
26.0	66.2	17.8	67.6	17.7	69.4	16.8	70.4	16.2	71.0	16.0
28.0	63.9	16.0	65.3	16.0	67.0	15.5	68.1	15.0	68.4	14.9
30.0	61.4	13.4	62.8	14.2	64.6	14.4	65.6	14.0	65.8	14.0
32.0	59.0	11.2	60.3	11.9	62.0	12.8	63.1	13.1		
34.0	56.3	9.2	57.7	9.9	59.3	10.6	60.3	11.1		
36.0	53.6	7.5	55.0	8.1	56.5	8.7	57.3	9.1		
38.0	50.9	5.9	52.3	6.4	53.6	7.0	54.2	7.3		
40.0	48.0	4.5	49.4	5.0	50.6	5.5	50.9	5.7		
42.0	45.0	3.3	46.4	3.7	47.4	4.1				
44.0					43.8	2.8				
危険角度 (°)	42		43.5		43.5		48		63	
標準フック	24t		24t		24t		24t		24t	
フック質量 (t)	0.88		0.88		0.88		0.88		0.88	
巻掛本数	2		2		2		2		2	

SC性能 45mブーム + 2m + 15mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.3	12.0								
7.0	83.5	12.0								
8.0	82.6	12.0								
9.0	81.8	12.0								
10.0	81.0	12.0	84.3	12.0						
11.0	80.1	12.0	83.5	12.0						
12.0	79.3	12.0	82.6	12.0						
14.0	77.6	12.0	80.9	12.0	84.0	12.0				
16.0	75.9	12.0	79.1	12.0	82.2	12.0	84.7	12.0		
18.0	74.1	12.0	77.4	12.0	80.4	12.0	82.8	12.0	84.6	12.0
20.0	72.4	12.0	75.6	12.0	78.5	12.0	80.8	12.0	82.5	12.0
22.0	70.6	12.0	73.7	12.0	76.6	12.0	78.8	12.0	80.4	12.0
24.0	68.8	12.0	71.9	12.0	74.7	12.0	76.8	12.0	78.2	12.0
26.0	66.9	12.0	70.0	12.0	72.7	12.0	74.7	12.0	76.0	12.0
28.0	65.0	12.0	68.1	12.0	70.8	12.0	72.6	12.0	73.7	12.0
30.0	63.1	12.0	66.1	12.0	68.7	12.0	70.4	12.0	71.3	12.0
32.0	61.1	12.0	64.1	12.0	66.6	12.0	68.2	12.0	68.7	11.8
34.0	58.9	10.4	62.0	11.8	64.3	11.5	65.8	11.2	66.1	11.1
36.0	56.5	8.7	59.6	10.0	61.9	10.8	63.3	10.5		
38.0	54.0	7.1	57.1	8.3	59.4	9.3	60.7	9.9		
40.0	51.5	5.8	54.6	6.8	56.7	7.7	57.9	8.2		
42.0	49.0	4.5	51.9	5.5	53.9	6.2	54.7	6.6		
44.0	46.2	3.4	49.1	4.3	50.9	4.9	51.5	5.2		
46.0	43.3	2.4	46.1	3.1	47.8	3.7				
48.0					44.4	2.5				
危険角度 (°)	42		44		44		48.5		63.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SC性能 45mブーム + 2m + 20mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.8	12.0								
7.0	84.0	12.0								
8.0	83.3	12.0								
9.0	82.5	12.0								
10.0	81.8	12.0								
11.0	81.0	12.0								
12.0	80.2	12.0	84.5	12.0						
14.0	78.7	12.0	83.0	12.0						
16.0	77.2	12.0	81.4	12.0						
18.0	75.6	12.0	79.9	12.0	83.7	12.0				
20.0	74.0	12.0	78.3	12.0	82.0	12.0				
22.0	72.3	12.0	76.6	12.0	80.3	12.0	83.4	11.3		
24.0	70.7	12.0	74.9	12.0	78.6	12.0	81.5	10.9	83.5	10.0
26.0	69.0	12.0	73.2	12.0	76.7	11.9	79.5	10.7	81.4	9.9
28.0	67.3	12.0	71.5	12.0	74.9	11.2	77.6	10.4	79.3	9.7
30.0	65.5	12.0	69.8	12.0	73.0	10.8	75.6	10.2	77.1	9.6
32.0	63.7	12.0	67.8	11.2	71.1	10.4	73.5	9.9	74.9	9.5
34.0	61.9	11.4	65.9	10.6	69.1	10.1	71.4	9.5	72.5	9.1
36.0	59.9	10.0	63.8	10.2	67.1	9.7	69.1	9.1	70.0	8.9
38.0	57.8	8.4	61.8	9.7	64.9	9.2	66.8	8.6	67.4	8.5
40.0	55.7	7.0	59.6	8.5	62.7	8.6	64.5	8.3	64.7	8.2
42.0	53.5	5.8	57.3	7.2	60.3	8.1	61.9	7.9		
44.0	51.1	4.7	54.8	5.9	57.8	6.9	59.2	7.4		
46.0	48.6	3.6	52.3	4.8	55.1	5.6	56.3	6.2		
48.0	46.0	2.7	49.6	3.7	52.2	4.5	53.1	4.9		
50.0	43.3	1.8	46.9	2.7	49.2	3.4	49.8	3.7		
52.0					46.0	2.4				
危険角度 (°)	42		44		44		48.5		63.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SC性能 45mブーム + 2m + 25mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
7.0	84.6	12.0								
8.0	83.9	12.0								
9.0	83.2	12.0								
10.0	82.5	12.0								
11.0	81.8	12.0								
12.0	81.2	12.0								
14.0	79.8	12.0	84.9	12.0						
16.0	78.4	12.0	83.4	12.0						
18.0	77.0	12.0	82.0	12.0						
20.0	75.5	12.0	80.5	12.0						
22.0	74.1	12.0	79.0	12.0	83.4	10.3				
24.0	72.6	12.0	77.4	11.4	81.7	9.8				
26.0	71.1	12.0	75.8	10.7	80.0	9.4	83.5	8.4		
28.0	69.5	11.8	74.1	10.1	78.3	9.0	81.7	8.2	84.2	7.2
30.0	67.9	10.9	72.5	9.6	76.5	8.7	79.8	8.0	82.2	7.2
32.0	66.2	10.2	70.8	9.1	74.8	8.3	77.9	7.8	80.2	7.1
34.0	64.5	9.5	69.0	8.7	72.9	8.0	75.9	7.6	78.1	7.1
36.0	62.8	8.9	67.2	8.3	71.1	7.8	73.9	7.4	75.9	7.0
38.0	61.0	8.3	65.4	7.9	69.2	7.5	71.8	7.3	73.7	7.0
40.0	59.2	7.8	63.5	7.5	67.2	7.3	69.7	7.1	71.2	6.8
42.0	57.2	6.9	61.6	7.2	65.2	7.1	67.6	6.8	68.7	6.7
44.0	55.0	5.8	59.6	6.9	63.0	6.9	65.4	6.5	66.0	6.5
46.0	52.8	4.7	57.4	6.2	60.9	6.6	63.1	6.2		
48.0	50.5	3.8	55.1	5.1	58.6	6.2	60.7	6.1		
50.0	48.2	2.9	52.7	4.1	56.1	5.1	57.9	5.8		
52.0	45.8	2.1	50.2	3.2	53.4	4.1	54.7	4.6		
54.0	43.2	1.4	47.6	2.4	50.4	3.2	51.4	3.6		
56.0			44.8	1.6	47.3	2.3				
危険角度 (°)	42		44		44.5		48.5		63.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SC性能 45mブーム + 2m + 30mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
8.0	84.4	9.5								
9.0	83.8	9.5								
10.0	83.2	9.5								
11.0	82.5	9.5								
12.0	81.9	9.5								
14.0	80.7	9.5								
16.0	79.4	9.5								
18.0	78.1	9.5	83.8	9.5						
20.0	76.8	9.5	82.4	9.5						
22.0	75.4	9.5	81.1	9.5						
24.0	74.1	9.5	79.7	9.5	84.1	8.1				
26.0	72.7	9.5	78.2	9.2	82.6	7.8				
28.0	71.3	9.5	76.7	8.7	81.1	7.5				
30.0	69.9	9.5	75.1	8.2	79.6	7.2	83.7	6.1		
32.0	68.4	8.8	73.5	7.7	78.1	7.0	82.0	5.9		
34.0	66.8	8.2	71.9	7.4	76.5	6.7	80.2	5.8	83.2	5.2
36.0	65.1	7.6	70.3	7.0	74.9	6.4	78.4	5.7	81.1	5.1
38.0	63.5	7.1	68.7	6.7	73.2	6.2	76.6	5.5	79.0	5.0
40.0	61.8	6.7	67.0	6.4	71.5	6.0	74.7	5.4	76.9	5.0
42.0	60.1	6.3	65.2	6.2	69.7	5.8	72.7	5.3	74.7	5.0
44.0	58.3	6.0	63.5	5.9	67.8	5.6	70.7	5.2	72.3	5.0
46.0	56.5	5.7	61.6	5.6	65.9	5.4	68.6	5.2	69.9	5.0
48.0	54.4	4.7	59.8	5.3	64.0	5.3	66.4	5.1	67.3	5.0
50.0	52.2	3.9	57.8	5.0	61.9	5.1	64.1	5.0	64.6	5.0
52.0	50.0	3.1	55.7	4.5	59.8	5.0	61.6	4.8		
54.0	47.7	2.3	53.4	3.6	57.5	4.7	59.0	4.7		
56.0	45.4	1.6	50.9	2.8	54.9	3.8	56.2	4.4		
58.0			48.4	2.1	52.0	2.9	53.2	3.4		
60.0			45.7	1.4	49.0	2.1	49.9	2.5		
62.0						1.4				
危険角度 (°)	44		44		44.5		48.5		63.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	



10.85m — 35m

スーパーラフィングジブ【45mブーム時】

SD性能 45mブーム + 2m + 10.85mSLジブ

オフセット	5°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.9	24.0								
7.0	84.0	24.0								
8.0	83.2	24.0								
9.0	82.3	24.0	84.2	24.0						
10.0	81.5	24.0	83.3	24.0						
11.0	80.6	24.0	82.4	24.0	84.9	24.0				
12.0	79.7	24.0	81.5	24.0	83.9	24.0				
14.0	78.0	24.0	79.7	24.0	81.9	24.0				
16.0	76.2	24.0	78.0	24.0	80.0	24.0	81.8	21.9	83.0	20.4
18.0	74.4	24.0	76.2	24.0	77.9	22.6	79.6	20.5	80.6	19.4
20.0	72.6	24.0	74.1	23.5	75.9	21.1	77.3	19.3	78.2	18.5
22.0	70.5	22.2	72.0	21.3	73.8	19.7	75.0	18.2	75.8	17.6
24.0	68.4	19.8	69.8	19.5	71.7	18.2	72.7	17.3	73.4	16.8
26.0	66.0	16.5	67.6	17.6	69.4	16.8	70.4	16.2	71.0	16.0
28.0	63.6	13.8	65.2	14.7	67.0	15.5	68.1	15.0	68.4	14.9
30.0	61.2	11.4	62.6	12.2	64.4	13.2	65.6	13.8	65.8	14.0
32.0	58.8	9.3	60.1	10.0	61.8	10.9	63.0	11.4		
34.0	56.2	7.4	57.5	8.1	59.1	8.8	60.1	9.3		
36.0	53.5	5.8	54.9	6.4	56.4	7.0	57.2	7.4		
38.0	50.7	4.3	52.1	4.8	53.5	5.4	54.1	5.7		
40.0	47.8	3.0	49.2	3.5	50.4	4.0	50.8	4.1		
危険角度 (°)	45		47		48		48		63	
標準フック	24t		24t		24t		24t		24t	
フック質量 (t)	0.88		0.88		0.88		0.88		0.88	
巻掛本数	2		2		2		2		2	

SD性能 45mブーム + 2m + 15mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.3	12.0								
7.0	83.5	12.0								
8.0	82.6	12.0								
9.0	81.8	12.0								
10.0	81.0	12.0	84.3	12.0						
11.0	80.1	12.0	83.5	12.0						
12.0	79.3	12.0	82.6	12.0						
14.0	77.6	12.0	80.9	12.0	84.0	12.0				
16.0	75.9	12.0	79.1	12.0	82.2	12.0	84.7	12.0		
18.0	74.1	12.0	77.4	12.0	80.4	12.0	82.8	12.0	84.6	12.0
20.0	72.4	12.0	75.6	12.0	78.5	12.0	80.8	12.0	82.5	12.0
22.0	70.6	12.0	73.7	12.0	76.6	12.0	78.8	12.0	80.4	12.0
24.0	68.8	12.0	71.9	12.0	74.7	12.0	76.8	12.0	78.2	12.0
26.0	66.9	12.0	70.0	12.0	72.7	12.0	74.7	12.0	76.0	12.0
28.0	65.0	12.0	68.1	12.0	70.8	12.0	72.6	12.0	73.7	12.0
30.0	63.1	12.0	66.1	12.0	68.7	12.0	70.4	12.0	71.3	12.0
32.0	60.9	10.4	64.1	12.0	66.6	12.0	68.2	12.0	68.7	11.8
34.0	58.6	8.6	61.8	10.0	64.3	11.2	65.8	11.2	66.1	11.1
36.0	56.2	7.0	59.4	8.3	61.8	9.4	63.2	10.1		
38.0	53.8	5.5	56.9	6.7	59.2	7.7	60.5	8.3		
40.0	51.3	4.2	54.4	5.3	56.5	6.1	57.6	6.6		
42.0	48.7	3.1	51.7	4.0	53.7	4.8	54.5	5.1		
44.0	46.0	2.0	48.9	2.9	50.8	3.5	51.4	3.8		
危険角度 (°)	45		47		48		48.5		63.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SD性能 45mブーム + 2m + 20mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.8	12.0								
7.0	84.0	12.0								
8.0	83.3	12.0								
9.0	82.5	12.0								
10.0	81.8	12.0								
11.0	81.0	12.0								
12.0	80.2	12.0	84.5	12.0						
14.0	78.7	12.0	83.0	12.0						
16.0	77.2	12.0	81.4	12.0						
18.0	75.6	12.0	79.9	12.0	83.7	12.0				
20.0	74.0	12.0	78.3	12.0	82.0	12.0				
22.0	72.3	12.0	76.6	12.0	80.3	12.0	83.4	11.3		
24.0	70.7	12.0	74.9	12.0	78.6	12.0	81.5	10.9	83.5	10.0
26.0	69.0	12.0	73.2	12.0	76.7	11.9	79.5	10.7	81.4	9.9
28.0	67.3	12.0	71.5	12.0	74.9	11.2	77.6	10.4	79.3	9.7
30.0	65.5	12.0	69.8	12.0	73.0	10.8	75.6	10.2	77.1	9.6
32.0	63.7	11.7	67.8	11.2	71.1	10.4	73.5	9.9	74.9	9.5
34.0	61.7	9.9	65.9	10.6	69.1	10.1	71.4	9.5	72.5	9.1
36.0	59.7	8.3	63.8	10.0	67.1	9.7	69.1	9.1	70.0	8.9
38.0	57.6	6.8	61.6	8.4	64.9	9.2	66.8	8.6	67.4	8.5
40.0	55.4	5.5	59.3	7.0	62.6	8.2	64.5	8.3	64.7	8.2
42.0	53.2	4.3	57.0	5.7	60.1	6.8	61.8	7.6		
44.0	50.8	3.3	54.6	4.5	57.6	5.5	59.0	6.1		
46.0	48.3	2.3	52.1	3.4	54.9	4.3	56.1	4.8		
48.0			49.5	2.4	52.0	3.2	53.0	3.6		
50.0					49.0	2.2	49.6	2.5		
危険角度 (°)	46		47		48		48.5		63.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SD性能 45mブーム + 2m + 25mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
7.0	84.6	12.0								
8.0	83.9	12.0								
9.0	83.2	12.0								
10.0	82.5	12.0								
11.0	81.8	12.0								
12.0	81.2	12.0								
14.0	79.8	12.0	84.9	12.0						
16.0	78.4	12.0	83.4	12.0						
18.0	77.0	12.0	82.0	12.0						
20.0	75.5	12.0	80.5	12.0						
22.0	74.1	12.0	79.0	12.0	83.4	10.3				
24.0	72.6	12.0	77.4	11.4	81.7	9.8				
26.0	71.1	12.0	75.8	10.7	80.0	9.4	83.5	8.4		
28.0	69.5	11.8	74.1	10.1	78.3	9.0	81.7	8.2	84.2	7.2
30.0	67.9	10.9	72.5	9.6	76.5	8.7	79.8	8.0	82.2	7.2
32.0	66.2	10.2	70.8	9.1	74.8	8.3	77.9	7.8	80.2	7.1
34.0	64.5	9.5	69.0	8.7	72.9	8.0	75.9	7.6	78.1	7.1
36.0	62.8	8.9	67.2	8.3	71.1	7.8	73.9	7.4	75.9	7.0
38.0	60.9	7.9	65.4	7.9	69.2	7.5	71.8	7.3	73.7	7.0
40.0	59.0	6.6	63.5	7.5	67.2	7.3	69.7	7.1	71.2	6.8
42.0	56.8	5.4	61.6	7.2	65.2	7.1	67.6	6.8	68.7	6.7
44.0	54.7	4.4	59.4	6.0	63.0	6.9	65.4	6.5	66.0	6.5
46.0	52.5	3.4	57.1	4.9	60.8	6.1	63.1	6.2		
48.0	50.2	2.5	54.8	3.8	58.3	5.0	60.6	5.7		
50.0	47.9	1.7	52.4	2.9	55.8	3.9	57.6	4.6		
52.0			49.9	2.1	53.1	3.0	54.5	3.5		
54.0					50.1	2.0	51.2	2.4		
危険角度 (°)	46		47.5		48		48.5		63.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SD性能 45mブーム + 2m + 30mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
8.0	84.4	9.5								
9.0	83.8	9.5								
10.0	83.2	9.5								
11.0	82.5	9.5								
12.0	81.9	9.5								
14.0	80.7	9.5								
16.0	79.4	9.5								
18.0	78.1	9.5	83.8	9.5						
20.0	76.8	9.5	82.4	9.5						
22.0	75.4	9.5	81.1	9.5						
24.0	74.1	9.5	79.7	9.5	84.1	8.1				
26.0	72.7	9.5	78.2	9.2	82.6	7.8				
28.0	71.3	9.5	76.7	8.7	81.1	7.5				
30.0	69.9	9.5	75.1	8.2	79.6	7.2	83.7	6.1		
32.0	68.4	8.8	73.5	7.7	78.1	7.0	82.0	5.9		
34.0	66.8	8.2	71.9	7.4	76.5	6.7	80.2	5.8	83.2	5.2
36.0	65.1	7.6	70.3	7.0	74.9	6.4	78.4	5.7	81.1	5.1
38.0	63.5	7.1	68.7	6.7	73.2	6.2	76.6	5.5	79.0	5.0
40.0	61.8	6.7	67.0	6.4	71.5	6.0	74.7	5.4	76.9	5.0
42.0	60.1	6.3	65.2	6.2	69.7	5.8	72.7	5.3	74.7	5.0
44.0	58.1	5.3	63.5	5.9	67.8	5.6	70.7	5.2	72.3	5.0
46.0	56.1	4.3	61.6	5.6	65.9	5.4	68.6	5.2	69.9	5.0
48.0	54.1	3.5	59.7	5.1	64.0	5.3	66.4	5.1	67.3	5.0
50.0	51.9	2.6	57.6	4.1	61.9	5.1	64.1	5.0	64.6	5.0
52.0	49.7	1.9	55.4	3.3	59.6	4.5	61.6	4.8		
54.0			53.1	2.5	57.1	3.6	58.9	4.3		
56.0			50.6	1.7	54.5	2.7	56.0	3.3		
58.0					51.7	1.9	53.0	2.4		
60.0							49.7	1.5		
危険角度 (°)	48		49		49		49		63.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	



10.85m — 35m

スーパーラフィングジブ【45mブーム時】

SE性能 45mブーム + 2m + 10.85mSLジブ

オフセット	5°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.9	24.0								
7.0	84.0	24.0								
8.0	83.2	24.0								
9.0	82.3	24.0	84.2	24.0						
10.0	81.5	24.0	83.3	24.0						
11.0	80.6	24.0	82.4	24.0	84.9	24.0				
12.0	79.7	24.0	81.5	24.0	83.9	24.0				
14.0	78.0	24.0	79.7	24.0	81.9	24.0	83.9	22.6		
16.0	76.2	24.0	78.0	24.0	80.0	24.0	81.8	21.9	83.0	20.4
18.0	74.4	24.0	76.2	24.0	77.9	22.6	79.6	20.5	80.6	19.4
20.0	72.6	23.7	74.1	23.5	75.9	21.1	77.3	19.3	78.2	18.5
22.0	70.3	19.4	71.9	20.7	73.8	19.7	75.0	18.2	75.8	17.6
24.0	68.0	15.9	69.6	17.1	71.7	18.2	72.7	17.3	73.4	16.8
26.0	65.6	13.0	67.3	14.0	69.2	15.3	70.4	16.2	71.0	16.0
28.0	63.3	10.5	64.8	11.4	66.7	12.5	67.9	13.3	68.3	13.6
30.0	60.9	8.3	62.3	9.1	64.2	10.1	65.3	10.8	65.5	11.0
32.0	58.5	6.4	59.8	7.1	61.6	8.0	62.7	8.6		
34.0	55.9	4.7	57.3	5.4	58.9	6.1	59.8	6.6		
36.0	53.2	3.2	54.7	3.8	56.1	4.5	56.9	4.8		
38.0					53.2	3.0	53.9	3.3		
危険角度 (°)	51		52		52		52		63	
標準フック	24t		24t		24t		24t		24t	
フック質量 (t)	0.88		0.88		0.88		0.88		0.88	
巻掛本数	2		2		2		2		2	

SE性能 45mブーム + 2m + 15mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.3	12.0								
7.0	83.5	12.0								
8.0	82.6	12.0								
9.0	81.8	12.0								
10.0	81.0	12.0	84.3	12.0						
11.0	80.1	12.0	83.5	12.0						
12.0	79.3	12.0	82.6	12.0						
14.0	77.6	12.0	80.9	12.0	84.0	12.0				
16.0	75.9	12.0	79.1	12.0	82.2	12.0	84.7	12.0		
18.0	74.1	12.0	77.4	12.0	80.4	12.0	82.8	12.0	84.6	12.0
20.0	72.4	12.0	75.6	12.0	78.5	12.0	80.8	12.0	82.5	12.0
22.0	70.6	12.0	73.7	12.0	76.6	12.0	78.8	12.0	80.4	12.0
24.0	68.8	12.0	71.9	12.0	74.7	12.0	76.8	12.0	78.2	12.0
26.0	66.9	12.0	70.0	12.0	72.7	12.0	74.7	12.0	76.0	12.0
28.0	65.0	11.6	68.1	12.0	70.8	12.0	72.6	12.0	73.7	12.0
30.0	62.7	9.4	66.0	11.2	68.7	12.0	70.4	12.0	71.3	12.0
32.0	60.5	7.5	63.8	9.1	66.4	10.5	68.1	11.4	68.7	11.8
34.0	58.2	5.9	61.5	7.3	64.0	8.5	65.6	9.4	66.0	9.7
36.0	55.9	4.4	59.1	5.7	61.5	6.8	62.9	7.5		
38.0	53.5	3.1	56.6	4.3	58.9	5.2	60.1	5.8		
40.0			54.0	3.0	56.2	3.8	57.3	4.3		
42.0					53.5	2.6	54.3	2.9		
危険角度 (°)	52		52		52		52		63.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SE性能 45mブーム + 2m + 20mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.8	12.0								
7.0	84.0	12.0								
8.0	83.3	12.0								
9.0	82.5	12.0								
10.0	81.8	12.0								
11.0	81.0	12.0								
12.0	80.2	12.0	84.5	12.0						
14.0	78.7	12.0	83.0	12.0						
16.0	77.2	12.0	81.4	12.0						
18.0	75.6	12.0	79.9	12.0	83.7	12.0				
20.0	74.0	12.0	78.3	12.0	82.0	12.0				
22.0	72.3	12.0	76.6	12.0	80.3	12.0	83.4	11.3		
24.0	70.7	12.0	74.9	12.0	78.6	12.0	81.5	10.9	83.5	10.0
26.0	69.0	12.0	73.2	12.0	76.7	11.9	79.5	10.7	81.4	9.9
28.0	67.3	12.0	71.5	12.0	74.9	11.2	77.6	10.4	79.3	9.7
30.0	65.4	10.7	69.8	12.0	73.0	10.8	75.6	10.2	77.1	9.6
32.0	63.3	8.8	67.8	10.9	71.1	10.4	73.5	9.9	74.9	9.5
34.0	61.3	7.2	65.7	9.1	69.1	10.1	71.4	9.5	72.5	9.1
36.0	59.3	5.7	63.5	7.5	67.0	9.0	69.1	9.1	70.0	8.9
38.0	57.2	4.4	61.2	6.0	64.6	7.4	66.8	8.4	67.4	8.5
40.0	55.0	3.2	59.0	4.7	62.2	5.9	64.3	6.8	64.6	7.2
42.0	52.8	2.2	56.7	3.5	59.8	4.6	61.6	5.4		
44.0			54.3	2.4	57.2	3.4	58.8	4.1		
46.0					54.6	2.3	55.8	2.8		
48.0							52.7	1.7		
危険角度 (°)	52		52		52		52		63.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SE性能 45mブーム + 2m + 25mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.6	12.0								
7.0	83.9	12.0								
8.0	83.2	12.0								
9.0	82.5	12.0								
10.0	81.8	12.0								
11.0	81.2	12.0								
12.0	80.2	12.0								
14.0	79.8	12.0	84.9	12.0						
16.0	78.4	12.0	83.4	12.0						
18.0	77.0	12.0	82.0	12.0						
20.0	75.5	12.0	80.5	12.0						
22.0	74.1	12.0	79.0	12.0	83.4	10.3				
24.0	72.6	12.0	77.4	11.4	81.7	9.8				
26.0	71.1	12.0	75.8	10.7	80.0	9.4	83.5	8.4		
28.0	69.5	11.8	74.1	10.1	78.3	9.0	81.7	8.2	84.2	7.2
30.0	67.9	10.9	72.5	9.6	76.5	8.7	79.8	8.0	82.2	7.2
32.0	66.2	10.0	70.8	9.1	74.8	8.3	77.9	7.8	80.2	7.1
34.0	64.3	8.3	69.0	8.7	72.9	8.0	75.9	7.6	78.1	7.1
36.0	62.4	6.8	67.2	8.3	71.1	7.8	73.9	7.4	75.9	7.0
38.0	60.4	5.5	65.4	7.5	69.2	7.5	71.8	7.3	73.7	7.0
40.0	58.4	4.3	63.3	6.2	67.2	7.3	69.7	7.1	71.2	6.8
42.0	56.4	3.3	61.1	5.0	65.0	6.5	67.6	6.8	68.7	6.7
44.0	54.2	2.3	58.9	3.9	62.7	5.2	65.3	6.2	66.0	6.5
46.0			56.7	2.9	60.4	4.1	62.8	5.0		
48.0			54.3	1.9	57.9	3.1	60.1	3.8		
50.0					55.4	2.1	57.1	2.7		
52.0							54.1	1.7		
危険角度 (°)	52.5		53		53		53		63.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SE性能 45mブーム + 2m + 30mSLジブ

オフセット	0		15		30		45		60	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
8.0	84.4	9.5								
9.0	83.8	9.5								
10.0	83.2	9.5								
11.0	82.5	9.5								
12.0	81.9	9.5								
14.0	80.7	9.5								
16.0	79.4	9.5								
18.0	78.1	9.5	83.8	9.5						
20.0	76.8	9.5	82.4	9.5						
22.0	75.4	9.5	81.1	9.5						
24.0	74.1	9.5	79.7	9.5	84.1	8.1				
26.0	72.7	9.5	78.2	9.2	82.6	7.8				
28.0	71.3	9.5	76.7	8.7	81.1	7.5				
30.0	69.9	9.5	75.1	8.2	79.6	7.2	83.7	6.1		
32.0	68.4	8.8	73.5	7.7	78.1	7.0	82.0	5.9		
34.0	66.8	8.2	71.9	7.4	76.5	6.7	80.2	5.8	83.2	5.2
36.0	65.1	7.6	70.3	7.0	74.9	6.4	78.4	5.7	81.1	5.1
38.0	63.3	6.5	68.7	6.7	73.2	6.2	76.6	5.5	79.0	5.0
40.0	61.4	5.3	67.0	6.4	71.5	6.0	74.7	5.4	76.9	5.0
42.0	59.5	4.2	65.2	6.2	69.7	5.8	72.7	5.3	74.7	5.0
44.0	57.5	3.2	63.2	5.1	67.8	5.6	70.7	5.2	72.3	5.0
46.0	55.5	2.4	61.2	4.1	65.9	5.4	68.6	5.2	69.9	5.0
48.0	53.5	1.5	59.1	3.2	63.7	4.6	66.4	5.1	67.3	5.0
50.0			57.0	2.3	61.3	3.6	64.0	4.6	64.6	5.0
52.0			54.8	1.5	58.9	2.7	61.3	3.6		
54.0					56.5	1.9	58.5	2.6		
56.0							55.7	1.7		
危険角度 (°)	53		54		54		54		63.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	



10.85m — 35m

スーパーラフィングジブ【45mブーム時】

SF性能 45mブーム + 2m + 10.85mSLジブ

オフセット	5°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.9	24.0								
7.0	84.0	24.0								
8.0	83.2	24.0								
9.0	82.3	24.0	84.2	24.0						
10.0	81.5	24.0	83.3	24.0						
11.0	80.6	24.0	82.4	24.0	84.9	24.0				
12.0	79.7	24.0	81.5	24.0	83.9	24.0				
14.0	78.0	24.0	79.7	24.0	81.9	24.0	83.9	22.6		
16.0	76.2	24.0	78.0	24.0	80.0	24.0	81.8	21.9	83.0	20.4
18.0	74.4	24.0	76.2	24.0	77.9	22.6	79.6	20.5	80.6	19.4
20.0	72.4	20.8	74.0	22.3	75.9	21.1	77.3	19.3	78.2	18.5
22.0	70.0	16.9	71.7	18.2	73.8	19.7	75.0	18.2	75.8	17.6
24.0	67.7	13.6	69.4	14.7	71.5	16.2	72.7	17.3	73.4	16.8
26.0	65.4	10.8	67.1	11.8	69.0	13.1	70.3	14.1	70.8	14.5
28.0	63.1	8.5	64.6	9.4	66.5	10.5	67.8	11.3	68.2	11.6
30.0	60.7	6.4	62.2	7.2	64.0	8.2	65.1	8.9	65.4	9.1
32.0	58.3	4.6	59.7	5.4	61.4	6.2	62.5	6.8		
34.0	55.7	3.1	57.1	3.7	58.7	4.5	59.7	4.9		
36.0					56.0	2.9	56.8	3.3		
危険角度 (°)	54		55		55		55		63	
標準フック	24t		24t		24t		24t		24t	
フック質量 (t)	0.88		0.88		0.88		0.88		0.88	
巻掛本数	2		2		2		2		2	

SF性能 45mブーム + 2m + 15mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.3	12.0								
7.0	83.5	12.0								
8.0	82.6	12.0								
9.0	81.8	12.0								
10.0	81.0	12.0	84.3	12.0						
11.0	80.1	12.0	83.5	12.0						
12.0	79.3	12.0	82.6	12.0						
14.0	77.6	12.0	80.9	12.0	84.0	12.0				
16.0	75.9	12.0	79.1	12.0	82.2	12.0	84.7	12.0		
18.0	74.1	12.0	77.4	12.0	80.4	12.0	82.8	12.0	84.6	12.0
20.0	72.4	12.0	75.6	12.0	78.5	12.0	80.8	12.0	82.5	12.0
22.0	70.6	12.0	73.7	12.0	76.6	12.0	78.8	12.0	80.4	12.0
24.0	68.8	12.0	71.9	12.0	74.7	12.0	76.8	12.0	78.2	12.0
26.0	66.9	11.9	70.0	12.0	72.7	12.0	74.7	12.0	76.0	12.0
28.0	64.7	9.6	68.0	11.5	70.8	12.0	72.6	12.0	73.7	12.0
30.0	62.5	7.6	65.9	9.3	68.6	10.8	70.4	11.9	71.3	12.0
32.0	60.3	5.8	63.6	7.4	66.2	8.7	67.9	9.7	68.6	10.2
34.0	58.0	4.2	61.3	5.7	63.8	6.9	65.4	7.7	65.8	8.1
36.0	55.6	2.9	58.9	4.2	61.3	5.3	62.7	6.0		
38.0			56.4	2.8	58.7	3.8	59.9	4.4		
40.0					56.1	2.5	57.1	2.9		
危険角度 (°)	54		55		55		55		63.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SF性能 45mブーム + 2m + 20mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.8	12.0								
7.0	84.0	12.0								
8.0	83.3	12.0								
9.0	82.5	12.0								
10.0	81.8	12.0								
11.0	81.0	12.0								
12.0	80.2	12.0	84.5	12.0						
14.0	78.7	12.0	83.0	12.0						
16.0	77.2	12.0	81.4	12.0						
18.0	75.6	12.0	79.9	12.0	83.7	12.0				
20.0	74.0	12.0	78.3	12.0	82.0	12.0				
22.0	72.3	12.0	76.6	12.0	80.3	12.0	83.4	11.3		
24.0	70.7	12.0	74.9	12.0	78.6	12.0	81.5	10.9	83.5	10.0
26.0	69.0	12.0	73.2	12.0	76.7	11.9	79.5	10.7	81.4	9.9
28.0	67.1	10.9	71.5	12.0	74.9	11.2	77.6	10.4	79.3	9.7
30.0	65.2	8.9	69.7	11.2	73.0	10.8	75.6	10.2	77.1	9.6
32.0	63.1	7.1	67.6	9.2	71.1	10.4	73.5	9.9	74.9	9.5
34.0	61.1	5.5	65.5	7.5	69.0	9.1	71.4	9.5	72.5	9.1
36.0	59.1	4.2	63.3	5.9	66.8	7.5	69.1	8.6	70.0	8.9
38.0	56.9	2.9	61.0	4.6	64.4	5.9	66.6	6.9	67.3	7.4
40.0	54.7	1.8	58.8	3.3	62.0	4.6	64.1	5.4	64.4	5.8
42.0			56.5	2.2	59.6	3.3	61.4	4.1		
44.0					57.1	2.2	58.6	2.8		
46.0							55.7	1.6		
危険角度 (°)	54		55		55		55		63.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SF性能 45mブーム + 2m + 25mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
7.0	84.6	12.0								
8.0	83.9	12.0								
9.0	83.2	12.0								
10.0	82.5	12.0								
11.0	81.8	12.0								
12.0	81.2	12.0								
14.0	79.8	12.0	84.9	12.0						
16.0	78.4	12.0	83.4	12.0						
18.0	77.0	12.0	82.0	12.0						
20.0	75.5	12.0	80.5	12.0						
22.0	74.1	12.0	79.0	12.0	83.4	10.3				
24.0	72.6	12.0	77.4	11.4	81.7	9.8				
26.0	71.1	12.0	75.8	10.7	80.0	9.4	83.5	8.4		
28.0	69.5	11.8	74.1	10.1	78.3	9.0	81.7	8.2	84.2	7.2
30.0	67.7	10.0	72.5	9.6	76.5	8.7	79.8	8.0	82.2	7.2
32.0	65.8	8.2	70.8	9.1	74.8	8.3	77.9	7.8	80.2	7.1
34.0	64.0	6.7	69.0	8.7	72.9	8.0	75.9	7.6	78.1	7.1
36.0	62.1	5.3	67.1	7.4	71.1	7.8	73.9	7.4	75.9	7.0
38.0	60.1	4.0	65.0	6.0	69.2	7.5	71.8	7.3	73.7	7.0
40.0	58.1	2.9	63.0	4.8	67.0	6.4	69.7	7.1	71.2	6.8
42.0	56.1	1.9	60.8	3.6	64.7	5.1	67.5	6.3	68.7	6.7
44.0			58.6	2.6	62.5	4.0	65.1	5.0	65.9	5.5
46.0			56.4	1.7	60.1	2.9	62.5	3.8		
48.0					57.7	1.9	59.8	2.7		
50.0							56.9	1.6		
危険角度 (°)	55		55		56		56		63.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SF性能 45mブーム + 2m + 30mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
8.0	84.4	9.5								
9.0	83.8	9.5								
10.0	83.2	9.5								
11.0	82.5	9.5								
12.0	81.9	9.5								
14.0	80.7	9.5								
16.0	79.4	9.5								
18.0	78.1	9.5	83.8	9.5						
20.0	76.8	9.5	82.4	9.5						
22.0	75.4	9.5	81.1	9.5						
24.0	74.1	9.5	79.7	9.5	84.1	8.1				
26.0	72.7	9.5	78.2	9.2	82.6	7.8				
28.0	71.3	9.5	76.7	8.7	81.1	7.5				
30.0	69.9	9.5	75.1	8.2	79.6	7.2	83.7	6.1		
32.0	68.4	8.8	73.5	7.7	78.1	7.0	82.0	5.9		
34.0	66.6	7.6	71.9	7.4	76.5	6.7	80.2	5.8	83.2	5.2
36.0	64.8	6.2	70.3	7.0	74.9	6.4	78.4	5.7	81.1	5.1
38.0	62.9	5.0	68.7	6.7	73.2	6.2	76.6	5.5	79.0	5.0
40.0	61.0	3.9	66.9	6.1	71.5	6.0	74.7	5.4	76.9	5.0
42.0	59.1	2.9	64.9	4.9	69.7	5.8	72.7	5.3	74.7	5.0
44.0	57.2	2.0	62.9	3.9	67.8	5.6	70.7	5.2	72.3	5.0
46.0			60.8	2.9	65.6	4.5	68.6	5.2	69.9	5.0
48.0			58.8	2.0	63.3	3.5	66.3	4.6	67.3	5.0
50.0					60.9	2.5	63.7	3.5	64.5	4.0
52.0					58.6	1.7	61.0	2.5		
54.0							58.3	1.6		
危険角度 (°)	56		57		57		57		63.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	



10.85m — 35m

スーパーラフィングジブ【45mブーム時】

SG性能 45mブーム + 2m + 10.85mSLジブ

オフセット	5°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.9 24.0				
7.0	84.0 24.0				
8.0	83.2 24.0				
9.0	82.3 24.0	84.2 24.0			
10.0	81.5 24.0	83.3 24.0			
11.0	80.6 24.0	82.4 24.0	84.9 24.0		
12.0	79.7 24.0	81.5 24.0	83.9 24.0		
14.0	78.0 24.0	79.7 24.0	81.9 24.0	83.9 22.6	
16.0	76.2 24.0	78.0 24.0	80.0 24.0	81.8 21.9	83.0 20.4
18.0	74.3 22.6	76.2 24.0	77.9 22.6	79.6 20.5	80.6 19.4
20.0	72.1 18.0	73.8 19.5	75.9 21.1	77.3 19.3	78.2 18.5
22.0	69.8 14.3	71.5 15.6	73.6 17.3	75.0 18.2	75.8 17.6
24.0	67.5 11.3	69.2 12.4	71.3 13.8	72.6 14.9	73.3 15.5
26.0	65.2 8.7	66.9 9.7	68.6 11.0	70.1 11.9	70.7 12.4
28.0	62.9 6.5	64.4 7.4	66.3 8.5	67.6 9.3	68.0 9.6
30.0	60.5 4.5	62.0 5.4	63.8 6.4	65.0 7.0	65.2 7.3
32.0	58.1 2.9	59.5 3.6	61.2 4.5	62.3 5.1	
34.0			58.6 2.8	59.5 3.3	
危険角度 (°)	56	58	58	58	63
標準フック	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
巻掛本数	2	2	2	2	2

SG性能 45mブーム + 2m + 15mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.3 12.0				
7.0	83.5 12.0				
8.0	82.6 12.0				
9.0	81.8 12.0				
10.0	81.0 12.0	84.3 12.0			
11.0	80.1 12.0	83.5 12.0			
12.0	79.3 12.0	82.6 12.0			
14.0	77.6 12.0	80.9 12.0	84.0 12.0		
16.0	75.9 12.0	79.1 12.0	82.2 12.0	84.7 12.0	
18.0	74.1 12.0	77.4 12.0	80.4 12.0	82.8 12.0	84.6 12.0
20.0	72.4 12.0	75.6 12.0	78.5 12.0	80.8 12.0	82.5 12.0
22.0	70.6 12.0	73.7 12.0	76.6 12.0	78.8 12.0	80.4 12.0
24.0	68.8 12.0	71.9 12.0	74.7 12.0	76.8 12.0	78.2 12.0
26.0	66.7 9.8	70.0 11.9	72.7 12.0	74.7 12.0	76.0 12.0
28.0	64.5 7.6	67.9 9.5	70.7 11.2	72.6 12.0	73.7 12.0
30.0	62.3 5.7	65.7 7.4	68.4 8.9	70.2 10.1	71.2 10.7
32.0	60.0 4.1	63.4 5.6	66.1 7.0	67.7 7.9	68.4 8.4
34.0	57.7 2.6	61.1 4.0	63.6 5.2	65.2 6.1	65.7 6.4
36.0		58.7 2.6	61.1 3.7	62.5 4.4	
38.0			58.6 2.3	59.7 2.9	
危険角度 (°)	56	58	58	58	63.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SG性能 45mブーム + 2m + 20mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.8 12.0				
7.0	84.0 12.0				
8.0	83.3 12.0				
9.0	82.5 12.0				
10.0	81.8 12.0				
11.0	81.0 12.0				
12.0	80.2 12.0	84.5 12.0			
14.0	78.7 12.0	83.0 12.0			
16.0	77.2 12.0	81.4 12.0			
18.0	75.6 12.0	79.9 12.0	83.7 12.0		
20.0	74.0 12.0	78.3 12.0	82.0 12.0		
22.0	72.3 12.0	76.6 12.0	80.3 12.0	83.4 11.3	
24.0	70.7 12.0	74.9 12.0	78.6 12.0	81.5 10.9	83.5 10.0
26.0	68.9 11.1	73.2 12.0	76.7 11.9	79.5 10.7	81.4 9.9
28.0	66.9 8.9	71.5 11.4	74.9 11.2	77.6 10.4	79.3 9.7
30.0	64.9 7.0	69.5 9.3	73.0 10.8	75.6 10.2	77.1 9.6
32.0	62.9 5.4	67.4 7.5	71.0 9.3	73.5 9.9	74.9 9.5
34.0	60.9 3.9	65.3 5.8	68.8 7.5	71.3 8.8	72.5 9.1
36.0	58.8 2.6	63.1 4.4	66.5 5.9	68.9 7.1	69.9 7.7
38.0		60.8 3.1	64.2 4.5	66.4 5.5	67.1 6.0
40.0		58.6 1.9	61.8 3.2	63.9 4.0	64.2 4.4
42.0			59.4 2.0	61.2 2.7	
44.0				58.4 1.5	
危険角度 (°)	57	58	58	58	63.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SG性能 45mブーム + 2m + 25mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
7.0	84.6 12.0				
8.0	83.9 12.0				
9.0	83.2 12.0				
10.0	82.5 12.0				
11.0	81.8 12.0				
12.0	81.2 12.0				
14.0	79.8 12.0	84.9 12.0			
16.0	78.4 12.0	83.4 12.0			
18.0	77.0 12.0	82.0 12.0			
20.0	75.5 12.0	80.5 12.0			
22.0	74.1 12.0	79.0 12.0	83.4 10.3		
24.0	72.6 12.0	77.4 11.4	81.7 9.8		
26.0	71.1 12.0	75.8 10.7	80.0 9.4	83.5 8.4	
28.0	69.2 10.0	74.1 10.1	78.3 9.0	81.7 8.2	84.2 7.2
30.0	67.4 8.1	72.5 9.6	76.5 8.7	79.8 8.0	82.2 7.2
32.0	65.5 6.5	70.7 9.0	74.8 8.3	77.9 7.8	80.2 7.1
34.0	63.6 5.0	68.8 7.4	72.9 8.0	75.9 7.6	78.1 7.1
36.0	61.7 3.7	66.8 5.9	71.1 7.8	73.9 7.4	75.9 7.0
38.0	59.8 2.6	64.7 4.6	69.0 6.4	71.8 7.3	73.7 7.0
40.0	57.8 1.5	62.6 3.4	66.7 5.0	69.6 6.3	71.2 6.8
42.0		60.5 2.3	64.5 3.8	67.3 5.0	68.5 5.6
44.0		58.3 1.3	62.2 2.7	64.8 3.7	65.7 4.2
46.0			59.9 1.7	62.3 2.6	
48.0				59.5 1.5	
危険角度 (°)	57	58	58	58	63.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SG性能 45mブーム + 2m + 30mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.4 9.5				
9.0	83.8 9.5				
10.0	83.2 9.5				
11.0	82.5 9.5				
12.0	81.9 9.5				
14.0	80.7 9.5				
16.0	79.4 9.5				
18.0	78.1 9.5	83.8 9.5			
20.0	76.8 9.5	82.4 9.5			
22.0	75.4 9.5	81.1 9.5			
24.0	74.1 9.5	79.7 9.5	84.1 8.1		
26.0	72.7 9.5	78.2 9.2	82.6 7.8		
28.0	71.3 9.5	76.7 8.7	81.1 7.5		
30.0	69.8 9.1	75.1 8.2	79.6 7.2	83.7 6.1	
32.0	68.0 7.4	73.5 7.7	78.1 7.0	82.0 5.9	
34.0	66.2 6.0	71.9 7.4	76.5 6.7	80.2 5.8	83.2 5.2
36.0	64.4 4.7	70.3 7.0	74.9 6.4	78.4 5.7	81.1 5.1
38.0	62.5 3.5	68.4 5.9	73.2 6.2	76.6 5.5	79.0 5.0
40.0	60.7 2.5	66.5 4.7	71.5 6.0	74.7 5.4	76.9 5.0
42.0		64.5 3.6	69.5 5.4	72.7 5.3	74.7 5.0
44.0		62.5 2.6	67.4 4.3	70.7 5.2	72.3 5.0
46.0			65.2 3.3	68.4 4.5	69.9 5.0
48.0			62.9 2.3	66.0 3.4	67.2 4.0
50.0				63.4 2.4	64.3 2.9
危険角度 (°)	59	61	61	61	63.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SG性能 45mブーム + 2m + 35mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.9 8.0				
9.0	84.3 8.0				
10.0	83.7 8.0				
11.0	83.1 8.0				
12.0	82.5 8.0				
14.0	81.4 8.0				
16.0	80.2 8.0				
18.0	79.0 8.0				
20.0	77.7 7.5	83.7 4.9			
22.0	76.4 6.8	82.3 4.6			
24.0	75.0 6.3	80.9 4.3			
26.0	73.7 5.8	79.5 4.1			
28.0	72.3 5.4	78.1 3.9	83.5 2.8		
30.0	70.9 5.1	76.7 3.7	81.9 2.7		
32.0	69.5 4.8	75.2 3.5	80.3 2.6		
34.0	68.1 4.5	73.8 3.3	78.8 2.4	83.4 1.9	
36.0	66.6 4.2	72.3 3.1	77.3 2.3	81.7 1.8	
38.0	65.1 4.0	70.8 3.0	75.7 2.2	80.0 1.8	83.3 1.5
40.0	63.4 3.3	69.3 2.8	74.2 2.1	78.2 1.7	81.5 1.5
42.0	61.6 2.4	67.8 2.7	72.5 2.0	76.5 1.7	79.4 1.4
44.0		66.2 2.5	70.9 2.0	74.7 1.6	77.4 1.4
46.0		64.5 2.4	69.2 1.9	72.9 1.6	75.2 1.4
48.0		62.6 2.0	67.4 1.8	71.0 1.5	73.0 1.4
50.0			65.5 1.7	69.0 1.5	70.6 1.4
52.0			63.5 1.7	67.0 1.5	68.1 1.4
54.0				64.7 1.4	65.6 1.4
危険角度 (°)	60	61	62	63	63.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1



10.85m — 35m

スーパーラフィングジブ【45mブーム時】

SH性能 45mブーム + 2m + 10.85mSLジブ

オフセット	5°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.9	24.0								
7.0	84.0	24.0								
8.0	83.2	24.0								
9.0	82.3	24.0	84.2	24.0						
10.0	81.5	24.0	83.3	24.0						
11.0	80.6	24.0	82.4	24.0	84.9	24.0				
12.0	79.7	24.0	81.5	24.0	83.9	24.0				
14.0	78.0	24.0	79.7	24.0	81.9	24.0	83.9	22.6		
16.0	76.2	24.0	78.0	24.0	80.0	24.0	81.8	21.9	83.0	20.4
18.0	74.1	19.4	76.0	21.1	77.9	22.6	79.6	20.5	80.6	19.4
20.0	71.9	15.2	73.6	16.6	75.7	18.5	77.3	19.3	78.2	18.5
22.0	69.6	11.8	71.3	13.0	73.4	14.7	74.9	16.0	75.8	16.6
24.0	67.3	8.9	69.0	10.0	71.1	11.5	72.4	12.6	73.1	13.2
26.0	64.9	6.5	66.6	7.5	68.6	8.8	69.9	9.7	70.5	10.2
28.0			64.2	5.4	66.1	6.5	67.4	7.3	67.8	7.6
30.0							64.8	5.2	65.0	5.4
危険角度 (°)	63		63		64		64		64	
標準フック	24t		24t		24t		24t		24t	
フック質量 (t)	0.88		0.88		0.88		0.88		0.88	
巻掛本数	2		2		2		2		2	

SH性能 45mブーム + 2m + 15mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.3	12.0								
7.0	83.5	12.0								
8.0	82.6	12.0								
9.0	81.8	12.0								
10.0	81.0	12.0	84.3	12.0						
11.0	80.1	12.0	83.5	12.0						
12.0	79.3	12.0	82.6	12.0						
14.0	77.6	12.0	80.9	12.0	84.0	12.0				
16.0	75.9	12.0	79.1	12.0	82.2	12.0	84.7	12.0		
18.0	74.1	12.0	77.4	12.0	80.4	12.0	82.8	12.0	84.6	12.0
20.0	72.4	12.0	75.6	12.0	78.5	12.0	80.8	12.0	82.5	12.0
22.0	70.6	12.0	73.7	12.0	76.6	12.0	78.8	12.0	80.4	12.0
24.0	68.8	10.0	71.9	12.0	74.7	12.0	76.8	12.0	78.2	12.0
26.0	66.4	7.6	69.8	9.7	72.7	11.5	74.7	12.0	76.0	12.0
28.0	64.2	5.6	67.7	7.5	70.5	9.2	72.4	10.3	73.6	10.9
30.0			65.5	5.6	68.2	7.1	70.1	8.2	71.0	8.7
32.0					65.8	5.2	67.6	6.2	68.3	6.7
34.0							65.0	4.4	65.6	4.7
危険角度 (°)	63		64		64		64		64	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SH性能 45mブーム + 2m + 20mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.8	12.0								
7.0	84.0	12.0								
8.0	83.3	12.0								
9.0	82.5	12.0								
10.0	81.8	12.0								
11.0	81.0	12.0								
12.0	80.2	12.0	84.5	12.0						
14.0	78.7	12.0	83.0	12.0						
16.0	77.2	12.0	81.4	12.0						
18.0	75.6	12.0	79.9	12.0	83.7	12.0				
20.0	74.0	12.0	78.3	12.0	82.0	12.0				
22.0	72.3	12.0	76.6	12.0	80.3	12.0	83.4	11.3		
24.0	70.6	11.3	74.9	12.0	78.6	12.0	81.5	10.9	83.5	10.0
26.0	68.7	8.9	73.2	11.6	76.7	11.9	79.5	10.7	81.4	9.9
28.0	66.7	6.9	71.3	9.4	74.9	11.2	77.6	10.4	79.3	9.7
30.0	64.7	5.1	69.3	7.4	72.8	9.3	75.6	10.2	77.1	9.6
32.0			67.2	5.7	70.7	7.6	73.4	8.7	74.9	9.4
34.0			65.0	4.1	68.5	5.9	71.1	7.1	72.3	7.7
36.0					66.3	4.3	68.7	5.5	69.7	6.1
38.0							66.2	3.9	66.9	4.4
危険角度 (°)	63		64		64		64		64.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SH性能 45mブーム + 2m + 25mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
7.0	84.6	12.0								
8.0	83.9	12.0								
9.0	83.2	12.0								
10.0	82.5	12.0								
11.0	81.8	12.0								
12.0	81.2	12.0								
14.0	79.8	12.0	84.9	12.0						
16.0	78.4	12.0	83.4	12.0						
18.0	77.0	12.0	82.0	12.0						
20.0	75.5	12.0	80.5	12.0						
22.0	74.1	12.0	79.0	12.0	83.4	10.3				
24.0	72.6	12.0	77.4	11.4	81.7	9.8				
26.0	70.8	10.1	75.8	10.7	80.0	9.4	83.5	8.4		
28.0	68.9	8.0	74.1	10.1	78.3	9.0	81.7	8.2	84.2	7.2
30.0	67.1	6.3	72.3	8.9	76.5	8.7	79.8	8.0	82.2	7.2
32.0	65.2	4.7	70.4	7.3	74.8	8.3	77.9	7.8	80.2	7.1
34.0			68.5	5.7	72.9	7.6	75.9	7.6	78.1	7.1
36.0			66.5	4.3	70.8	6.3	73.9	7.4	75.9	7.0
38.0					68.7	4.9	71.7	6.2	73.7	6.9
40.0					66.4	3.4	69.4	4.9	71.1	5.6
42.0							67.0	3.4	68.3	4.1
危険角度 (°)	64		65		65		65		66	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SH性能 45mブーム + 2m + 30mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
8.0	84.4	9.5								
9.0	83.8	9.5								
10.0	83.2	9.5								
11.0	82.5	9.5								
12.0	81.9	9.5								
14.0	80.7	9.5								
16.0	79.4	9.5								
18.0	78.1	9.5	83.8	9.5						
20.0	76.8	9.5	82.4	9.5						
22.0	75.4	9.5	81.1	9.5						
24.0	74.1	9.5	79.7	9.5	84.1	8.1				
26.0	72.7	9.5	78.2	9.2	82.6	7.8				
28.0	71.2	9.0	76.7	8.7	81.1	7.5				
30.0	69.5	7.2	75.1	8.2	79.6	7.2	83.7	6.1		
32.0	67.7	5.7	73.5	7.7	78.1	7.0	82.0	5.9		
34.0			71.8	7.0	76.5	6.7	80.2	5.8	83.2	5.2
36.0			70.0	5.7	74.9	6.4	78.4	5.7	81.1	5.1
38.0			68.0	4.3	73.2	6.2	76.6	5.5	79.0	5.0
40.0					71.3	5.3	74.7	5.4	76.9	5.0
42.0					69.1	4.0	72.7	5.3	74.7	5.0
44.0							70.5	4.3	72.3	5.0
46.0							68.1	3.1	69.7	3.9
危険角度 (°)	66		67		67.5		67.5		67.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SH性能 45mブーム + 2m + 35mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
8.0	84.9	8.0								
9.0	84.3	8.0								
10.0	83.7	8.0								
11.0	83.1	8.0								
12.0	82.5	8.0								
14.0	81.4	8.0								
16.0	80.2	8.0								
18.0	79.0	8.0								
20.0	77.7	7.5	83.7	4.9						
22.0	76.4	6.8	82.3	4.6						
24.0	75.0	6.3	80.9	4.3						
26.0	73.7	5.8	79.5	4.1						
28.0	72.3	5.4	78.1	3.9	83.5	2.8				
30.0	70.9	5.1	76.7	3.7	81.9	2.7				
32.0	69.5	4.8	75.2	3.5	80.3	2.6				
34.0	68.1	4.5	73.8	3.3	78.8	2.4	83.4	1.9		
36.0			72.3	3.1	77.3	2.3	81.7	1.8		



10.85m — 35m

スーパーラフィングジブ【45mブーム時】

SJ性能 45mブーム + 2m + 10.85mSLジブ

オフセット	5°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.9 24.0				
7.0	84.0 24.0				
8.0	83.2 24.0				
9.0	82.3 24.0	84.2 24.0			
10.0	81.5 24.0	83.3 24.0			
11.0	80.6 24.0	82.4 24.0	84.9 24.0		
12.0	79.7 24.0	81.5 24.0	83.9 24.0		
14.0	78.0 24.0	79.7 24.0	81.9 24.0	83.9 22.6	
16.0	76.0 21.0	77.9 22.9	80.0 24.0	81.8 21.9	83.0 20.4
18.0	73.9 15.8	75.7 17.2	77.7 19.2	79.6 20.5	80.6 19.4
20.0	71.6 11.7	73.3 13.0	75.5 14.7	77.1 15.9	78.1 16.7
22.0	69.3 8.4	71.0 9.8	73.2 11.2	74.6 12.3	75.5 12.9
24.0			70.8 8.5	72.2 9.4	72.9 9.8
危険角度 (°)	68	69	69	70	71
標準フック	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
巻掛本数	2	2	2	2	2

SJ性能 45mブーム + 2m + 15mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.3 12.0				
7.0	83.5 12.0				
8.0	82.6 12.0				
9.0	81.8 12.0				
10.0	81.0 12.0	84.3 12.0			
11.0	80.1 12.0	83.5 12.0			
12.0	79.3 12.0	82.6 12.0			
14.0	77.6 12.0	80.9 12.0	84.0 12.0		
16.0	75.9 12.0	79.1 12.0	82.2 12.0	84.7 12.0	
18.0	74.1 12.0	77.4 12.0	80.4 12.0	82.8 12.0	84.6 12.0
20.0	72.4 12.0	75.6 12.0	78.5 12.0	80.8 12.0	82.5 12.0
22.0	70.3 9.4	73.7 11.8	76.6 12.0	78.8 12.0	80.4 12.0
24.0		71.7 9.2	74.6 10.9	76.8 12.0	78.2 12.0
26.0		69.6 6.8	72.4 8.5	74.5 9.6	75.8 10.4
28.0			70.2 6.3	72.2 7.5	73.3 8.1
危険角度 (°)	69	69	69	70	71
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SJ性能 45mブーム + 2m + 20mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.8 12.0				
7.0	84.0 12.0				
8.0	83.3 12.0				
9.0	82.5 12.0				
10.0	81.8 12.0				
11.0	81.0 12.0				
12.0	80.2 12.0	84.5 12.0			
14.0	78.7 12.0	83.0 12.0			
16.0	77.2 12.0	81.4 12.0			
18.0	75.6 12.0	79.9 12.0	83.7 12.0		
20.0	74.0 12.0	78.3 12.0	82.0 12.0		
22.0	72.2 10.6	76.6 12.0	80.3 12.0	83.4 11.3	
24.0	70.3 8.0	74.8 10.8	78.6 12.0	81.5 10.9	83.5 10.0
26.0		72.9 8.5	76.6 10.5	79.5 10.7	81.4 9.9
28.0		71.0 6.6	74.6 8.5	77.5 9.9	79.3 9.7
30.0			72.5 6.7	75.3 8.0	77.0 8.9
32.0			70.4 4.8	73.1 6.3	74.6 7.1
34.0				70.8 4.6	72.1 5.4
危険角度 (°)	69	69.5	69.5	70	71
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SJ性能 45mブーム + 2m + 25mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
7.0	84.6 12.0				
8.0	83.9 12.0				
9.0	83.2 12.0				
10.0	82.5 12.0				
11.0	81.8 12.0				
12.0	81.2 12.0				
14.0	79.8 12.0	84.9 12.0			
16.0	78.4 12.0	83.4 12.0			
18.0	77.0 12.0	82.0 12.0			
20.0	75.5 12.0	80.5 12.0			
22.0	74.0 11.5	79.0 12.0	83.4 10.3		
24.0	72.2 9.0	77.4 11.4	81.7 9.8		
26.0	70.4 6.9	75.7 9.9	80.0 9.4	83.5 8.4	
28.0		73.8 8.0	78.3 9.0	81.7 8.2	84.2 7.2
30.0		71.9 6.3	76.5 8.4	79.8 8.0	82.2 7.2
32.0			74.5 6.8	77.9 7.8	80.2 7.1
34.0			72.5 5.3	75.8 6.8	78.1 7.1
36.0				73.6 5.4	75.8 6.3
38.0				71.4 3.9	73.4 4.9
危険角度 (°)	69	70.5	70.5	70.5	71
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SJ性能 45mブーム + 2m + 30mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.4 9.5				
9.0	83.8 9.5				
10.0	83.2 9.5				
11.0	82.5 9.5				
12.0	81.9 9.5				
14.0	80.7 9.5				
16.0	79.4 9.5				
18.0	78.1 9.5	83.8 9.5			
20.0	76.8 9.5	82.4 9.5			
22.0	75.4 9.5	81.1 9.5			
24.0	74.1 9.5	79.7 9.5	84.1 8.1		
26.0	72.4 7.7	78.2 9.2	82.6 7.8		
28.0		76.7 8.7	81.1 7.5		
30.0		75.0 7.5	79.6 7.2	83.7 6.1	
32.0		73.2 6.0	78.1 7.0	82.0 5.9	
34.0			76.5 6.7	80.2 5.8	83.2 5.2
36.0			74.7 5.5	78.4 5.7	81.1 5.1
38.0				76.6 5.5	79.0 5.0
40.0				74.5 4.7	76.9 5.0
42.0					74.6 4.5
危険角度 (°)	71	72	73	73	73
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SJ性能 45mブーム + 2m + 35mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.9 8.0				
9.0	84.3 8.0				
10.0	83.7 8.0				
11.0	83.1 8.0				
12.0	82.5 8.0				
14.0	81.4 8.0				
16.0	80.2 8.0				
18.0	79.0 8.0				
20.0	77.7 7.5	83.7 4.9			
22.0	76.4 6.8	82.3 4.6			
24.0	75.0 6.3	80.9 4.3			
26.0	73.7 5.8	79.5 4.1			
28.0	72.3 5.4	78.1 3.9	83.5 2.8		
30.0		76.7 3.7	81.9 2.7		
32.0		75.2 3.5	80.3 2.6		
34.0		73.8 3.3	78.8 2.4	83.4 1.9	
36.0			77.3 2.3	81.7 1.8	
38.0			75.7 2.2	80.0 1.8	83.3 1.5
40.0			74.2 2.1	78.2 1.7	81.5 1.5
42.0				76.5 1.7	79.4 1.4
44.0				74.7 1.6	77.4 1.4
46.0					75.2 1.4
危険角度 (°)	71	72.5	73	73	73.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1



10.85m — 35m

スーパーラフィングジブ【45mブーム時】

SK性能 45mブーム + 2m + 10.85mSLジブ

オフセット	5°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.9	24.0			
7.0	84.0	24.0			
8.0	83.2	24.0			
9.0	82.3	24.0	84.2	24.0	
10.0	81.5	24.0	83.3	24.0	
11.0	80.6	24.0	82.4	24.0	
12.0	79.7	24.0	81.5	24.0	
14.0	77.7	19.3	79.6	21.7	81.9
16.0	75.6	13.6	77.5	15.7	79.6
18.0			75.3	11.0	77.4
20.0			75.2	9.5	76.7
22.0					
24.0					
26.0					
28.0					
30.0					
32.0					
34.0					
36.0					
危険角度 (°)	73.5	74	74	75	76
標準フック	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
巻掛本数	2	2	2	2	2

SK性能 45mブーム + 2m + 15mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.3	12.0			
7.0	83.5	12.0			
8.0	82.6	12.0			
9.0	81.8	12.0			
10.0	81.0	12.0	84.3	12.0	
11.0	80.1	12.0	83.5	12.0	
12.0	79.3	12.0	82.6	12.0	
14.0	77.6	12.0	80.9	12.0	84.0
16.0	75.9	12.0	79.1	12.0	82.2
18.0	74.0	10.1	77.4	12.0	80.4
20.0			75.4	10.0	78.5
22.0					76.4
24.0					76.5
26.0					76.5
28.0					76.5
30.0					76.5
32.0					76.5
34.0					76.5
36.0					76.5
危険角度 (°)	73.5	74	75	75	76
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SK性能 45mブーム + 2m + 20mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.8	12.0			
7.0	84.0	12.0			
8.0	83.3	12.0			
9.0	82.5	12.0			
10.0	81.8	12.0			
11.0	81.0	12.0			
12.0	80.2	12.0	84.5	12.0	
14.0	78.7	12.0	83.0	12.0	
16.0	77.2	12.0	81.4	12.0	
18.0	75.6	11.3	79.9	12.0	83.7
20.0			78.2	11.7	82.0
22.0			76.4	8.9	80.2
24.0					78.2
26.0					76.2
28.0					77.2
30.0					76.7
32.0					76.7
34.0					76.7
36.0					76.7
危険角度 (°)	74	75	75	75.5	76
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SK性能 45mブーム + 2m + 25mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.6	12.0			
7.0	83.9	12.0			
8.0	83.2	12.0			
9.0	82.5	12.0			
10.0	81.8	12.0			
11.0	81.0	12.0			
12.0	80.2	12.0			
14.0	79.8	12.0	84.9	12.0	
16.0	78.4	12.0	83.4	12.0	
18.0	77.0	12.0	82.0	12.0	
20.0	75.2	9.0	80.5	12.0	
22.0			78.8	10.3	83.4
24.0			77.0	8.1	81.7
26.0					79.9
28.0					77.9
30.0					79.9
32.0					77.9
34.0					77.9
36.0					77.9
危険角度 (°)	74	75.5	76.5	76.5	77
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SK性能 45mブーム + 2m + 30mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.4	9.5			
9.0	83.8	9.5			
10.0	83.2	9.5			
11.0	82.5	9.5			
12.0	81.9	9.5			
14.0	80.7	9.5			
16.0	79.4	9.5			
18.0	78.1	9.5	83.8	9.5	
20.0	76.8	9.5	82.4	9.5	
22.0			81.1	9.5	
24.0			79.7	9.2	84.1
26.0			77.9	7.3	82.6
28.0					81.1
30.0					79.5
32.0					77.7
34.0					80.2
36.0					81.1
危険角度 (°)	75.5	76.5	76.5	78.5	79
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1


SK性能 45mブーム + 2m + 35mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.9	8.0			
9.0	84.3	8.0			
10.0	83.7	8.0			
11.0	83.1	8.0			
12.0	82.5	8.0			
14.0	81.4	8.0			
16.0	80.2	8.0			
18.0	79.0	8.0			
20.0	77.7	7.5	83.7	4.9	
22.0			82.3	4.6	
24.0			80.9	4.3	
26.0			79.5	4.1	
28.0			78.1	3.9	
30.0					83.5
32.0					81.9
34.0					80.3
36.0					78.8
38.0					78.8
40.0					78.8
危険角度 (°)	76.5	77	77.5	78.5	79.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1



スーパーラフングジブ 作業範囲図【50mブーム時】

- ① 50m ブーム + 2m + 10.85m SLジブ (オフセット 5°)
- ② 50m ブーム + 2m + 15m SLジブ (オフセット 0°)
- ③ 50m ブーム + 2m + 20m SLジブ (オフセット 0°)
- ④ 50m ブーム + 2m + 25m SLジブ (オフセット 0°)
- ⑤ 50m ブーム + 2m + 30m SLジブ (オフセット 0°)
- ⑥ 50m ブーム + 2m + 35m SLジブ (オフセット 0°)
- ⑦ 50m ブーム + 2m + 10.85m SLジブ (オフセット 60°)
- ⑧ 50m ブーム + 2m + 15m SLジブ (オフセット 60°)
- ⑨ 50m ブーム + 2m + 20m SLジブ (オフセット 60°)
- ⑩ 50m ブーム + 2m + 25m SLジブ (オフセット 60°)
- ⑪ 50m ブーム + 2m + 30m SLジブ (オフセット 60°)
- ⑫ 50m ブーム + 2m + 35m SLジブ (オフセット 60°)

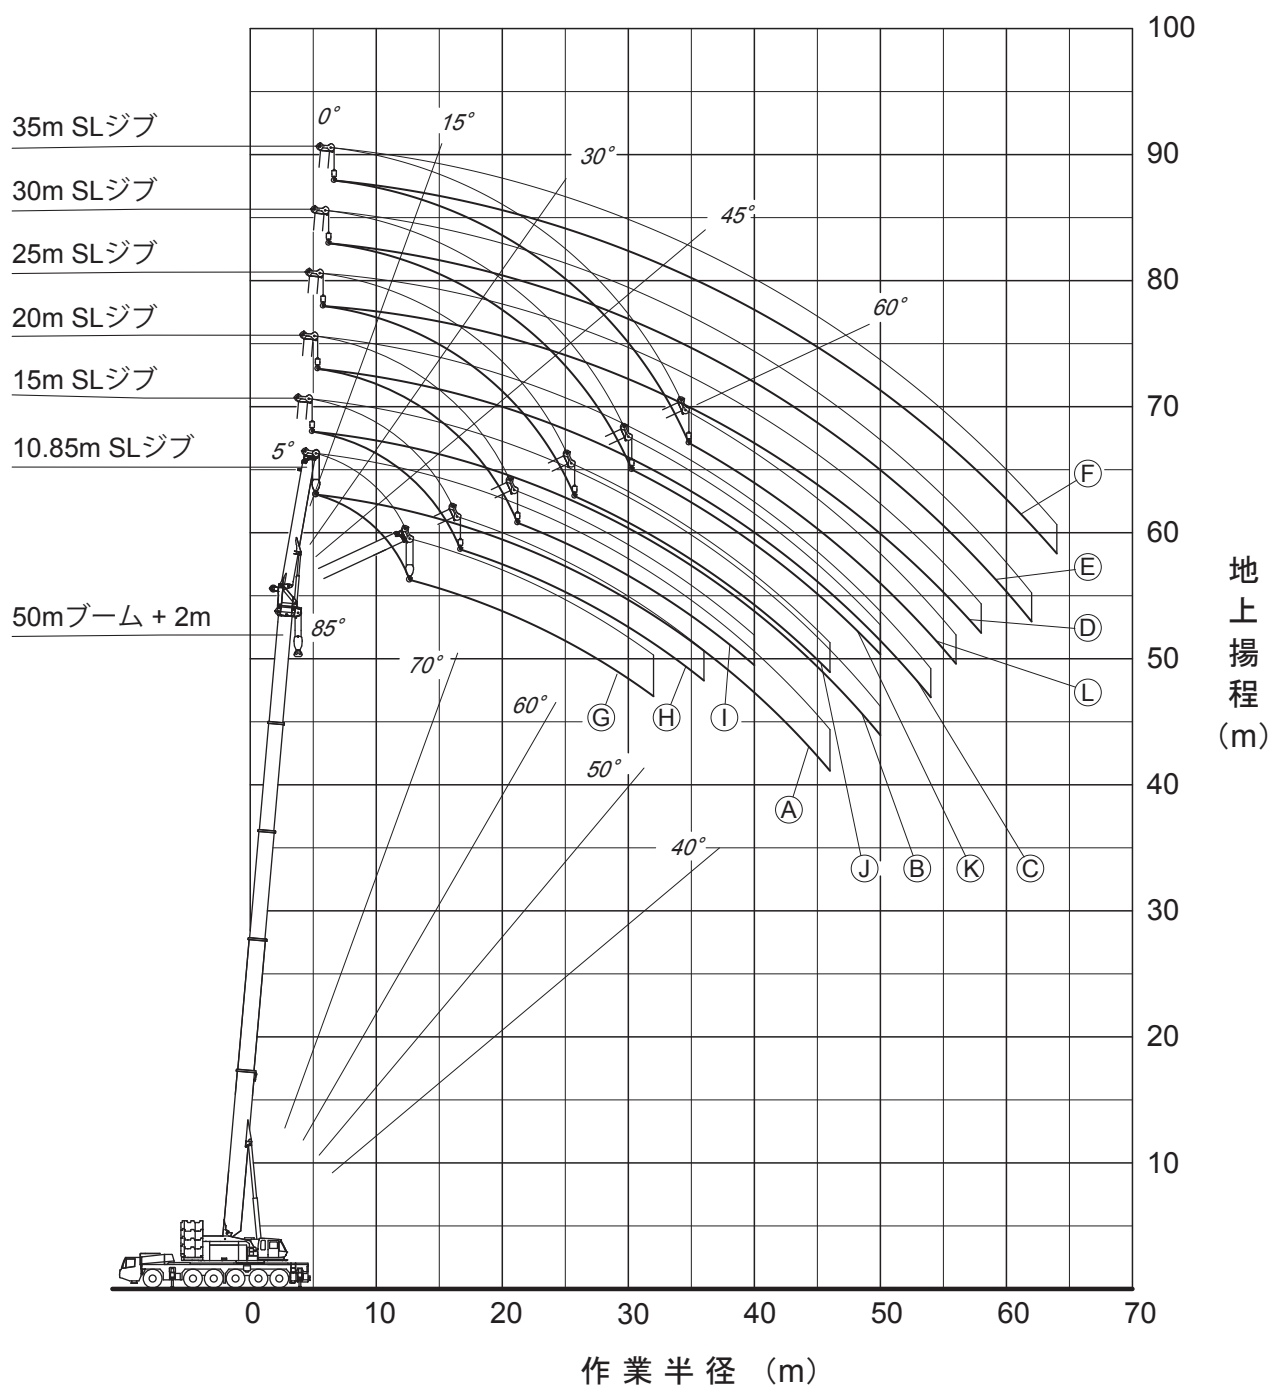

注1. 本図は、ブームおよびSLジブのたわみを含んでいません。
2. SA性能時のものを示しています。



10.85m — 35m

スーパーラフィングジブ【50mブーム時】

SA性能 50mブーム + 2m + 10.85mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
7.0	84.7	21.0			
8.0	83.9	21.0			
9.0	83.2	21.0			
10.0	82.4	21.0	84.2	21.0	
11.0	81.6	21.0	83.4	21.0	
12.0	80.9	21.0	82.7	21.0	
14.0	79.4	21.0	81.1	21.0	
16.0	77.9	21.0	79.5	21.0	
18.0	76.4	21.0	77.9	21.0	
20.0	74.9	21.0	76.3	21.0	
22.0	72.9	20.0	74.3	19.6	
24.0	70.9	18.4	72.4	17.8	
26.0	68.9	16.4	70.4	16.0	
28.0	66.9	14.7	68.3	14.5	
30.0	64.7	13.3	66.3	13.1	
32.0	62.6	11.9	64.1	11.8	
34.0	60.4	10.7	61.9	10.7	
36.0	58.1	9.5	59.6	9.7	
38.0	55.8	8.3	57.3	8.5	
40.0	53.3	7.2	54.8	7.4	
42.0	50.8	6.1	52.2	6.5	
44.0	48.2	4.8	49.4	5.2	
46.0	45.5	3.7	46.5	4.0	
48.0					
危険角度 (°)	43	43	43	48	65
標準フック	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
巻掛本数	2	2	2	2	2

SA性能 50mブーム + 2m + 15mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.8	12.0			
7.0	84.1	12.0			
8.0	83.4	12.0			
9.0	82.6	12.0			
10.0	81.9	12.0			
11.0	81.2	12.0	84.3	12.0	
12.0	80.4	12.0	83.6	12.0	
14.0	78.9	12.0	82.0	12.0	
16.0	77.4	12.0	80.5	12.0	
18.0	75.9	12.0	78.9	12.0	
20.0	74.4	12.0	77.4	12.0	
22.0	72.8	12.0	75.8	12.0	
24.0	71.2	12.0	74.2	12.0	
26.0	69.5	12.0	72.5	12.0	
28.0	67.9	12.0	70.9	12.0	
30.0	66.2	12.0	69.2	12.0	
32.0	64.3	11.7	67.2	11.9	
34.0	62.4	10.7	65.3	10.9	
36.0	60.4	9.7	63.3	9.9	
38.0	58.4	8.8	61.2	9.1	
40.0	56.3	7.9	59.0	8.2	
42.0	54.1	6.9	56.8	7.4	
44.0	51.7	6.0	54.6	6.5	
46.0	49.3	4.8	52.0	5.6	
48.0	46.7	3.8	49.3	4.6	
50.0	44.0	2.8	46.5	3.5	
52.0			43.6	2.5	
危険角度 (°)	43	43	43	48.5	65
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SA性能 50mブーム + 2m + 20mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
7.0	84.6	12.0			
8.0	84.0	12.0			
9.0	83.3	12.0			
10.0	82.7	12.0			
11.0	82.0	12.0			
12.0	81.3	12.0			
14.0	80.0	12.0	84.0	12.0	
16.0	78.6	12.0	82.6	12.0	
18.0	77.3	12.0	81.2	12.0	
20.0	75.9	12.0	79.8	12.0	
22.0	74.5	12.0	78.4	12.0	
24.0	73.0	12.0	76.9	12.0	
26.0	71.6	12.0	75.4	12.0	
28.0	70.1	12.0	73.9	12.0	
30.0	68.6	12.0	72.4	12.0	
32.0	67.1	12.0	70.6	11.1	
34.0	65.3	11.0	68.8	10.3	
36.0	63.5	10.0	67.0	9.5	
38.0	61.6	9.2	65.1	8.8	
40.0	59.7	8.4	63.2	8.2	
42.0	57.8	7.5	61.2	7.6	
44.0	55.8	6.6	59.2	6.9	
46.0	53.5	5.8	57.0	6.1	
48.0	51.3	5.0	54.7	5.5	
50.0	48.9	4.0	52.4	4.8	
52.0	46.4	3.1	50.0	4.0	
54.0	43.9	2.3	47.4	3.1	
56.0			44.7	2.3	
危険角度 (°)	43	43	43.5	48.5	66
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SA性能 50mブーム + 2m + 25mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.4	10.0			
9.0	83.8	10.0			
10.0	83.2	10.0			
11.0	82.6	10.0			
12.0	82.0	10.0			
14.0	80.7	10.0			
16.0	79.5	10.0	84.2	10.0	
18.0	78.2	10.0	83.0	10.0	
20.0	76.9	10.0	81.7	10.0	
22.0	75.6	10.0	80.4	10.0	
24.0	74.3	10.0	79.0	10.0	
26.0	73.0	10.0	77.7	10.0	
28.0	71.6	10.0	76.4	10.0	
30.0	70.3	10.0	74.8	9.9	
32.0	68.9	10.0	73.2	9.4	
34.0	67.5	10.0	71.6	8.9	
36.0	65.8	9.4	70.0	8.5	
38.0	64.1	8.8	68.3	8.1	
40.0	62.4	8.3	66.6	7.8	
42.0	60.6	7.6	64.8	7.2	
44.0	58.8	6.8	62.9	6.7	
46.0	57.0	6.1	61.0	6.2	
48.0	55.0	5.5	59.1	5.7	
50.0	53.0	4.8	57.1	5.1	
52.0	50.9	4.1	54.9	4.6	
54.0	48.7	3.3	52.7	4.1	
56.0	46.5	2.5	50.4	3.6	
58.0	44.1	1.8	48.0	2.8	
60.0			45.5	2.0	
62.0				44.8	1.8
危険角度 (°)	43	43	43.5	48.5	66
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SA性能 50mブーム + 2m + 30mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.9	8.5			
9.0	84.3	8.5			
10.0	83.8	8.5			
11.0	83.2	8.5			
12.0	82.6	8.5			
14.0	81.5	8.5			
16.0	80.3	8.5			
18.0	79.2	8.5	84.5	8.5	
20.0	78.0	8.5	83.3	8.5	
22.0	76.8	8.5	82.1	8.5	
24.0	75.6	8.5	80.9	8.5	
26.0	74.4	8.5	79.7	8.5	
28.0	73.2	8.5	78.4	8.5	
30.0	71.9	8.5	77.0	8.4	
32.0	70.7	8.5	75.6	8.0	
34.0	69.4	8.5	74.2	7.7	
36.0	68.0	8.1	72.7	7.3	
38.0	66.5	7.5	71.2	6.9	
40.0	65.0	7.1	69.7	6.5	
42.0	63.4	6.6	68.2	6.2	
44.0	61.9	6.2	66.6	6.0	
46.0	60.3	5.9	64.9	5.7	
48.0	58.7	5.6	63.2	5.5	
50.0	56.8	5.1	61.4	5.2	
52.0	54.8	4.5	59.6	4.8	
54.0	52.8	4.1	57.8	4.3	
56.0	50.7	3.4	55.7	3.9	
58.0	48.6	2.7	53.5	3.5	
60.0	46.4	2.0	51.2	3.1	
62.0	44.1	1.4	48.9	2.5	
64.0			46.4	1.8	
66.0					
危険角度 (°)	43	44	44	48.5	66
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SA性能 50mブーム + 2m + 35mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
9.0	84.7	7.0			
10.0	84.2	7.0			
11.0	83.7	7.0			
12.0	83.2	7.0			
14.0	82.1	7.0			
16.0	81.1	7.0			
18.0	80.0	7.0			
20.0	78.9	7.0	84.5	4.9	
22.0	77.9	7.0	83.2	4.6	
24.0	76.6	6.6	82.0	4.4	
26.0	75.4	6.1	80.7	4.2	
28.0	74.1	5.7	79.4	4.0	
30.0	72.9	5.3	78.1	3.8	
32.0	71.6	5.0	76.8	3.6	
34.0	70.3	4.7	75.4	3.4	
36.0	69.0	4.4	74.1	3.2	
38.0	67.7	4.2	72.7	3.0	
40.0	66.3	4.0	71.3	2.9	
42.0	64.9	3.8	69.9	2.7	
44.0	63.5	3.6	68.5	2.6	
46.0	62.0	3.4	67.0	2.5	
48.0	60.5	3.2	65.5	2.4	
50.0	59.0	3.0	64.0	2.3	
52.0	57.4	2.9	62.4	2.2	
54.0	55.8	2.7	60.8	2.1	
56.0	54.1	2.6	59.1	2.0	
58.0	52.4	2.4	57.4	1.9	
60.0	50.6	2.3	55.6	1.8	
62.0	48.7	2.2	53.6	1.8	
64.0	46.8	1.6	51.7	1.7	
66.0			49.6	1.7	
68.0			47.5	1.6	
70.0					
危険角度 (°)	45	45	46	48.5	66
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1



10.85m — 35m

スーパーラフィングジブ【50mブーム時】

SB性能 50mブーム + 2m + 10.85mSLジブ

オフセット	5°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
7.0	84.7	21.0								
8.0	83.9	21.0								
9.0	83.2	21.0								
10.0	82.4	21.0	84.2	21.0						
11.0	81.6	21.0	83.4	21.0						
12.0	80.9	21.0	82.7	21.0	84.9	21.0				
14.0	79.4	21.0	81.1	21.0	83.3	21.0	84.9	21.0		
16.0	77.9	21.0	79.5	21.0	81.7	21.0	83.1	21.0	84.2	19.8
18.0	76.4	21.0	77.9	21.0	80.1	21.0	81.2	19.8	82.2	18.7
20.0	74.9	21.0	76.3	21.0	78.1	20.0	79.2	18.6	80.1	17.7
22.0	72.9	20.0	74.3	19.6	76.2	18.3	77.2	17.4	78.0	16.8
24.0	70.9	18.4	72.4	17.8	74.2	16.7	75.2	16.0	75.8	15.7
26.0	68.9	16.4	70.4	16.0	72.1	15.3	73.2	14.8	73.6	14.6
28.0	66.9	14.7	68.3	14.5	70.1	14.1	71.1	13.7	71.4	13.5
30.0	64.7	13.3	66.3	13.1	68.0	13.0	68.9	12.6	69.1	12.6
32.0	62.6	11.9	64.1	11.8	65.8	12.0	66.7	11.7	66.7	11.7
34.0	60.4	10.7	61.9	10.7	63.4	10.8	64.5	10.9		
36.0	58.0	9.1	59.6	9.7	61.0	9.8	61.9	9.8		
38.0	55.6	7.4	57.2	8.0	58.5	8.7	59.3	8.9		
40.0	53.2	6.0	54.7	6.5	55.8	7.1	56.5	7.4		
42.0	50.6	4.6	52.0	5.1	53.0	5.6	53.6	5.8		
44.0	48.0	3.4	49.2	3.8	50.2	4.3	50.5	4.4		
46.0			46.2	2.7	47.2	3.0				
危険角度 (°)	45.5		45.5		46		48		65	
標準フック	24t		24t		24t		24t		24t	
フック質量 (t)	0.88		0.88		0.88		0.88		0.88	
巻掛本数	2		2		2		2		2	

SB性能 50mブーム + 2m + 15mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.8	12.0								
7.0	84.1	12.0								
8.0	83.4	12.0								
9.0	82.6	12.0								
10.0	81.9	12.0								
11.0	81.2	12.0	84.3	12.0						
12.0	80.4	12.0	83.6	12.0						
14.0	78.9	12.0	82.0	12.0						
16.0	77.4	12.0	80.5	12.0	83.4	12.0				
18.0	75.9	12.0	78.9	12.0	81.8	12.0	84.0	12.0		
20.0	74.4	12.0	77.4	12.0	80.2	12.0	82.3	12.0	83.8	12.0
22.0	72.8	12.0	75.8	12.0	78.5	12.0	80.5	12.0	81.9	12.0
24.0	71.2	12.0	74.2	12.0	76.8	12.0	78.7	12.0	79.9	12.0
26.0	69.5	12.0	72.5	12.0	75.1	12.0	76.9	12.0	77.9	12.0
28.0	67.9	12.0	70.9	12.0	73.4	12.0	75.1	12.0	75.9	12.0
30.0	66.2	12.0	69.2	12.0	71.7	12.0	73.0	11.8	73.8	11.6
32.0	64.3	11.7	67.2	11.9	69.6	11.3	70.9	11.0	71.6	10.8
34.0	62.4	10.7	65.3	10.9	67.6	10.5	68.8	10.2	69.4	10.1
36.0	60.4	9.7	63.3	9.9	65.4	9.7	66.6	9.5	67.1	9.4
38.0	58.3	8.6	61.2	9.1	63.2	9.0	64.3	8.8		
40.0	56.1	7.1	59.0	8.2	61.0	8.4	62.0	8.3		
42.0	53.9	5.8	56.7	6.8	58.6	7.5	59.6	7.7		
44.0	51.5	4.6	54.4	5.6	56.0	6.3	57.0	6.7		
46.0	49.0	3.5	51.7	4.4	53.3	5.0	54.1	5.3		
48.0	46.3	2.5	49.0	3.3	50.5	3.8	51.2	4.1		
50.0			46.3	2.3	47.6	2.8				
危険角度 (°)	45.5		45.5		46		48.5		65	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SB性能 50mブーム + 2m + 20mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
7.0	84.6	12.0								
8.0	84.0	12.0								
9.0	83.3	12.0								
10.0	82.7	12.0								
11.0	82.0	12.0								
12.0	81.3	12.0								
14.0	80.0	12.0	84.0	12.0						
16.0	78.6	12.0	82.6	12.0						
18.0	77.3	12.0	81.2	12.0	84.8	12.0				
20.0	75.9	12.0	79.8	12.0	83.3	12.0				
22.0	74.5	12.0	78.4	12.0	81.8	12.0	84.7	11.3		
24.0	73.0	12.0	76.9	12.0	80.3	12.0	82.9	11.0	84.7	9.9
26.0	71.6	12.0	75.4	12.0	78.6	11.9	81.2	10.7	82.8	9.9
28.0	70.1	12.0	73.9	12.0	76.9	11.4	79.4	10.5	80.9	9.7
30.0	68.6	12.0	72.4	12.0	75.2	11.0	77.6	10.1	79.0	9.6
32.0	67.1	12.0	70.6	11.1	73.5	10.4	75.8	9.6	77.1	9.2
34.0	65.3	11.0	68.8	10.3	71.7	9.7	73.9	9.2	75.0	8.8
36.0	63.5	10.0	67.0	9.5	69.8	9.0	71.9	8.7	72.7	8.5
38.0	61.6	9.2	65.1	8.8	67.8	8.4	69.8	8.2	70.5	8.1
40.0	59.7	8.3	63.2	8.2	65.8	7.8	67.6	7.6	68.1	7.6
42.0	57.7	7.0	61.2	7.6	63.7	7.3	65.4	7.1		
44.0	55.6	5.8	59.2	6.9	61.5	6.8	63.1	6.7		
46.0	53.3	4.7	56.9	5.9	59.3	6.3	60.7	6.2		
48.0	51.0	3.7	54.6	4.8	57.0	5.6	58.2	5.8		
50.0	48.7	2.8	52.2	3.8	54.5	4.6	55.5	5.0		
52.0	46.3	1.9	49.7	2.9	51.8	3.6	52.6	3.9		
54.0			47.1	2.0	49.1	2.6	49.5	2.8		
危険角度 (°)	45.5		45.5		46.5		48.5		66	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SB性能 50mブーム + 2m + 25mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
8.0	84.4	10.0								
9.0	83.8	10.0								
10.0	83.2	10.0								
11.0	82.6	10.0								
12.0	82.0	10.0								
14.0	80.7	10.0								
16.0	79.5	10.0	84.2	10.0						
18.0	78.2	10.0	83.0	10.0						
20.0	76.9	10.0	81.7	10.0						
22.0	75.6	10.0	80.4	10.0			84.5	10.0		
24.0	74.3	10.0	79.0	10.0	83.0	9.9				
26.0	73.0	10.0	77.7	10.0	81.5	9.5	84.9	8.4		
28.0	71.6	10.0	76.4	10.0	79.9	9.1	83.3	8.2		
30.0	70.3	10.0	74.8	9.9	78.3	8.8	81.6	8.0	83.7	7.2
32.0	68.9	10.0	73.2	9.4	76.8	8.5	80.0	7.8	81.8	7.1
34.0	67.5	10.0	71.6	8.9	75.2	8.2	78.3	7.6	79.9	7.1
36.0	65.8	9.4	70.0	8.5	73.4	7.9	76.5	7.5	78.0	7.0
38.0	64.1	8.8	68.3	8.1	71.7	7.7	74.6	7.2	75.9	6.9
40.0	62.4	8.3	66.6	7.8	69.9	7.4	72.7	6.9	73.9	6.6
42.0	60.6	7.6	64.8	7.2	68.1	6.9	70.7	6.6	71.7	6.4
44.0	58.8	6.8	62.9	6.7	66.2	6.4	68.7	6.3	69.4	6.1
46.0	56.9	5.7	61.0	6.2	64.3	6.0	66.6	5.9	67.1	5.8
48.0	54.8	4.7	59.1	5.7	62.3	5.6	64.5	5.5		
50.0	52.7	3.8	57.1	5.1	60.3	5.2	62.1	5.1		
52.0	50.6	3.0	54.8	4.2	58.0	4.8	59.6	4.8		
54.0	48.4	2.2	52.5	3.3	55.6	4.2	57.0	4.5		
56.0	46.2	1.4	50.2	2.5	53.0	3.3	54.1	3.7		
58.0			47.7	1.7	50.3	2.4	51.0	2.8		
60.0					47.5	1.6				
危険角度 (°)	45.5		46		46.5		48.5		66	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SB性能 50mブーム + 2m + 30mSLジブ

オフセット	0		15		30		45		60	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
8.0	84.9	8.5								
9.0	84.3	8.5								
10.0	83.8	8.5								
11.0	83.2	8.5								
12.0	82.6	8.5								
14.0	81.5	8.5								
16.0	80.3	8.5								
18.0	79.2	8.5	84.5	8.5						
20.0	78.0	8.5	83.3	8.5						
22.0	76.8	8.5	82.1	8.5						
24.0	75.6	8.5	80.9	8.5						
26.0	74.4	8.5	79.7	8.5	84.3	7.8				
28.0	73.2	8.5	78.4	8.5	82.9	7.5				
30.0	71.9	8.5	77.0	8.4	81.4	7.3				
32.0	70.7	8.5	75.6	8.0	80.0	7.0	83.5	5.9		
34.0	69.4	8.5	74.2	7.7	78.5	6.8	81.9	5.8	84.4	5.2
36.0	68.0	8.1	72.7	7.3	77.0	6.5	80.3	5.7	82.6	5.1
38.0	66.5	7.5	71.2	6.9	75.5	6.3	78.7	5.6	80.8	5.1
40.0	65.0	7.1	69.7	6.5	73.9	6.1	77.0	5.5	78.9	5.0
42.0	63.4	6.6	68.2	6.2	72.3	5.9	75.3	5.4	77.0	5.0
44.0	61.9	6.2	66.6	6.0	70.6	5.7	73.6	5.3	75.1	5.0
46.0	60.3	5.9	64.9	5.7	68.9	5.5	71.6	5.2	72.9	4.9
48.0	58.7	5.6	63.2	5.5	67.1	5.4	69.6	5.1	70.6	4.9
50.0	56.6	4.7	61.4	5.2	65.3	5.0	67.6	4.8	68.3	4.7
52.0	54.6	3.9	59.6	4.8	63.4	4.7	65.5	4.6		
54.0	52.4	3.1	57.8	4.3	61.3	4.4	63.3	4.3		
56.0	50.3	2.3	55.6	3.7	59.1	4.1	60.9	4.0		
58.0	48.2	1.7	53.2	2.9	56.9	3.7	58.4	3.8		
60.0			50.9	2.2	54.5	3.1	55.7	3.5		
62.0			48.5	1.5	51.8	2.3	52.8	2.7		
64.0					49.0	1.5	49.6	1.9		
危険角度 (°)	47		47		47		48.5		66	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	



10.85m — 35m

スーパーラフィングジブ【50mブーム時】

SC性能 50mブーム + 2m + 10.85mSLジブ

オフセット	5°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
7.0	84.7	21.0			
8.0	83.9	21.0			
9.0	83.2	21.0			
10.0	82.4	21.0	84.2	21.0	
11.0	81.6	21.0	83.4	21.0	
12.0	80.9	21.0	82.7	21.0	
14.0	79.4	21.0	81.1	21.0	
16.0	77.9	21.0	79.5	21.0	
18.0	76.4	21.0	77.9	21.0	
20.0	74.9	21.0	76.3	21.0	
22.0	72.9	20.0	74.3	19.6	
24.0	70.9	18.4	72.4	17.8	
26.0	68.9	16.4	70.4	16.0	
28.0	66.9	14.7	68.3	14.5	
30.0	64.7	13.3	66.3	13.1	
32.0	62.5	11.1	64.1	11.8	
34.0	60.1	9.1	61.8	9.8	
36.0	57.8	7.4	59.4	8.0	
38.0	55.4	5.8	56.9	6.4	
40.0	52.9	4.4	54.4	5.0	
42.0	50.4	3.2	51.7	3.6	
44.0					
危険角度 (°)	48	49	49	49	65
標準フック	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
巻掛本数	2	2	2	2	2

SC性能 50mブーム + 2m + 15mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.8	12.0			
7.0	84.1	12.0			
8.0	83.4	12.0			
9.0	82.6	12.0			
10.0	81.9	12.0			
11.0	81.2	12.0	84.3	12.0	
12.0	80.4	12.0	83.6	12.0	
14.0	78.9	12.0	82.0	12.0	
16.0	77.4	12.0	80.5	12.0	
18.0	75.9	12.0	78.9	12.0	
20.0	74.4	12.0	77.4	12.0	
22.0	72.8	12.0	75.8	12.0	
24.0	71.2	12.0	74.2	12.0	
26.0	69.5	12.0	72.5	12.0	
28.0	67.9	12.0	70.9	12.0	
30.0	66.2	12.0	69.2	12.0	
32.0	64.3	11.7	67.2	11.9	
34.0	62.3	10.2	65.3	10.9	
36.0	60.2	8.5	63.3	9.9	
38.0	58.0	7.0	61.0	8.2	
40.0	55.8	5.6	58.8	6.7	
42.0	53.6	4.3	56.4	5.4	
44.0	51.2	3.2	54.0	4.2	
46.0	48.7	2.2	51.4	3.0	
48.0					
危険角度 (°)	48	49	49	49	65
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SC性能 50mブーム + 2m + 20mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
7.0	84.6	12.0			
8.0	84.0	12.0			
9.0	83.3	12.0			
10.0	82.7	12.0			
11.0	82.0	12.0			
12.0	81.3	12.0			
14.0	80.0	12.0	84.0	12.0	
16.0	78.6	12.0	82.6	12.0	
18.0	77.3	12.0	81.2	12.0	
20.0	75.9	12.0	79.8	12.0	
22.0	74.5	12.0	78.4	12.0	
24.0	73.0	12.0	76.9	12.0	
26.0	71.6	12.0	75.4	12.0	
28.0	70.1	12.0	73.9	12.0	
30.0	68.6	12.0	72.4	12.0	
32.0	67.1	12.0	70.6	11.1	
34.0	65.3	11.0	68.8	10.3	
36.0	63.4	9.7	67.0	9.5	
38.0	61.4	8.2	65.1	8.8	
40.0	59.4	6.8	63.2	8.2	
42.0	57.3	5.5	61.1	7.0	
44.0	55.2	4.4	58.9	5.7	
46.0	53.0	3.4	56.6	4.6	
48.0	50.7	2.4	54.3	3.6	
50.0					
危険角度 (°)	49	49	49	49.5	66
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SC性能 50mブーム + 2m + 25mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.4	10.0			
9.0	83.8	10.0			
10.0	83.2	10.0			
11.0	82.6	10.0			
12.0	82.0	10.0			
14.0	80.7	10.0			
16.0	79.5	10.0	84.2	10.0	
18.0	78.2	10.0	83.0	10.0	
20.0	76.9	10.0	81.7	10.0	
22.0	75.6	10.0	80.4	10.0	
24.0	74.3	10.0	79.0	10.0	
26.0	73.0	10.0	77.7	10.0	
28.0	71.6	10.0	76.4	10.0	
30.0	70.3	10.0	74.8	9.9	
32.0	68.9	10.0	73.2	9.4	
34.0	67.5	10.0	71.6	8.9	
36.0	65.8	9.4	70.0	8.5	
38.0	64.1	8.8	68.3	8.1	
40.0	62.3	7.8	66.6	7.8	
42.0	60.3	6.6	64.8	7.2	
44.0	58.4	5.4	62.9	6.7	
46.0	56.5	4.4	61.0	6.0	
48.0	54.4	3.5	58.9	4.9	
50.0	52.4	2.6	56.7	3.9	
52.0	50.3	1.8	54.5	3.0	
54.0					
56.0					
58.0					
危険角度 (°)	49	49	49	49.5	66
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SC性能 50mブーム + 2m + 30mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.9	8.5			
9.0	84.3	8.5			
10.0	83.8	8.5			
11.0	83.2	8.5			
12.0	82.6	8.5			
14.0	81.5	8.5			
16.0	80.3	8.5			
18.0	79.2	8.5	84.5	8.5	
20.0	78.0	8.5	83.3	8.5	
22.0	76.8	8.5	82.1	8.5	
24.0	75.6	8.5	80.9	8.5	
26.0	74.4	8.5	79.7	8.5	
28.0	73.2	8.5	78.4	8.5	
30.0	71.9	8.5	77.0	8.4	
32.0	70.7	8.5	75.6	8.0	
34.0	69.4	8.5	74.2	7.7	
36.0	68.0	8.1	72.7	7.3	
38.0	66.5	7.5	71.2	6.9	
40.0	65.0	7.1	69.7	6.5	
42.0	63.4	6.6	68.2	6.2	
44.0	61.9	6.2	66.6	6.0	
46.0	60.1	5.3	64.9	5.7	
48.0	58.2	4.4	63.2	5.5	
50.0	56.1	3.5	61.4	5.1	
52.0	54.1	2.7	59.4	4.2	
54.0	52.0	1.9	57.4	3.4	
56.0	49.9	1.3	55.1	2.6	
58.0					
60.0					
62.0					
危険角度 (°)	49	51	51	51	66
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SC性能 50mブーム + 2m + 35mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
9.0	84.7	7.0			
10.0	84.2	7.0			
11.0	83.7	7.0			
12.0	83.2	7.0			
14.0	82.1	7.0			
16.0	81.1	7.0			
18.0	80.0	7.0			
20.0	78.9	7.0	84.5	4.9	
22.0	77.9	7.0	83.2	4.6	
24.0	76.6	6.6	82.0	4.4	
26.0	75.4	6.1	80.7	4.2	
28.0	74.1	5.7	79.4	4.0	
30.0	72.9	5.3	78.1	3.8	
32.0	71.6	5.0	76.8	3.6	
34.0	70.3	4.7	75.4	3.4	
36.0	69.0	4.4	74.1	3.2	
38.0	67.7	4.2	72.7	3.0	
40.0	66.3	4.0	71.3	2.9	
42.0	64.9	3.8	69.9	2.7	
44.0	63.5	3.6	68.5	2.6	
46.0	62.0	3.4	67.0	2.5	
48.0	60.5	3.2	65.5	2.4	
50.0	59.0	3.0	64.0	2.3	
52.0	57.4	2.9	62.4	2.2	
54.0	55.8	2.7	60.8	2.1	
56.0	53.8	2.0	59.1	2.0	
58.0	51.9	1.4	57.4	1.9	
60.0					
62.0					
64.0					
66.0					
危険角度 (°)	50	52	53	53	66
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1



10.85m — 35m

スーパーラフィングジブ【50mブーム時】

SD性能 50mブーム + 2m + 10.85mSLジブ

オフセット	5°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
7.0	84.7	21.0								
8.0	83.9	21.0								
9.0	83.2	21.0								
10.0	82.4	21.0	84.2	21.0						
11.0	81.6	21.0	83.4	21.0						
12.0	80.9	21.0	82.7	21.0	84.9	21.0				
14.0	79.4	21.0	81.1	21.0	83.3	21.0	84.9	21.0		
16.0	77.9	21.0	79.5	21.0	81.7	21.0	83.1	21.0	84.2	19.8
18.0	76.4	21.0	77.9	21.0	80.1	21.0	81.2	19.8	82.2	18.7
20.0	74.9	21.0	76.3	21.0	78.1	20.0	79.2	18.6	80.1	17.7
22.0	72.9	20.0	74.3	19.6	76.2	18.3	77.2	17.4	78.0	16.8
24.0	70.9	18.4	72.4	17.8	74.2	16.7	75.2	16.0	75.8	15.7
26.0	68.9	16.4	70.4	16.0	72.1	15.3	73.2	14.8	73.6	14.6
28.0	66.7	13.7	68.3	14.5	70.1	14.1	71.1	13.7	71.4	13.5
30.0	64.5	11.3	66.1	12.1	68.0	13.0	68.9	12.6	69.1	12.6
32.0	62.2	9.2	63.8	9.9	65.6	10.9	66.7	11.5	66.7	11.7
34.0	59.9	7.3	61.5	8.0	63.2	8.9	64.2	9.4		
36.0	57.5	5.7	59.1	6.3	60.6	7.1	61.5	7.5		
38.0	55.1	4.2	56.7	4.8	58.0	5.5	58.8	5.8		
40.0	52.7	2.9	54.2	3.4	55.4	4.0	56.0	4.3		
42.0					52.6	2.7	53.1	2.9		
危険角度 (°)	51		52		52		52		65	
標準フック	24t		24t		24t		24t		24t	
フック質量 (t)	0.88		0.88		0.88		0.88		0.88	
巻掛本数	2		2		2		2		2	

SD性能 50mブーム + 2m + 15mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.8	12.0								
7.0	84.1	12.0								
8.0	83.4	12.0								
9.0	82.6	12.0								
10.0	81.9	12.0								
11.0	81.2	12.0	84.3	12.0						
12.0	80.4	12.0	83.6	12.0						
14.0	78.9	12.0	82.0	12.0						
16.0	77.4	12.0	80.5	12.0	83.4	12.0				
18.0	75.9	12.0	78.9	12.0	81.8	12.0	84.0	12.0		
20.0	74.4	12.0	77.4	12.0	80.2	12.0	82.3	12.0	83.8	12.0
22.0	72.8	12.0	75.8	12.0	78.5	12.0	80.5	12.0	81.9	12.0
24.0	71.2	12.0	74.2	12.0	76.8	12.0	78.7	12.0	79.9	12.0
26.0	69.5	12.0	72.5	12.0	75.1	12.0	76.9	12.0	77.9	12.0
28.0	67.9	12.0	70.9	12.0	73.4	12.0	75.1	12.0	75.9	12.0
30.0	66.2	12.0	69.2	12.0	71.7	12.0	73.0	11.8	73.8	11.6
32.0	64.1	10.2	67.2	11.9	69.6	11.3	70.9	11.0	71.6	10.8
34.0	62.0	8.4	65.1	9.9	67.6	10.5	68.8	10.2	69.4	10.1
36.0	59.9	6.8	63.0	8.2	65.4	9.3	66.6	9.5	67.1	9.4
38.0	57.7	5.3	60.8	6.6	63.0	7.7	64.3	8.3		
40.0	55.5	4.1	58.5	5.2	60.6	6.1	61.8	6.7		
42.0	53.3	2.9	56.1	3.9	58.2	4.8	59.2	5.3		
44.0			53.7	2.8	55.6	3.5	56.6	3.9		
46.0					53.0	2.4	53.8	2.7		
危険角度 (°)	51		52		52		52		65	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SD性能 50mブーム + 2m + 20mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
7.0	84.6	12.0								
8.0	84.0	12.0								
9.0	83.3	12.0								
10.0	82.7	12.0								
11.0	82.0	12.0								
12.0	81.3	12.0								
14.0	80.0	12.0	84.0	12.0						
16.0	78.6	12.0	82.6	12.0						
18.0	77.3	12.0	81.2	12.0	84.8	12.0				
20.0	75.9	12.0	79.8	12.0	83.3	12.0				
22.0	74.5	12.0	78.4	12.0	81.8	12.0	84.7	11.3		
24.0	73.0	12.0	76.9	12.0	80.3	12.0	82.9	11.0	84.7	9.9
26.0	71.6	12.0	75.4	12.0	78.6	11.9	81.2	10.7	82.8	9.9
28.0	70.1	12.0	73.9	12.0	76.9	11.4	79.4	10.5	80.9	9.7
30.0	68.6	12.0	72.4	12.0	75.2	11.0	77.6	10.1	79.0	9.6
32.0	67.0	11.5	70.6	11.1	73.5	10.4	75.8	9.6	77.1	9.2
34.0	65.0	9.6	68.8	10.3	71.7	9.7	73.9	9.2	75.0	8.8
36.0	63.1	8.0	67.0	9.5	69.8	9.0	71.9	8.7	72.7	8.5
38.0	61.1	6.6	65.0	8.3	67.8	8.4	69.8	8.2	70.5	8.1
40.0	59.0	5.3	62.9	6.8	65.8	7.8	67.6	7.6	68.1	7.6
42.0	57.0	4.1	60.7	5.5	63.6	6.7	65.4	7.1		
44.0	54.9	3.0	58.6	4.3	61.3	5.5	63.0	6.2		
46.0	52.7	2.0	56.3	3.3	58.9	4.3	60.5	4.9		
48.0			54.0	2.3	56.5	3.2	57.9	3.7		
50.0					54.0	2.2	55.1	2.6		
危険角度 (°)	51		52		52		52.5		66	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SD性能 50mブーム + 2m + 25mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
8.0	84.4	10.0								
9.0	83.8	10.0								
10.0	83.2	10.0								
11.0	82.6	10.0								
12.0	82.0	10.0								
14.0	80.7	10.0								
16.0	79.5	10.0	84.2	10.0						
18.0	78.2	10.0	83.0	10.0						
20.0	76.9	10.0	81.7	10.0						
22.0	75.6	10.0	80.4	10.0	84.5	10.0				
24.0	74.3	10.0	79.0	10.0	83.0	9.9				
26.0	73.0	10.0	77.7	10.0	81.5	9.5	84.9	8.4		
28.0	71.6	10.0	76.4	10.0	79.9	9.1	83.3	8.2		
30.0	70.3	10.0	74.8	9.9	78.3	8.8	81.6	8.0	83.7	7.2
32.0	68.9	10.0	73.2	9.4	76.8	8.5	80.0	7.8	81.8	7.1
34.0	67.5	10.0	71.6	8.9	75.2	8.2	78.3	7.6	79.9	7.1
36.0	65.7	9.1	70.0	8.5	73.4	7.9	76.5	7.5	78.0	7.0
38.0	63.8	7.6	68.3	8.1	71.7	7.7	74.6	7.2	75.9	6.9
40.0	61.9	6.3	66.6	7.8	69.9	7.4	72.7	6.9	73.9	6.6
42.0	59.9	5.1	64.7	6.9	68.1	6.9	70.7	6.6	71.7	6.4
44.0	58.0	4.0	62.6	5.7	66.2	6.4	68.7	6.3	69.4	6.1
46.0	56.1	3.1	60.6	4.6	64.3	6.0	66.6	5.9	67.1	5.8
48.0	54.1	2.2	58.5	3.6	62.1	4.9	64.5	5.5		
50.0	52.0	1.4	56.4	2.7	59.9	3.8	61.9	4.6		
52.0			54.2	1.9	57.5	2.9	59.2	3.5		
54.0					55.0	2.0	56.4	2.5		
56.0							53.5	1.6		
危険角度 (°)	51		52.5		53		53		66	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SD性能 50mブーム + 2m + 30mSLジブ

オフセット	0		15		30		45		60	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
8.0	84.9	8.5								
9.0	84.3	8.5								
10.0	83.8	8.5								
11.0	83.2	8.5								
12.0	82.6	8.5								
14.0	81.5	8.5								
16.0	80.3	8.5								
18.0	79.2	8.5	84.5	8.5						
20.0	78.0	8.5	83.3	8.5						
22.0	76.8	8.5	82.1	8.5						
24.0	75.6	8.5	80.9	8.5						
26.0	74.4	8.5	79.7	8.5	84.3	7.8				
28.0	73.2	8.5	78.4	8.5	82.9	7.5				
30.0	71.9	8.5	77.0	8.4	81.4	7.3				
32.0	70.7	8.5	75.6	8.0	80.0	7.0	83.5	5.9		
34.0	69.4	8.5	74.2	7.7	78.5	6.8	81.9	5.8	84.4	5.2
36.0	68.0	8.1	72.7	7.3	77.0	6.5	80.3	5.7	82.6	5.1
38.0	66.5	7.5	71.2	6.9	75.5	6.3	78.7	5.6	80.8	5.1
40.0	65.0	7.1	69.7	6.5	73.9	6.1	77.0	5.5	78.9	5.0
42.0	63.2	6.0	68.2	6.2	72.3	5.9	75.3	5.4	77.0	5.0
44.0	61.4	5.0	66.6	6.0	70.6	5.7	73.6	5.3	75.1	5.0
46.0	59.6	4.0	64.9	5.7	68.9	5.5	71.6	5.2	72.9	4.9
48.0	57.7	3.1	62.9	4.8	67.1	5.4	69.6	5.1	70.6	4.9
50.0	55.7	2.3	60.9	3.9	65.3	5.0	67.6	4.8	68.3	4.7
52.0	53.6	1.5	58.9	3.0	63.2	4.3	65.5	4.6		
54.0			56.8	2.2	60.9	3.4	63.3	4.3		
56.0			54.6	1.5	58.5	2.6	60.6	3.3		
58.0					56.1	1.8	57.9	2.4		
60.0							55.1	1.6		
危険角度 (°)	52		53		54		54		66	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	



10.85m — 35m

スーパーラフィングジブ【50mブーム時】

SE性能 50mブーム + 2m + 10.85mSLジブ

オフセット	5°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
7.0	84.7	21.0			
8.0	83.9	21.0			
9.0	83.2	21.0			
10.0	82.4	21.0	84.2	21.0	
11.0	81.6	21.0	83.4	21.0	
12.0	80.9	21.0	82.7	21.0	
14.0	79.4	21.0	81.1	21.0	
16.0	77.9	21.0	79.5	21.0	
18.0	76.4	21.0	77.9	21.0	
20.0	74.9	21.0	76.3	21.0	
22.0	72.9	19.4	74.3	19.6	
24.0	70.7	15.9	72.3	17.0	
26.0	68.5	12.9	70.1	13.9	
28.0	66.3	10.4	67.9	11.3	
30.0	64.0	8.2	65.7	9.0	
32.0	61.8	6.3	63.4	7.1	
34.0	59.4	4.6	61.1	5.3	
36.0	57.1	3.1	58.7	3.8	
38.0			57.7	3.0	
危険角度 (°)	55	57	57	57	65
標準フック	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
巻掛本数	2	2	2	2	2

SE性能 50mブーム + 2m + 15mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.8	12.0			
7.0	84.1	12.0			
8.0	83.4	12.0			
9.0	82.6	12.0			
10.0	81.9	12.0			
11.0	81.2	12.0	84.3	12.0	
12.0	80.4	12.0	83.6	12.0	
14.0	78.9	12.0	82.0	12.0	
16.0	77.4	12.0	80.5	12.0	
18.0	75.9	12.0	78.9	12.0	
20.0	74.4	12.0	77.4	12.0	
22.0	72.8	12.0	75.8	12.0	
24.0	71.2	12.0	74.2	12.0	
26.0	69.5	12.0	72.5	12.0	
28.0	67.8	11.4	70.9	12.0	
30.0	65.7	9.3	69.0	11.1	
32.0	63.6	7.4	66.8	9.0	
34.0	61.5	5.7	64.7	7.2	
36.0	59.4	4.2	62.6	5.6	
38.0	57.2	2.9	60.4	4.2	
40.0			58.1	2.9	
42.0				57.8	
危険角度 (°)	56	57	57	57	65
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SE性能 50mブーム + 2m + 20mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
7.0	84.6	12.0			
8.0	84.0	12.0			
9.0	83.3	12.0			
10.0	82.7	12.0			
11.0	82.0	12.0			
12.0	81.3	12.0			
14.0	80.0	12.0	84.0	12.0	
16.0	78.6	12.0	82.6	12.0	
18.0	77.3	12.0	81.2	12.0	
20.0	75.9	12.0	79.8	12.0	
22.0	74.5	12.0	78.4	12.0	
24.0	73.0	12.0	76.9	12.0	
26.0	71.6	12.0	75.4	12.0	
28.0	70.1	12.0	73.9	12.0	
30.0	68.4	10.5	72.4	12.0	
32.0	66.5	8.6	70.6	10.8	
34.0	64.5	6.9	68.6	8.9	
36.0	62.6	5.5	66.5	7.3	
38.0	60.5	4.1	64.5	5.8	
40.0	58.5	3.0	62.4	4.5	
42.0	56.5	1.9	60.3	3.3	
44.0			58.1	2.3	
46.0				56.5	
48.0				57.6	
危険角度 (°)	56	57	57	57	66
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SE性能 50mブーム + 2m + 25mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.4	10.0			
9.0	83.8	10.0			
10.0	83.2	10.0			
11.0	82.6	10.0			
12.0	82.0	10.0			
14.0	80.7	10.0			
16.0	79.5	10.0	84.2	10.0	
18.0	78.2	10.0	83.0	10.0	
20.0	76.9	10.0	81.7	10.0	
22.0	75.6	10.0	80.4	10.0	
24.0	74.3	10.0	79.0	10.0	
26.0	73.0	10.0	77.7	10.0	
28.0	71.6	10.0	76.4	10.0	
30.0	70.3	10.0	74.8	9.9	
32.0	68.8	9.6	73.2	9.4	
34.0	67.0	8.0	71.6	8.9	
36.0	65.1	6.5	70.0	8.5	
38.0	63.2	5.2	68.1	7.3	
40.0	61.2	4.0	66.1	6.0	
42.0	59.3	2.9	64.1	4.7	
44.0	57.5	2.0	62.1	3.6	
46.0			60.0	2.6	
48.0			58.0	1.7	
50.0				59.3	
52.0				58.7	
危険角度 (°)	56	57	58	58	66
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SE性能 50mブーム + 2m + 30mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.9	8.5			
9.0	84.3	8.5			
10.0	83.8	8.5			
11.0	83.2	8.5			
12.0	82.6	8.5			
14.0	81.5	8.5			
16.0	80.3	8.5			
18.0	79.2	8.5	84.5	8.5	
20.0	78.0	8.5	83.3	8.5	
22.0	76.8	8.5	82.1	8.5	
24.0	75.6	8.5	80.9	8.5	
26.0	74.4	8.5	79.7	8.5	
28.0	73.2	8.5	78.4	8.5	
30.0	71.9	8.5	77.0	8.4	
32.0	70.7	8.5	75.6	8.0	
34.0	69.4	8.5	74.2	7.7	
36.0	67.8	7.4	72.7	7.3	
38.0	66.0	6.1	71.2	6.9	
40.0	64.2	4.9	69.7	6.5	
42.0	62.5	3.8	68.1	6.0	
44.0	60.7	2.9	66.1	4.9	
46.0	58.8	2.0	64.2	3.9	
48.0			62.1	2.9	
50.0			60.2	2.1	
52.0			58.1	1.3	
54.0				60.2	
56.0				60.0	
危険角度 (°)	57	57	58	58	66
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SE性能 50mブーム + 2m + 35mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
9.0	84.7	7.0			
10.0	84.2	7.0			
11.0	83.7	7.0			
12.0	83.2	7.0			
14.0	82.1	7.0			
16.0	81.1	7.0			
18.0	80.0	7.0			
20.0	78.9	7.0	84.5	4.9	
22.0	77.9	7.0	83.2	4.6	
24.0	76.6	6.6	82.0	4.4	
26.0	75.4	6.1	80.7	4.2	
28.0	74.1	5.7	79.4	4.0	
30.0	72.9	5.3	78.1	3.8	
32.0	71.6	5.0	76.8	3.6	
34.0	70.3	4.7	75.4	3.4	
36.0	69.0	4.4	74.1	3.2	
38.0	67.7	4.2	72.7	3.0	
40.0	66.3	4.0	71.3	2.9	
42.0	64.9	3.8	69.9	2.7	
44.0	63.5	3.6	68.5	2.6	
46.0	61.7	2.8	67.0	2.5	
48.0	59.9	2.0	65.5	2.4	
50.0			64.0	2.3	
52.0			62.4	2.2	
54.0			60.4	1.6	
56.0				62.7	
58.0				60.8	
60.0				61.2	
危険角度 (°)	58.5	59	59	59	66
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1



オフセット	5'		15'		30'		45'		60'	
作業半径(m)	ブーム角度(°)	荷重 (ton)	ブーム角度(°)	荷重 (ton)	ブーム角度(°)	荷重 (ton)	ブーム角度(°)	荷重 (ton)	ブーム角度(°)	荷重 (ton)
7.0	84.7	21.0								
8.0	83.9	21.0								
9.0	83.2	21.0								
10.0	82.4	21.0	84.2	21.0						
11.0	81.6	21.0	83.4	21.0						
12.0	80.9	21.0	82.7	21.0	84.9	21.0				
14.0	79.4	21.0	81.1	21.0	83.3	21.0	84.9	21.0		
16.0	77.9	21.0	79.5	21.0	81.7	21.0	83.1	21.0	84.2	19.8
18.0	76.4	21.0	77.9	21.0	80.1	21.0	81.2	19.8	82.2	18.7
20.0	74.9	20.8	76.3	21.0	78.1	20.0	79.2	18.6	80.1	17.7
22.0	72.6	16.8	74.2	18.1	76.2	18.3	77.2	17.4	78.0	16.8
24.0	70.4	13.5	72.0	14.7	74.1	16.2	75.2	16.0	75.8	15.7
26.0	68.2	10.7	69.8	11.8	71.9	13.1	73.1	14.1	73.6	14.6
28.0	66.0	8.4	67.6	9.3	69.6	10.5	70.8	11.4	71.2	11.8
30.0	63.8	6.3	65.4	7.2	67.3	8.3	68.4	9.0	68.7	9.3
32.0	61.5	4.5	63.1	5.3	64.9	6.3	65.9	6.9	66.0	7.1
34.0	59.2	3.0	60.8	3.7	62.5	4.5	63.4	5.1		
36.0					60.1	3.0	60.8	3.4		
危険角度(°)	57		59		59		59		65	
標準フック	24t		24t		24t		24t		24t	
フック質量(t)	0.88		0.88		0.88		0.88		0.88	
索掛本数	2		2		2		2		2	

作業半径 (m)	0°	15°	30°	45°	60°
作業半径 (m)	boom角度 (°) : 荷重 (ton)	boom角度 (°) : 荷重 (ton)	boom角度 (°) : 荷重 (ton)	boom角度 (°) : 荷重 (ton)	boom角度 (°) : 荷重 (ton)
6.0	84.8 12.0				
7.0	84.1 12.0				
8.0	83.4 12.0				
9.0	82.6 12.0				
10.0	81.9 12.0				
11.0	81.2 12.0	84.3 12.0			
12.0	80.4 12.0	83.6 12.0			
14.0	78.9 12.0	82.0 12.0			
16.0	77.4 12.0	80.5 12.0	83.4 12.0		
18.0	75.9 12.0	78.9 12.0	81.8 12.0	84.0 12.0	
20.0	74.4 12.0	77.4 12.0	80.2 12.0	82.3 12.0	83.8 12.0
22.0	72.8 12.0	75.8 12.0	78.5 12.0	80.5 12.0	81.9 12.0
24.0	71.2 12.0	74.2 12.0	76.8 12.0	78.7 12.0	79.9 12.0
26.0	69.5 11.7	72.5 12.0	75.1 12.0	76.9 12.0	77.9 12.0
28.0	67.5 9.4	70.8 11.4	73.4 12.0	75.1 12.0	75.9 12.0
30.0	65.4 7.4	68.8 9.2	71.5 10.8	73.0 11.8	73.8 11.6
32.0	63.3 5.6	66.6 7.3	69.2 8.7	70.8 9.7	71.6 10.3
34.0	61.2 4.1	64.5 5.6	67.0 6.9	68.5 7.8	69.1 8.2
36.0	59.1 2.7	62.3 4.1	64.7 5.2	66.1 6.0	66.7 6.4
38.0		60.1 2.7	62.4 3.8	63.7 4.5	
40.0			60.0 2.5	61.2 3.0	
危険角度 (°)	58	59	59	59	65
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
牽掛本数	1	1	1	1	1

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ゲーム角度 (°) : 荷重 (ton)	ゲーム角度 (°) : 荷重 (ton)	ゲーム角度 (°) : 荷重 (ton)	ゲーム角度 (°) : 荷重 (ton)	ゲーム角度 (°) : 荷重 (ton)	ゲーム角度 (°) : 荷重 (ton)	ゲーム角度 (°) : 荷重 (ton)	ゲーム角度 (°) : 荷重 (ton)	ゲーム角度 (°) : 荷重 (ton)	ゲーム角度 (°) : 荷重 (ton)
7.0	84.6	12.0								
8.0	84.0	12.0								
9.0	83.3	12.0								
10.0	82.7	12.0								
11.0	82.0	12.0								
12.0	81.3	12.0								
14.0	80.0	12.0	84.0	12.0						
16.0	78.6	12.0	82.6	12.0						
18.0	77.3	12.0	81.2	12.0	84.8	12.0				
20.0	75.9	12.0	79.8	12.0	83.3	12.0				
22.0	74.5	12.0	78.4	12.0	81.8	12.0	84.7	11.3		
24.0	73.0	12.0	76.9	12.0	80.3	12.0	82.9	11.0	84.7	9.9
26.0	71.6	12.0	75.4	12.0	78.6	11.9	81.2	10.7	82.8	9.9
28.0	69.9	10.6	73.9	12.0	76.9	11.4	79.4	10.5	80.9	9.7
30.0	68.0	8.6	72.2	11.0	75.2	11.0	77.6	10.1	79.0	9.6
32.0	66.1	6.8	70.2	9.0	73.5	10.4	75.8	9.6	77.1	9.2
34.0	64.2	5.3	68.3	7.3	71.5	9.1	73.9	9.2	75.0	8.8
36.0	62.2	3.9	66.3	5.8	69.5	7.4	71.9	8.6	72.7	8.5
38.0	60.2	2.7	64.2	4.4	67.3	5.8	69.6	6.9	70.4	7.5
40.0	58.2	1.6	62.1	3.1	65.1	4.5	67.3	5.5	67.9	5.9
42.0					62.9	3.2	64.9	4.1		
44.0					60.6	2.1	62.5	2.8		
46.0							60.0	1.7		
危険角度 (°)	58		59		59		59		66	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
8.0	84.4	10.0								
9.0	83.8	10.0								
10.0	83.2	10.0								
11.0	82.6	10.0								
12.0	82.0	10.0								
14.0	80.7	10.0								
16.0	79.5	10.0	84.2	10.0						
18.0	78.2	10.0	83.0	10.0						
20.0	76.9	10.0	81.7	10.0						
22.0	75.6	10.0	80.4	10.0	84.5	10.0				
24.0	74.3	10.0	79.0	10.0	83.0	9.9				
26.0	73.0	10.0	77.7	10.0	81.5	9.5	84.9	8.4		
28.0	71.6	10.0	76.4	10.0	79.9	9.1	83.3	8.2		
30.0	70.2	9.7	74.8	9.9	78.3	8.8	81.6	8.0	83.7	7.2
32.0	68.4	7.9	73.2	9.4	76.8	8.5	80.0	7.8	81.8	7.1
34.0	66.6	6.3	71.6	8.8	75.2	8.2	78.3	7.6	79.9	7.1
36.0	64.7	5.0	69.7	7.2	73.4	7.9	76.5	7.5	78.0	7.0
38.0	62.8	3.7	67.7	5.8	71.7	7.7	74.6	7.2	75.9	6.9
40.0	60.9	2.6	65.7	4.6	69.7	6.3	72.7	6.9	73.9	6.6
42.0	59.0	1.6	63.8	3.4	67.6	5.0	70.7	6.3	71.7	6.4
44.0			61.7	2.4	65.5	3.8	68.4	5.0	69.3	5.6
46.0			59.7	1.4	63.4	2.8	66.1	3.8	66.8	4.2
48.0					61.2	1.8	63.6	2.7		
50.0							61.1	1.6		
危険角度 (°)	58		59		60		60		66	
標準フック	12t		12t		12t		12t		12t	
吊钩質量 (t)	0.42		0.42		0.42		0.42		0.42	
索掛本数	1		1		1		1		1	

オフセット	0	15	30	45	60
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
8.0	84.9	8.5			
9.0	84.3	8.5			
10.0	83.8	8.5			
11.0	83.2	8.5			
12.0	82.6	8.5			
14.0	81.5	8.5			
16.0	80.3	8.5			
18.0	79.2	8.5	84.5	8.5	
20.0	78.0	8.5	83.3	8.5	
22.0	76.8	8.5	82.1	8.5	
24.0	75.6	8.5	80.9	8.5	
26.0	74.4	8.5	79.7	8.5	84.3
28.0	73.2	8.5	78.4	8.5	82.9
30.0	71.9	8.5	77.0	8.4	81.4
32.0	70.7	8.5	75.6	8.0	7.0
34.0	69.1	7.3	74.2	7.7	78.5
36.0	67.3	5.9	72.7	7.3	77.0
38.0	65.6	4.6	71.2	6.9	75.5
40.0	63.8	3.5	69.4	5.8	73.9
42.0	62.0	2.5	67.6	4.7	72.3
44.0	60.2	1.6	65.6	3.6	70.5
46.0			63.7	2.6	68.4
48.0			61.7	1.8	66.3
50.0					64.2
52.0					62.0
54.0					62.3
危険角度 (°)	59	60	60	60	66
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数		1	1	1	1

オフセット	0	15	30	45	60
作業半径 (m)	ダーム角度 (°) 荷重 (ton)	ダーム角度 (°) 荷重 (ton)	ダーム角度 (°) 荷重 (ton)	ダーム角度 (°) 荷重 (ton)	ダーム角度 (°) 荷重 (ton)
9.0	84.7 7.0				
10.0	84.2 7.0				
11.0	83.7 7.0				
12.0	83.2 7.0				
14.0	82.1 7.0				
16.0	81.1 7.0				
18.0	80.0 7.0				
20.0	78.9 7.0	84.5 4.9			
22.0	77.9 7.0	83.2 4.6			
24.0	76.6 6.6	82.0 4.4			
26.0	75.4 6.1	80.7 4.2			
28.0	74.1 5.7	79.4 4.0	84.3 2.8		
30.0	72.9 5.3	78.1 3.8	82.9 2.7		
32.0	71.6 5.0	76.8 3.6	81.5 2.6		
34.0	70.3 4.7	75.4 3.4	80.1 2.5	84.3 1.9	
36.0	69.0 4.4	74.1 3.2	78.7 2.4	82.8 1.8	
38.0	67.7 4.2	72.7 3.0	77.2 2.3	81.3 1.8	83.8 1.5
40.0	66.3 4.0	71.3 2.9	75.8 2.2	79.7 1.7	82.1 1.4
42.0	64.7 3.3	69.9 2.7	74.3 2.1	78.1 1.7	80.4 1.4
44.0	62.9 2.4	68.5 2.6	72.7 2.0	76.5 1.6	78.7 1.4
46.0	61.1 1.6	67.0 2.5	71.2 1.9	74.8 1.6	76.9 1.4
48.0		65.5 2.4	69.6 1.9	73.1 1.5	75.1 1.4
50.0		63.8 2.0	68.0 1.8	71.4 1.5	73.1 1.4
52.0			66.3 1.7	69.6 1.5	70.9 1.3
54.0			64.5 1.7	67.6 1.4	68.7 1.3
56.0			62.6 1.3	65.5 1.4	66.2 1.3
58.0				63.4 1.4	
危険角度 (°)	60	62	62	62	66
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1



10.85m — 35m

スーパーラフィングジブ【50mブーム時】

SG性能 50mブーム + 2m + 10.85mSLジブ

オフセット	5°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
7.0	84.7	21.0								
8.0	83.9	21.0								
9.0	83.2	21.0								
10.0	82.4	21.0	84.2	21.0						
11.0	81.6	21.0	83.4	21.0						
12.0	80.9	21.0	82.7	21.0	84.9	21.0				
14.0	79.4	21.0	81.1	21.0	83.3	21.0	84.9	21.0		
16.0	77.9	21.0	79.5	21.0	81.7	21.0	83.1	21.0	84.2	19.8
18.0	76.4	21.0	77.9	21.0	80.1	21.0	81.2	19.8	82.2	18.7
20.0	74.5	17.9	76.1	19.4	78.1	20.0	79.2	18.6	80.1	17.7
22.0	72.3	14.2	73.9	15.5	76.0	17.3	77.2	17.4	78.0	16.8
24.0	70.1	11.2	71.7	12.3	73.8	13.9	75.1	15.0	75.8	15.7
26.0	68.0	8.6	69.5	9.6	71.6	11.0	72.8	12.0	73.4	12.5
28.0	65.7	6.4	67.3	7.3	69.3	8.5	70.5	9.4	70.9	9.8
30.0	63.5	4.5	65.1	5.3	67.0	6.4	68.1	7.1	68.4	7.4
32.0			62.9	3.6	64.6	4.5	65.6	5.2	65.8	5.4
危険角度 (°)	62		62		63		64		65	
標準フック	24t		24t		24t		24t		24t	
フック質量 (t)	0.88		0.88		0.88		0.88		0.88	
巻掛本数	2		2		2		2		2	

SG性能 50mブーム + 2m + 15mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.8	12.0								
7.0	84.1	12.0								
8.0	83.4	12.0								
9.0	82.6	12.0								
10.0	81.9	12.0								
11.0	81.2	12.0	84.3	12.0						
12.0	80.4	12.0	83.6	12.0						
14.0	78.9	12.0	82.0	12.0						
16.0	77.4	12.0	80.5	12.0	83.4	12.0				
18.0	75.9	12.0	78.9	12.0	81.8	12.0	84.0	12.0		
20.0	74.4	12.0	77.4	12.0	80.2	12.0	82.3	12.0	83.8	12.0
22.0	72.8	12.0	75.8	12.0	78.5	12.0	80.5	12.0	81.9	12.0
24.0	71.2	12.0	74.2	12.0	76.8	12.0	78.7	12.0	79.9	12.0
26.0	69.2	9.6	72.5	11.8	75.1	12.0	76.9	12.0	77.9	12.0
28.0	67.2	7.4	70.5	9.4	73.3	11.1	75.1	12.0	75.9	12.0
30.0	65.1	5.5	68.5	7.3	71.2	8.9	72.8	10.1	73.7	10.8
32.0	63.0	3.9	66.3	5.5	69.0	6.9	70.6	8.0	71.3	8.5
34.0			64.2	3.9	66.7	5.2	68.3	6.1	68.9	6.6
36.0					64.5	3.7	65.9	4.5	66.4	4.8
危険角度 (°)	62		63		63		64		65	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SG性能 50mブーム + 2m + 20mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
7.0	84.6	12.0								
8.0	84.0	12.0								
9.0	83.3	12.0								
10.0	82.7	12.0								
11.0	82.0	12.0								
12.0	81.3	12.0								
14.0	80.0	12.0	84.0	12.0						
16.0	78.6	12.0	82.6	12.0						
18.0	77.3	12.0	81.2	12.0	84.8	12.0				
20.0	75.9	12.0	79.8	12.0	83.3	12.0				
22.0	74.5	12.0	78.4	12.0	81.8	12.0	84.7	11.3		
24.0	73.0	12.0	76.9	12.0	80.3	12.0	82.9	11.0	84.7	9.9
26.0	71.4	10.8	75.4	12.0	78.6	11.9	81.2	10.7	82.8	9.9
28.0	69.6	8.6	73.8	11.2	76.9	11.4	79.4	10.5	80.9	9.7
30.0	67.7	6.7	71.9	9.1	75.2	11.0	77.6	10.1	79.0	9.6
32.0	65.8	5.1	69.9	7.3	73.3	9.2	75.8	9.6	77.1	9.2
34.0	63.9	3.6	67.9	5.6	71.2	7.4	73.8	8.8	75.0	8.8
36.0			65.9	4.2	69.2	5.8	71.6	7.0	72.6	7.8
38.0			63.9	2.9	67.0	4.4	69.3	5.5	70.2	6.1
40.0					64.9	3.1	67.1	4.1	67.7	4.5
42.0							64.7	2.8		
危険角度 (°)	62		63		63		64		66	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SG性能 50mブーム + 2m + 25mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
8.0	84.4	10.0								
9.0	83.8	10.0								
10.0	83.2	10.0								
11.0	82.6	10.0								
12.0	82.0	10.0								
14.0	80.7	10.0								
16.0	79.5	10.0	84.2	10.0						
18.0	78.2	10.0	83.0	10.0						
20.0	76.9	10.0	81.7	10.0						
22.0	75.6	10.0	80.4	10.0	84.5	10.0				
24.0	74.3	10.0	79.0	10.0	83.0	9.9				
26.0	73.0	10.0	77.7	10.0	81.5	9.5	84.9	8.4		
28.0	71.6	9.7	76.4	10.0	79.9	9.1	83.3	8.2		
30.0	69.8	7.8	74.8	9.9	78.3	8.8	81.6	8.0	83.7	7.2
32.0	68.0	6.1	73.1	8.8	76.8	8.5	80.0	7.8	81.8	7.1
34.0	66.2	4.7	71.2	7.1	75.2	8.2	78.3	7.6	79.9	7.1
36.0	64.3	3.4	69.3	5.7	73.4	7.7	76.5	7.5	78.0	7.0
38.0			67.4	4.4	71.4	6.2	74.6	7.2	75.9	6.9
40.0			65.4	3.2	69.3	4.9	72.6	6.3	73.9	6.6
42.0			63.4	2.1	67.3	3.7	70.3	4.9	71.6	5.7
44.0					65.2	2.6	68.0	3.7	69.1	4.3
46.0							65.7	2.6	66.5	3.0
危険角度 (°)	63		63		64		64		66	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SG性能 50mブーム + 2m + 30mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
8.0	84.9	8.5								
9.0	84.3	8.5								
10.0	83.8	8.5								
11.0	83.2	8.5								
12.0	82.6	8.5								
14.0	81.5	8.5								
16.0	80.3	8.5								
18.0	79.2	8.5	84.5	8.5						
20.0	78.0	8.5	83.3	8.5						
22.0	76.8	8.5	82.1	8.5						
24.0	75.6	8.5	80.9	8.5						
26.0	74.4	8.5	79.7	8.5	84.3	7.8				
28.0	73.2	8.5	78.4	8.5	82.9	7.5				
30.0	71.9	8.5	77.0	8.4	81.4	7.3				
32.0	70.3	7.1	75.6	8.0	80.0	7.0	83.5	5.9		
34.0	68.6	5.6	74.2	7.7	78.5	6.8	81.9	5.8	84.4	5.2
36.0	66.8	4.3	72.6	7.0	77.0	6.5	80.3	5.7	82.6	5.1
38.0			70.8	5.6	75.5	6.3	78.7	5.6	80.8	5.1
40.0			68.9	4.4	73.9	6.1	77.0	5.5	78.9	5.0
42.0			67.1	3.3	72.1	5.3	75.3	5.4	77.0	5.0
44.0					70.0	4.1	73.6	5.3	75.1	5.0
46.0					67.9	3.1	71.4	4.5	72.9	4.9
48.0							69.1	3.4	70.4	4.1
50.0							66.8	2.4	67.8	2.9
危険角度 (°)	65.5		66		66		66		66	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SG性能 50mブーム + 2m + 35mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
9.0	84.7	7.0								
10.0	84.2	7.0								
11.0	83.7	7.0								
12.0	83.2	7.0								
14.0	82.1	7.0								
16.0	81.1	7.0								
18.0	80.0	7.0								
20.0	78.9	7.0	84.5	4.9						
22.0	77.9	7.0	83.2	4.6						
24.0	76.6	6.6	82.0	4.4						
26.0	75.4	6.1	80.7	4.2						
28.0	74.1	5.7	79.4	4.0	84.3	2.8				
30.0	72.9	5.3	78.1	3.8	82.9	2.7				
32.0	71.6	5.0	76.8	3.6	81.5	2.6				
34.0	70.3	4.7	75.4	3.4	80.1	2.5	84.3	1.9		
36.0	69.0	4.4	74.1	3.2	78.7	2.4	82.8	1.8		
38.0	67.6	4.0	72.7	3.0	77.2	2.3	81.3	1.8	83.8	1.5
40.0		71.3	2.9	75.8	2.2	79.7	1.7	82.1	1.4	
42.0		69.9	2.7	74.3	2.1	78.1	1.7	80.4	1.4	
44.0		68.5	2.6	72.7	2.0	76.5	1.6	78.7	1.4	
46.0				71.2	1.9	74.8	1.6	76.9	1.4	
48.0				69.6	1.9	73.1	1.5	75.1	1.4	
50.0				68.0	1.8	71.4	1.5	73.1	1.4	
52.0						69.6	1.5	70.9	1.3	
54.0								68.7	1.3	
危険角度 (°)	66		67		67		68		68	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	



10.85m — 35m

スーパーラフィングジブ【50mブーム時】

SH性能 50mブーム + 2m + 10.85mSLジブ

オフセット	5°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
7.0	84.7 21.0				
8.0	83.9 21.0				
9.0	83.2 21.0				
10.0	82.4 21.0	84.2 21.0			
11.0	81.6 21.0	83.4 21.0			
12.0	80.9 21.0	82.7 21.0	84.9 21.0		
14.0	79.4 21.0	81.1 21.0	83.3 21.0	84.9 21.0	
16.0	77.9 21.0	79.5 21.0	81.7 21.0	83.1 21.0	84.2 19.8
18.0	76.2 19.3	77.9 21.0	80.1 21.0	81.2 19.8	82.2 18.7
20.0	74.2 15.1	75.8 16.6	78.0 18.5	79.2 18.6	80.1 17.7
22.0	72.0 11.7	73.6 13.0	75.7 14.7	77.1 16.0	78.0 16.7
24.0	69.9 8.8	71.4 10.0	73.5 11.5	74.8 12.7	75.5 13.3
26.0	67.7 6.4	69.2 7.5	71.3 8.8	72.5 9.8	73.1 10.3
28.0			69.0 6.5	70.2 7.4	70.7 7.8
危険角度 (°)	66	68	68	68	69
標準フック	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
巻掛本数	2	2	2	2	2

SH性能 50mブーム + 2m + 15mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.8 12.0				
7.0	84.1 12.0				
8.0	83.4 12.0				
9.0	82.6 12.0				
10.0	81.9 12.0				
11.0	81.2 12.0	84.3 12.0			
12.0	80.4 12.0	83.6 12.0			
14.0	78.9 12.0	82.0 12.0			
16.0	77.4 12.0	80.5 12.0	83.4 12.0		
18.0	75.9 12.0	78.9 12.0	81.8 12.0	84.0 12.0	
20.0	74.4 12.0	77.4 12.0	80.2 12.0	82.3 12.0	83.8 12.0
22.0	72.8 12.0	75.8 12.0	78.5 12.0	80.5 12.0	81.9 12.0
24.0	70.9 9.8	74.2 12.0	76.8 12.0	78.7 12.0	79.9 12.0
26.0	68.9 7.4	72.2 9.6	75.1 11.5	76.9 12.0	77.9 12.0
28.0		70.3 7.4	73.0 9.1	74.8 10.3	75.8 11.0
30.0			70.9 7.0	72.6 8.2	73.5 8.8
32.0				70.4 6.2	71.1 6.8
危険角度 (°)	67	68.5	69	69	69
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SH性能 50mブーム + 2m + 20mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
7.0	84.6 12.0				
8.0	84.0 12.0				
9.0	83.3 12.0				
10.0	82.7 12.0				
11.0	82.0 12.0				
12.0	81.3 12.0				
14.0	80.0 12.0	84.0 12.0			
16.0	78.6 12.0	82.6 12.0			
18.0	77.3 12.0	81.2 12.0	84.8 12.0		
20.0	75.9 12.0	79.8 12.0	83.3 12.0		
22.0	74.5 12.0	78.4 12.0	81.8 12.0	84.7 11.3	
24.0	72.9 11.0	76.9 12.0	80.3 12.0	82.9 11.0	84.7 9.9
26.0	71.1 8.7	75.3 11.4	78.6 11.9	81.2 10.7	82.8 9.9
28.0	69.3 6.6	73.5 9.2	76.9 11.2	79.4 10.5	80.9 9.7
30.0		71.6 7.3	74.9 9.2	77.6 10.1	79.0 9.6
32.0		69.6 5.5	73.0 7.5	75.6 8.7	77.1 9.2
34.0			71.0 5.8	73.5 7.1	74.8 7.7
36.0				71.3 5.5	72.4 6.2
38.0					70.0 4.5
危険角度 (°)	67.5	68.5	69	69.5	69.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SH性能 50mブーム + 2m + 25mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.4 10.0				
9.0	83.8 10.0				
10.0	83.2 10.0				
11.0	82.6 10.0				
12.0	82.0 10.0				
14.0	80.7 10.0				
16.0	79.5 10.0	84.2 10.0			
18.0	78.2 10.0	83.0 10.0			
20.0	76.9 10.0	81.7 10.0			
22.0	75.6 10.0	80.4 10.0	84.5 10.0		
24.0	74.3 10.0	79.0 10.0	83.0 9.9		
26.0	72.9 9.7	77.7 10.0	81.5 9.5	84.9 8.4	
28.0	71.2 7.7	76.4 10.0	79.9 9.1	83.3 8.2	
30.0	69.4 5.9	74.5 8.7	78.3 8.8	81.6 8.0	83.7 7.2
32.0		72.7 7.1	76.8 8.5	80.0 7.8	81.8 7.1
34.0		70.8 5.5	75.0 7.5	78.3 7.6	79.9 7.1
36.0			73.0 6.2	76.5 7.5	78.0 7.0
38.0			71.0 4.7	74.4 6.2	75.9 6.9
40.0				72.2 4.8	73.7 5.6
42.0					71.2 4.2
危険角度 (°)	68	69	70	70	70
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SH性能 50mブーム + 2m + 30mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.9 8.5				
9.0	84.3 8.5				
10.0	83.8 8.5				
11.0	83.2 8.5				
12.0	82.6 8.5				
14.0	81.5 8.5				
16.0	80.3 8.5				
18.0	79.2 8.5	84.5 8.5			
20.0	78.0 8.5	83.3 8.5			
22.0	76.8 8.5	82.1 8.5			
24.0	75.6 8.5	80.9 8.5			
26.0	74.4 8.5	79.7 8.5	84.3 7.8		
28.0	73.2 8.5	78.4 8.5	82.9 7.5		
30.0	71.5 6.9	77.0 8.4	81.4 7.3		
32.0	69.8 5.3	75.6 8.0	80.0 7.0	83.5 5.9	
34.0		73.9 6.8	78.5 6.8	81.9 5.8	84.4 5.2
36.0		72.1 5.4	77.0 6.5	80.3 5.7	82.6 5.1
38.0			75.5 6.3	78.7 5.6	80.8 5.1
40.0			73.6 5.1	77.0 5.5	78.9 5.0
42.0				75.3 5.4	77.0 5.0
44.0				73.2 4.2	75.1 5.0
危険角度 (°)	68.5	70.5	72	72	73
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SH性能 50mブーム + 2m + 35mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
9.0	84.7 7.0				
10.0	84.2 7.0				
11.0	83.7 7.0				
12.0	83.2 7.0				
14.0	82.1 7.0				
16.0	81.1 7.0				
18.0	80.0 7.0				
20.0	78.9 7.0	84.5 4.9			
22.0	77.9 7.0	83.2 4.6			
24.0	76.6 6.6	82.0 4.4			
26.0	75.4 6.1	80.7 4.2			
28.0	74.1 5.7	79.4 4.0	84.3 2.8		
30.0	72.9 5.3	78.1 3.8	82.9 2.7		
32.0	71.6 5.0	76.8 3.6	81.5 2.6		
34.0		75.4 3.4	80.1 2.5	84.3 1.9	
36.0		74.1 3.2	78.7 2.4	82.8 1.8	
38.0		72.7 3.0	77.2 2.3	81.3 1.8	83.8 1.5
40.0			75.8 2.2	79.7 1.7	82.1 1.4
42.0			74.3 2.1	78.1 1.7	80.4 1.4
44.0			72.7 2.0	76.5 1.6	78.7 1.4
46.0				74.8 1.6	76.9 1.4
48.0				73.1 1.5	75.1 1.4
危険角度 (°)	70.5	71.5	72	72	73.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1



10.85m — 35m

スーパーラフィングジブ【50mブーム時】

SJ性能 50mブーム + 2m + 10.85mSLジブ

オフセット	5'	15'	30'	45'	60'
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
7.0	84.7 21.0				
8.0	83.9 21.0				
9.0	83.2 21.0				
10.0	82.4 21.0	84.2 21.0			
11.0	81.6 21.0	83.4 21.0			
12.0	80.9 21.0	82.7 21.0	84.9 21.0		
14.0	79.4 21.0	81.1 21.0	83.3 21.0	84.9 21.0	
16.0	77.8 20.1	79.5 21.0	81.7 21.0	83.1 21.0	84.2 19.8
18.0	75.8 15.0	77.5 16.8	79.8 19.1	81.2 19.8	82.2 18.7
20.0	73.8 11.1	75.4 12.6	77.5 14.7	79.0 16.0	78.0 16.8
22.0		73.2 9.3	75.3 11.1	76.7 12.3	77.5 13.0
24.0				74.5 9.4	75.1 9.9
危険角度 (°)	72	72	73.5	73.5	74
標準フック	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
巻掛本数	2	2	2	2	2

SJ性能 50mブーム + 2m + 15mSLジブ

オフセット	0'	15'	30'	45'	60'
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
6.0	84.8 12.0				
7.0	84.1 12.0				
8.0	83.4 12.0				
9.0	82.6 12.0				
10.0	81.9 12.0				
11.0	81.2 12.0	84.3 12.0			
12.0	80.4 12.0	83.6 12.0			
14.0	78.9 12.0	82.0 12.0			
16.0	77.4 12.0	80.5 12.0	83.4 12.0		
18.0	75.9 12.0	78.9 12.0	81.8 12.0	84.0 12.0	
20.0	74.3 11.8	77.4 12.0	80.2 12.0	82.3 12.0	83.8 12.0
22.0		75.7 11.6	78.5 12.0	80.5 12.0	81.9 12.0
24.0		73.8 8.7	76.7 10.8	78.7 12.0	79.9 12.0
26.0			74.7 8.4	76.6 9.7	77.8 10.5
28.0				74.5 7.5	75.5 8.2
危険角度 (°)	72.5	72.5	73.5	73.5	74
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SJ性能 50mブーム + 2m + 20mSLジブ

オフセット	0'	15'	30'	45'	60'
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
7.0	84.6 12.0				
8.0	84.0 12.0				
9.0	83.3 12.0				
10.0	82.7 12.0				
11.0	82.0 12.0				
12.0	81.3 12.0				
14.0	80.0 12.0	84.0 12.0			
16.0	78.6 12.0	82.6 12.0			
18.0	77.3 12.0	81.2 12.0	84.8 12.0		
20.0	75.9 12.0	79.8 12.0	83.3 12.0		
22.0	74.2 9.9	78.4 12.0	81.8 12.0	84.7 11.3	
24.0		76.7 10.6	80.3 12.0	82.9 11.0	84.7 9.9
26.0		74.9 8.1	78.4 10.5	81.2 10.7	82.8 9.9
28.0			76.5 8.4	79.3 9.9	80.9 9.7
30.0			74.5 6.5	77.3 8.0	78.9 8.9
32.0				75.2 6.3	76.7 7.1
危険角度 (°)	73	73.5	73.5	73.5	74.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SJ性能 50mブーム + 2m + 25mSLジブ

オフセット	0'	15'	30'	45'	60'
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.4 10.0				
9.0	83.8 10.0				
10.0	83.2 10.0				
11.0	82.6 10.0				
12.0	82.0 10.0				
14.0	80.7 10.0				
16.0	79.5 10.0	84.2 10.0			
18.0	78.2 10.0	83.0 10.0			
20.0	76.9 10.0	81.7 10.0			
22.0	75.6 10.0	80.4 10.0	84.5 10.0		
24.0	74.0 8.3	79.0 10.0	83.0 9.9		
26.0		77.6 9.7	81.5 9.5	84.9 8.4	
28.0		75.8 7.6	79.9 9.1	83.3 8.2	
30.0			78.2 8.2	81.6 8.0	83.7 7.2
32.0			76.3 6.7	80.0 7.8	81.8 7.1
34.0				78.0 6.7	79.9 7.1
36.0				75.9 5.4	77.8 6.3
38.0					75.5 5.0
危険角度 (°)	73	74	74.5	74.5	74.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SJ性能 50mブーム + 2m + 30mSLジブ

オフセット	0'	15'	30'	45'	60'
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.9 8.5				
9.0	84.3 8.5				
10.0	83.8 8.5				
11.0	83.2 8.5				
12.0	82.6 8.5				
14.0	81.5 8.5				
16.0	80.3 8.5				
18.0	79.2 8.5	84.5 8.5			
20.0	78.0 8.5	83.3 8.5			
22.0	76.8 8.5	82.1 8.5			
24.0	75.6 8.5	80.9 8.5			
26.0		79.7 8.5	84.3 7.8		
28.0		78.4 8.5	82.9 7.5		
30.0		76.7 7.1	81.4 7.3		
32.0			80.0 7.0	83.5 5.9	
34.0			78.5 6.7	81.9 5.8	84.4 5.2
36.0				80.3 5.7	82.6 5.1
38.0				78.7 5.6	80.8 5.1
40.0					78.9 5.0
危険角度 (°)	74.5	75	77	77	77
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SJ性能 50mブーム + 2m + 35mSLジブ

オフセット	0'	15'	30'	45'	60'
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
9.0	84.7 7.0				
10.0	84.2 7.0				
11.0	83.7 7.0				
12.0	83.2 7.0				
14.0	82.1 7.0				
16.0	81.1 7.0				
18.0	80.0 7.0				
20.0	78.9 7.0	84.5 4.9			
22.0	77.9 7.0	83.2 4.6			
24.0	76.6 6.6	82.0 4.4			
26.0	75.4 6.1	80.7 4.2			
28.0		79.4 4.0	84.3 2.8		
30.0		78.1 3.8	82.9 2.7		
32.0		76.8 3.6	81.5 2.6		
34.0			80.1 2.5	84.3 1.9	
36.0			78.7 2.4	82.8 1.8	
38.0				81.3 1.8	83.8 1.5
40.0				79.7 1.7	82.1 1.4
42.0				78.1 1.7	80.4 1.4
44.0					78.7 1.4
危険角度 (°)	74.5	75.5	77.5	77.5	77.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1



10.85m — 35m

スーパーラフィングジブ【50mブーム時】

SK性能 50mブーム + 2m + 10.85mSLジブ

オフセット	5°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
7.0	84.7	21.0								
8.0	83.9	21.0								
9.0	83.2	21.0								
10.0	82.4	21.0	84.2	21.0						
11.0	81.6	21.0	83.4	21.0						
12.0	80.9	21.0	82.7	21.0	84.9	21.0				
14.0	79.2	18.3	81.1	20.7	83.3	21.0	84.9	21.0		
16.0			79.0	14.9	81.4	17.7	83.0	19.6	84.2	19.8
18.0					79.2	12.8	80.7	14.5	81.8	15.5
危険角度 (°)	78		78		78		79		80	
標準フック	24t		24t		24t		24t		24t	
フック質量 (t)	0.88		0.88		0.88		0.88		0.88	
巻掛本数	2		2		2		2		2	

SK性能 50mブーム + 2m + 15mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
6.0	84.8	12.0								
7.0	84.1	12.0								
8.0	83.4	12.0								
9.0	82.6	12.0								
10.0	81.9	12.0								
11.0	81.2	12.0	84.3	12.0						
12.0	80.4	12.0	83.6	12.0						
14.0	78.9	12.0	82.0	12.0						
16.0			80.5	12.0	83.4	12.0				
18.0			78.9	12.0	81.8	12.0	84.0	12.0		
20.0					80.2	12.0	82.3	12.0	83.8	12.0
22.0							80.4	10.6	81.8	11.7
危険角度 (°)	78		78		78		79		80	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SK性能 50mブーム + 2m + 20mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
7.0	84.6	12.0								
8.0	84.0	12.0								
9.0	83.3	12.0								
10.0	82.7	12.0								
11.0	82.0	12.0								
12.0	81.3	12.0								
14.0	80.0	12.0	84.0	12.0						
16.0	78.6	12.0	82.6	12.0						
18.0			81.2	12.0	84.8	12.0				
20.0			79.7	11.3	83.3	12.0				
22.0					81.7	11.3	84.7	11.3		
24.0					79.8	8.8	82.9	10.6	84.7	9.9
26.0							80.8	8.4	82.7	9.5
危険角度 (°)	78		78		78		79		81	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SK性能 50mブーム + 2m + 25mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
8.0	84.4	10.0								
9.0	83.8	10.0								
10.0	83.2	10.0								
11.0	82.6	10.0								
12.0	82.0	10.0								
14.0	80.7	10.0								
16.0	79.5	10.0	84.2	10.0						
18.0			83.0	10.0						
20.0			81.7	10.0						
22.0			80.4	10.0						
24.0					83.0	9.9				
26.0					81.2	8.4	84.9	8.4		
28.0							83.3	8.2		
30.0							81.3	6.8	83.7	7.2
32.0									81.7	6.4
危険角度 (°)	78.5		79		79.5		79.5		81	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SK性能 50mブーム + 2m + 30mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
8.0	84.9	8.5								
9.0	84.3	8.5								
10.0	83.8	8.5								
11.0	83.2	8.5								
12.0	82.6	8.5								
14.0	81.5	8.5								
16.0	80.3	8.5								
18.0	79.2	8.5	84.5	8.5						
20.0			83.3	8.5						
22.0			82.1	8.5						
24.0			80.9	8.5						
26.0					84.3	7.8				
28.0					82.9	7.5				
30.0					81.2	6.5				
32.0							83.5	5.9		
34.0							81.9	5.7	84.4	5.2
36.0									82.6	5.1
危険角度 (°)	78.5		79.5		79.5		80		81	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	


SK性能 50mブーム + 2m + 35mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
9.0	84.7	7.0								
10.0	84.2	7.0								
11.0	83.7	7.0								
12.0	83.2	7.0								
14.0	82.1	7.0								
16.0	81.1	7.0								
18.0	80.0	7.0								
20.0			84.5	4.9						
22.0			83.2	4.6						
24.0			82.0	4.4						
26.0			80.7	4.2						
28.0					84.3	2.8				
30.0					82.9	2.7				
32.0					81.5	2.6				
34.0							84.3	1.9		
36.0							82.8	1.8		
38.0									83.8	1.5
40.0									82.1	1.4
危険角度 (°)	79		79.5		80.5		81.5		81.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	



スーパーラフティングジブ 作業範囲図【55mブーム時】

- | | | | | | |
|---|-----|------------|--------|------|-------------|
| Ⓐ | 55m | ブーム + 2m + | 10.85m | SLジブ | (オフセット 5°) |
| Ⓑ | 55m | ブーム + 2m + | 15m | SLジブ | (オフセット 0°) |
| Ⓒ | 55m | ブーム + 2m + | 20m | SLジブ | (オフセット 0°) |
| Ⓓ | 55m | ブーム + 2m + | 25m | SLジブ | (オフセット 0°) |
| Ⓔ | 55m | ブーム + 2m + | 30m | SLジブ | (オフセット 0°) |
| Ⓕ | 55m | ブーム + 2m + | 35m | SLジブ | (オフセット 0°) |
| Ⓖ | 55m | ブーム + 2m + | 10.85m | SLジブ | (オフセット 60°) |
| Ⓗ | 55m | ブーム + 2m + | 15m | SLジブ | (オフセット 60°) |
| Ⓘ | 55m | ブーム + 2m + | 20m | SLジブ | (オフセット 60°) |
| Ⓙ | 55m | ブーム + 2m + | 25m | SLジブ | (オフセット 60°) |
| Ⓚ | 55m | ブーム + 2m + | 30m | SLジブ | (オフセット 60°) |
| Ⓛ | 55m | ブーム + 2m + | 35m | SLジブ | (オフセット 60°) |

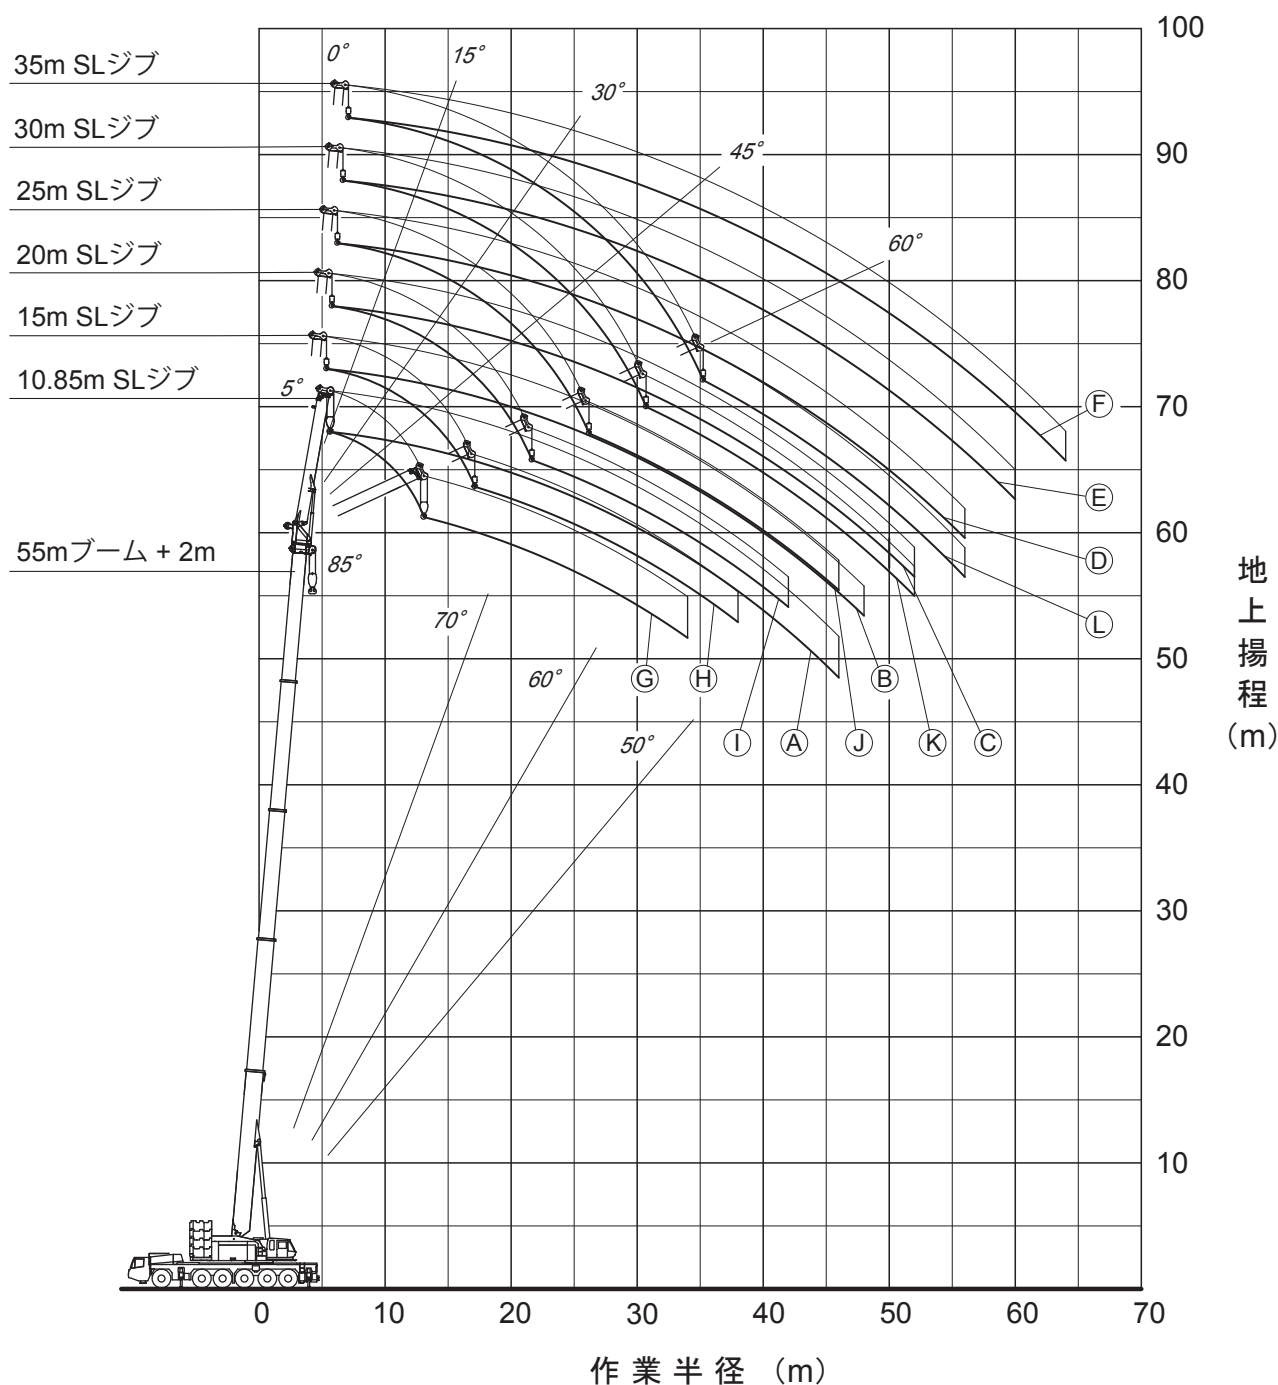

- 注1. 本図は、ブームおよびSLジブのたわみを含んでいません。
 2. SA性能時のものを示しています。



10.85m — 35m

スーパーラフィングジブ【55mブーム時】

SA性能 55mブーム + 2m + 10.85mSLジブ

オフセット	5°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.7 18.0				
9.0	84.0 18.0				
10.0	83.4 18.0				
11.0	82.7 18.0	84.3 18.0			
12.0	82.0 18.0	83.7 18.0			
14.0	80.7 18.0	82.3 18.0	84.3 18.0		
16.0	79.3 18.0	80.9 18.0	82.7 17.5	84.1 15.8	84.8 13.8
18.0	77.9 18.0	79.5 18.0	81.0 15.9	82.3 14.5	83.2 13.8
20.0	76.5 18.0	77.8 16.3	79.3 14.5	80.6 13.3	81.3 12.7
22.0	74.8 16.2	76.1 14.8	77.6 13.2	78.8 12.3	79.4 11.8
24.0	73.0 14.6	74.3 13.4	75.8 12.1	77.0 11.3	77.5 11.0
26.0	71.2 13.0	72.5 12.2	74.1 11.1	75.2 10.5	75.6 10.2
28.0	69.3 11.5	70.7 11.2	72.3 10.2	73.3 9.7	73.5 9.5
30.0	67.5 10.1	68.9 10.2	70.4 9.4	71.3 9.0	71.5 8.9
32.0	65.6 8.9	66.9 9.0	68.5 8.7	69.2 8.3	69.3 8.3
34.0	63.7 7.9	64.8 7.9	66.5 8.0	67.2 7.7	67.1 7.7
36.0	61.8 6.9	62.8 7.0	64.5 7.1	65.0 7.1	
38.0	59.8 6.0	60.7 6.1	62.4 6.2	62.9 6.2	
40.0	57.6 5.2	58.5 5.3	60.5 5.4	60.5 5.5	
42.0	55.5 4.5	56.3 4.6	58.6 4.7	58.2 4.7	
44.0	53.2 3.9	54.0 3.9	56.6 4.0	55.7 4.1	
46.0	50.8 3.3	51.6 3.3	54.4 3.4	53.1 3.4	
48.0		49.2 2.8	52.2 2.8		
危険角度 (°)	49	49	49	51	66
標準フック	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
巻掛本数	2	2	2	2	2

SA性能 55mブーム + 2m + 15mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
7.0	84.5 12.0				
8.0	83.8 12.0				
9.0	83.2 12.0				
10.0	82.6 12.0				
11.0	81.9 12.0				
12.0	81.3 12.0	84.4 12.0			
14.0	80.0 12.0	83.1 12.0			
16.0	78.7 12.0	81.8 12.0	84.4 12.0		
18.0	77.4 12.0	80.5 12.0	83.0 12.0		
20.0	76.0 12.0	79.1 12.0	81.6 12.0	83.5 11.6	84.7 10.2
22.0	74.7 12.0	77.8 12.0	80.0 11.8	81.8 10.8	83.0 10.2
24.0	73.3 12.0	76.4 12.0	78.4 10.9	80.1 10.0	81.2 9.5
26.0	71.9 12.0	74.8 11.2	76.7 10.0	78.4 9.3	79.4 8.9
28.0	70.2 11.8	73.1 10.3	75.1 9.2	76.6 8.6	77.5 8.3
30.0	68.5 10.6	71.4 9.4	73.4 8.5	74.8 8.0	75.6 7.8
32.0	66.8 9.4	69.7 8.6	71.6 7.9	73.0 7.4	73.7 7.3
34.0	65.1 8.3	68.0 8.0	69.9 7.3	71.1 6.9	71.7 6.8
36.0	63.3 7.4	66.3 7.3	68.0 6.8	69.2 6.5	69.7 6.4
38.0	61.5 6.5	64.5 6.7	66.2 6.3	67.2 6.0	67.6 6.0
40.0	59.6 5.7	62.5 5.9	64.2 5.8	65.1 5.6	
42.0	57.7 5.0	60.6 5.2	62.1 5.3	63.0 5.2	
44.0	55.7 4.4	58.6 4.5	60.0 4.7	60.8 4.7	
46.0	53.7 3.8	56.5 3.9	57.8 4.1	58.5 4.1	
48.0	51.6 3.2	54.3 3.4	55.6 3.5	56.1 3.5	
50.0		52.1 2.9	53.2 3.0	53.6 3.0	
52.0			50.7 2.5		
危険角度 (°)	49.5	50	50	51	66
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SA性能 55mブーム + 2m + 20mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.5 11.0				
9.0	84.0 11.0				
10.0	83.4 11.0				
11.0	82.8 11.0				
12.0	82.2 11.0				
14.0	81.1 11.0	84.7 11.0			
16.0	79.9 11.0	83.5 11.0			
18.0	78.6 11.0	82.3 11.0			
20.0	77.4 11.0	81.0 11.0	84.5 11.0		
22.0	76.1 11.0	79.7 11.0	83.0 10.3		
24.0	74.8 11.0	78.5 11.0	81.5 9.5	83.9 8.6	
26.0	73.5 11.0	76.9 10.0	79.9 8.8	82.3 8.0	83.9 7.5
28.0	72.0 10.8	75.4 9.2	78.4 8.1	80.6 7.4	82.2 7.1
30.0	70.5 9.8	73.9 8.4	76.8 7.5	78.9 6.9	80.4 6.6
32.0	69.0 8.9	72.3 7.8	75.2 7.0	77.2 6.5	78.6 6.2
34.0	67.5 8.1	70.7 7.1	73.6 6.5	75.4 6.0	76.7 5.8
36.0	65.9 7.4	69.1 6.6	71.9 6.0	73.7 5.6	74.8 5.5
38.0	64.3 6.8	67.5 6.1	70.1 5.6	71.8 5.2	72.9 5.1
40.0	62.6 6.0	65.8 5.6	68.3 5.1	70.0 4.9	70.8 4.8
42.0	60.8 5.3	64.0 5.1	66.5 4.8	68.1 4.6	68.7 4.5
44.0	59.0 4.7	62.2 4.7	64.7 4.4	66.1 4.2	
46.0	57.2 4.1	60.4 4.3	62.8 4.1	64.1 4.0	
48.0	55.2 3.5	58.5 3.8	60.8 3.8	62.0 3.7	
50.0	53.3 3.0	56.5 3.3	58.7 3.5	59.8 3.4	
52.0	51.2 2.6	54.4 2.8	56.5 3.0	57.4 3.0	
54.0		52.3 2.4	54.3 2.5	55.0 2.6	
56.0			52.0 2.1	52.5 2.1	
危険角度 (°)	49.5	51	51	51	67
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SA性能 55mブーム + 2m + 25mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
9.0	84.4 9.0				
10.0	83.9 9.0				
11.0	83.3 9.0				
12.0	82.7 9.0				
14.0	81.6 9.0				
16.0	80.5 9.0	84.9 9.0			
18.0	79.3 9.0	83.8 9.0			
20.0	78.2 9.0	82.6 9.0			
22.0	77.0 9.0	81.4 9.0			
24.0	75.8 9.0	80.2 9.0	84.1 8.5		
26.0	74.6 9.0	79.0 9.0	82.6 7.9		
28.0	73.4 9.0	77.6 8.4	81.2 7.3	84.1 6.6	
30.0	72.2 9.0	76.2 7.7	79.7 6.8	82.5 6.2	84.3 5.8
32.0	70.8 8.3	74.8 7.1	78.1 6.3	81.0 5.8	82.6 5.5
34.0	69.3 7.6	73.3 6.5	76.6 5.8	79.4 5.4	80.9 5.1
36.0	67.8 6.9	71.8 6.0	75.1 5.4	77.7 5.0	79.1 4.8
38.0	66.3 6.3	70.3 5.5	73.5 5.0	76.0 4.7	77.3 4.5
40.0	64.8 5.8	68.8 5.1	71.9 4.7	74.3 4.4	75.4 4.2
42.0	63.3 5.3	67.2 4.7	70.2 4.3	72.6 4.1	73.6 4.0
44.0	61.7 4.9	65.6 4.3	68.6 4.0	70.8 3.8	71.6 3.7
46.0	60.1 4.4	63.9 4.0	66.8 3.7	68.9 3.5	69.5 3.5
48.0	58.4 3.8	62.3 3.7	65.1 3.4	66.9 3.3	
50.0	56.6 3.3	60.5 3.4	63.3 3.2	64.9 3.0	
52.0	54.9 2.9	58.7 3.1	61.4 2.9	62.9 2.8	
54.0	53.0 2.5	56.8 2.7	59.4 2.7	60.7 2.6	
56.0	51.2 2.1	54.8 2.3	57.3 2.5	58.4 2.4	
58.0		52.8 2.0	55.1 2.1	56.0 2.2	
60.0			52.8 1.8	53.5 1.8	
危険角度 (°)	49.5	51	51	51	67.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SA性能 55mブーム + 2m + 30mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
9.0	84.8 8.0				
10.0	84.3 8.0				
11.0	83.8 8.0				
12.0	83.3 8.0				
14.0	82.3 8.0				
16.0	81.3 8.0				
18.0	80.2 8.0				
20.0	79.2 8.0	84.2 8.0			
22.0	78.2 8.0	83.1 8.0			
24.0	77.1 8.0	82.0 8.0			
26.0	76.1 8.0	80.9 8.0			
28.0	75.0 8.0	79.6 7.7	83.7 6.7		
30.0	73.9 8.0	78.3 7.1	82.3 6.2		
32.0	72.6 7.8	77.0 6.6	80.9 5.8	84.3 5.2	
34.0	71.2 7.1	75.7 6.0	79.5 5.3	82.8 4.9	
36.0	69.9 6.5	74.4 5.6	78.1 5.0	81.3 4.6	83.5 4.3
38.0	68.5 5.9	73.0 5.1	76.7 4.6	79.8 4.3	81.8 4.1
40.0	67.1 5.4	71.6 4.7	75.2 4.3	78.2 4.0	80.1 3.8
42.0	65.6 5.0	70.1 4.4	73.7 4.0	76.6 3.7	78.3 3.6
44.0	64.2 4.6	68.5 4.0	72.1 3.7	75.0 3.4	76.5 3.3
46.0	62.7 4.2	66.8 3.7	70.5 3.4	73.3 3.2	74.7 3.1
48.0	61.2 3.8	65.2 3.4	68.9 3.1	71.6 3.0	72.6 2.9
50.0	59.6 3.5	63.5 3.1	67.2 2.9	69.7 2.8	70.5 2.7
52.0	58.0 3.2	61.8 2.9	65.5 2.7	67.9 2.6	68.4 2.5
54.0	56.4 2.7	60.2 2.6	63.8 2.5	65.9 2.4	
56.0	54.7 2.4	58.5 2.4	62.0 2.3	63.9 2.2	
58.0	53.0 2.0	56.8 2.2	60.1 2.1	61.8 2.0	
60.0	51.2 1.7	55.0 2.0	58.2 1.9	59.6 1.9	
62.0		53.2 1.6	56.2 1.7	57.2 1.7	
64.0			54.1 1.5	54.8 1.5	
危険角度 (°)	49.5	51.5	52	52.5	67.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SA性能 55mブーム + 2m + 35mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)
10.0	84.7 6.5				
11.0	84.2 6.5				
12.0	83.7 6.5				
14.0	82.8 6.5				
16.0	81.9 6.5				
18.0	80.9 6.5				
20.0	80.0 6.5				
22.0	79.0 6.5	83.9 4.7			
24.0	78.0 6.5	82.8 4.4			
26.0	76.9 6.3	81.7 4.2			
28.0	75.8 5.9	80.5 4.0			
30.0	74.6 5.5	79.3 3.8	83.9 2.7		
32.0	73.4 5.2	78.1 3.7	82.7 2.6		
34.0	72.3 4.9	76.9 3.5	81.5 2.5	84.9 1.9	
36.0	71.1 4.6	75.7 3.3	80.2 2.4	83.5 1.8	
38.0	69.9 4.3	74.4 3.1	78.8 2.3	82.1 1.8	
40.0	68.7 4.1	73.2 3.0	77.5 2.2	80.7 1.7	83.6 1.4
42.0	67.4 3.9	71.9 2.8	76.1 2.1	79.3 1.7	82.0 1.4
44.0	66.1 3.8	70.6 2.7	74.7 2.0	77.8 1.6	80.4 1.4
46.0	64.8 3.6	69.2 2.6	73.3 2.0	76.3 1.6	78.7 1.4
48.0	63.5 3.4	67.9 2.5	71.8 1.9	74.8 1.5	76.9 1.4
50.0	62.1 3.2	66.5 2.4	70.3 1.8	73.2 1.5	75.1 1.3
52.0	60.7 3.0	65.1 2.3	68.8 1.8	71.6 1.5	73.2 1.3
54.0	59.2 2.8	63.6 2.2	67.3 1.7	69.9 1.4	71.2 1.3
56.0	57.7 2.5	62.2 2.1	65.7 1.7	68.2 1.4	69.2 1.3
58.0	56.1 2.2	60.6 2.0	64.0 1.6	66.4 1.4	
60.0	54.4 1.9	58.9 1.9	62.3 1.6	64.5 1.4	
62.0	52.8 1.6	57.2 1.7	60.6 1.5	62.6 1.4	
64.0	51.0 1.3	55.4 1.5	58.8 1.4	60.5 1.4	
66.0		53.6 1.3	56.9 1.3	58.4 1.3	
危険角度 (°)	49.5	52	55	56.5	67.5
標準フック	12t	12t	12t	12t	12t
フック質量(t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1



10.85m — 35m

スーパーラフィングジブ【55mブーム時】

SB性能 55mブーム + 2m + 10.85mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.7	18.0			
9.0	84.0	18.0			
10.0	83.4	18.0			
11.0	82.7	18.0	84.3	18.0	
12.0	82.0	18.0	83.7	18.0	
14.0	80.7	18.0	82.3	18.0	
16.0	79.3	18.0	80.9	18.0	
18.0	77.9	18.0	79.5	18.0	
20.0	76.5	18.0	77.8	16.3	79.3
22.0	74.8	16.2	76.1	14.8	77.6
24.0	73.0	14.6	74.3	13.4	75.8
26.0	71.2	13.0	72.5	12.2	74.1
28.0	69.3	11.5	70.7	11.2	72.3
30.0	67.5	10.1	68.9	10.2	70.4
32.0	65.6	8.9	66.9	9.0	68.5
34.0	63.7	7.9	64.8	7.9	66.5
36.0	61.8	6.9	62.8	7.0	64.5
38.0	59.8	6.0	60.7	6.1	62.4
40.0	57.6	5.2	58.5	5.3	60.5
42.0	55.5	4.5	56.3	4.6	58.6
44.0	53.0	3.3	54.0	3.8	56.6
46.0					
危険角度 (°)	51	52	52	52	66
標準フック	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
巻掛本数	2	2	2	2	2

SB性能 55mブーム + 2m + 15mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
7.0	84.5	12.0			
8.0	83.8	12.0			
9.0	83.2	12.0			
10.0	82.6	12.0			
11.0	81.9	12.0			
12.0	81.3	12.0	84.4	12.0	
14.0	80.0	12.0	83.1	12.0	
16.0	78.7	12.0	81.8	12.0	84.4
18.0	77.4	12.0	80.5	12.0	83.0
20.0	76.0	12.0	79.1	12.0	81.6
22.0	74.7	12.0	77.8	12.0	80.0
24.0	73.3	12.0	76.4	12.0	78.4
26.0	71.9	12.0	74.8	11.2	76.7
28.0	70.2	11.8	73.1	10.3	75.1
30.0	68.5	10.6	71.4	9.4	73.4
32.0	66.8	9.4	69.7	8.6	71.6
34.0	65.1	8.3	68.0	8.0	69.9
36.0	63.3	7.4	66.3	7.3	68.0
38.0	61.5	6.5	64.5	6.7	66.2
40.0	59.6	5.7	62.5	5.9	64.2
42.0	57.7	5.0	60.6	5.2	62.1
44.0	55.7	4.4	58.6	4.5	60.0
46.0	53.5	3.3	56.5	3.9	57.8
48.0			54.2	3.2	55.6
50.0					53.1
危険角度 (°)	51.5	52	52	52	66
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SB性能 55mブーム + 2m + 20mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.5	11.0			
9.0	84.0	11.0			
10.0	83.4	11.0			
11.0	82.8	11.0			
12.0	82.2	11.0			
14.0	81.1	11.0	84.7	11.0	
16.0	79.9	11.0	83.5	11.0	
18.0	78.6	11.0	82.3	11.0	
20.0	77.4	11.0	81.0	11.0	
22.0	76.1	11.0	79.7	11.0	83.0
24.0	74.8	11.0	78.5	11.0	81.5
26.0	73.5	11.0	76.9	10.0	79.9
28.0	72.0	10.8	75.4	9.2	78.4
30.0	70.5	9.8	73.9	8.4	76.8
32.0	69.0	8.9	72.3	7.8	75.2
34.0	67.5	8.1	70.7	7.1	73.6
36.0	65.9	7.4	69.1	6.6	71.9
38.0	64.3	6.8	67.5	6.1	70.1
40.0	62.6	6.0	65.8	5.6	68.3
42.0	60.8	5.3	64.0	5.1	66.5
44.0	59.0	4.7	62.2	4.7	64.7
46.0	57.2	4.1	60.4	4.3	62.8
48.0	55.2	3.4	58.5	3.8	60.8
50.0	53.1	2.5	56.5	3.3	58.7
52.0			54.4	2.7	56.5
54.0					54.3
危険角度 (°)	51.5	52.5	52.5	52.5	67
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SB性能 55mブーム + 2m + 25mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
9.0	84.4	9.0			
10.0	83.9	9.0			
11.0	83.3	9.0			
12.0	82.7	9.0			
14.0	81.6	9.0			
16.0	80.5	9.0	84.9	9.0	
18.0	79.3	9.0	83.8	9.0	
20.0	78.2	9.0	82.6	9.0	
22.0	77.0	9.0	81.4	9.0	
24.0	75.8	9.0	80.2	9.0	84.1
26.0	74.6	9.0	79.0	9.0	82.6
28.0	73.4	9.0	77.6	8.4	81.2
30.0	72.2	9.0	76.2	7.7	79.7
32.0	70.8	8.3	74.8	7.1	78.1
34.0	69.3	7.6	73.3	6.5	76.6
36.0	67.8	6.9	71.8	6.0	75.1
38.0	66.3	6.3	70.3	5.5	73.5
40.0	64.8	5.8	68.8	5.1	71.9
42.0	63.3	5.3	67.2	4.7	70.2
44.0	61.7	4.9	65.6	4.3	68.6
46.0	60.1	4.4	63.9	4.0	66.8
48.0	58.4	3.8	62.3	3.7	65.1
50.0	56.6	3.3	60.5	3.4	63.3
52.0	54.7	2.7	58.7	3.1	61.4
54.0	52.6	1.9	56.8	2.7	59.4
56.0			54.8	2.3	57.3
58.0					55.1
60.0					53.5
危険角度 (°)	51.5	53	53	53	67.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SB性能 55mブーム + 2m + 30mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.8	8.0			
10.0	84.3	8.0			
11.0	83.8	8.0			
12.0	83.3	8.0			
14.0	82.3	8.0			
16.0	81.3	8.0			
18.0	80.2	8.0			
20.0	79.2	8.0	84.2	8.0	
22.0	78.2	8.0	83.1	8.0	
24.0	77.1	8.0	82.0	8.0	
26.0	76.1	8.0	80.9	8.0	
28.0	75.0	8.0	79.6	7.7	83.7
30.0	73.9	8.0	78.3	7.1	82.3
32.0	72.6	7.8	77.0	6.6	80.9
34.0	71.2	7.1	75.7	6.0	79.5
36.0	69.9	6.5	74.4	5.6	78.1
38.0	68.5	5.9	73.0	5.1	76.7
40.0	67.1	5.4	71.6	4.7	75.2
42.0	65.6	5.0	70.1	4.4	73.7
44.0	64.2	4.6	68.5	4.0	72.1
46.0	62.7	4.2	66.8	3.7	70.5
48.0	61.2	3.8	65.2	3.4	68.9
50.0	59.6	3.5	63.5	3.1	67.2
52.0	58.0	3.2	61.8	2.9	65.5
54.0	56.4	2.7	60.2	2.6	63.8
56.0	54.5	2.0	58.5	2.4	62.0
58.0	52.5	1.3	56.8	2.2	60.1
60.0			55.0	1.9	58.2
62.0					56.2
64.0					54.1
危険角度 (°)	51.5	53.5	53.5	53.5	57.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SB性能 55mブーム + 2m + 35mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
10.0	84.7	6.5			
11.0	84.2	6.5			
12.0	83.7	6.5			
14.0	82.8	6.5			
16.0	81.9	6.5			
18.0	80.9	6.5			
20.0	80.0	6.5			
22.0	79.0	6.5	83.9	4.7	
24.0	78.0	6.5	82.8	4.4	
26.0	76.9	6.3	81.7	4.2	
28.0	75.8	5.9	80.5	4.0	
30.0	74.6	5.5	79.3	3.8	83.9
32.0	73.4	5.2	78.1	3.7	82.7
34.0	72.3	4.9	76.9	3.5	81.5
36.0	71.1	4.6	75.7	3.3	80.2
38.0	69.9	4.3	74.4	3.1	78.8
40.0	68.7	4.1	73.2	3.0	77.5
42.0	67.4	3.9	71.9	2.8	76.1
44.0	66.1	3.8	70.6	2.7	74.7
46.0	64.8	3.6	69.2	2.6	73.3
48.0	63.5	3.4	67.9	2.5	71.8
50.0	62.1	3.2	66.5	2.4	70.3
52.0	60.7	3.0	65.1	2.3	68.8
54.0	59.2	2.8	63.6	2.2	67.3
56.0	57.7	2.5	62.2	2.1	65.7
58.0	56.0	2.1	60.6	2.0	64.0
60.0	54.1	1.5	58.9	1.9	62.3
62.0			57.2	1.7	60.6
64.0			55.4	1.5	58.8
66.0					56.9
危険角度 (°)	52.5	53.5	55	56.5	67.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1



10.85m — 35m

スーパーラフィングジブ【55mブーム時】

SC性能 55mブーム + 2m + 10.85mSLジブ

オフセット	5°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
8.0	84.7 18.0				
9.0	84.0 18.0				
10.0	83.4 18.0				
11.0	82.7 18.0	84.3 18.0			
12.0	82.0 18.0	83.7 18.0			
14.0	80.7 18.0	82.3 18.0	84.3 18.0		
16.0	79.3 18.0	80.9 18.0	82.7 17.5	84.1 15.8	84.8 13.8
18.0	77.9 18.0	79.5 18.0	81.0 15.9	82.3 14.5	83.2 13.8
20.0	76.5 18.0	77.8 16.3	79.3 14.5	80.6 13.3	81.3 12.7
22.0	74.8 16.2	76.1 14.8	77.6 13.2	78.8 12.3	79.4 11.8
24.0	73.0 14.6	74.3 13.4	75.8 12.1	77.0 11.3	77.5 11.0
26.0	71.2 13.0	72.5 12.2	74.1 11.1	75.2 10.5	75.6 10.2
28.0	69.3 11.5	70.7 11.2	72.3 10.2	73.3 9.7	73.5 9.5
30.0	67.5 10.1	68.9 10.2	70.4 9.4	71.3 9.0	71.5 8.9
32.0	65.6 8.9	66.9 9.0	68.5 8.7	69.2 8.3	69.3 8.3
34.0	63.7 7.9	64.8 7.9	66.5 8.0	67.2 7.7	67.1 7.7
36.0	61.8 6.9	62.8 7.0	64.5 7.1	65.0 7.1	
38.0	59.7 5.7	60.7 6.1	62.4 6.2	62.9 6.2	
40.0	57.4 4.4	58.4 4.9	60.5 5.4	60.5 5.5	
42.0	55.1 3.1	56.1 3.6	58.3 4.2	58.1 4.5	
44.0			55.9 2.9	55.5 3.2	
危険角度 (°)	53	54	54	54	66
標準フック	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
巻掛本数	2	2	2	2	2

SC性能 55mブーム + 2m + 15mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
7.0	84.5 12.0				
8.0	83.8 12.0				
9.0	83.2 12.0				
10.0	82.6 12.0				
11.0	81.9 12.0				
12.0	81.3 12.0	84.4 12.0			
14.0	80.0 12.0	83.1 12.0			
16.0	78.7 12.0	81.8 12.0	84.4 12.0		
18.0	77.4 12.0	80.5 12.0	83.0 12.0		
20.0	76.0 12.0	79.1 12.0	81.6 12.0	83.5 11.6	84.7 10.2
22.0	74.7 12.0	77.8 12.0	80.0 11.8	81.8 10.8	83.0 10.2
24.0	73.3 12.0	76.4 12.0	78.4 10.9	80.1 10.0	81.2 9.5
26.0	71.9 12.0	74.8 11.2	76.7 10.0	78.4 9.3	79.4 8.9
28.0	70.2 11.8	73.1 10.3	75.1 9.2	76.6 8.6	77.5 8.3
30.0	68.5 10.6	71.4 9.4	73.4 8.5	74.8 8.0	75.6 7.8
32.0	66.8 9.4	69.7 8.6	71.6 7.9	73.0 7.4	73.7 7.3
34.0	65.1 8.3	68.0 8.0	69.9 7.3	71.1 6.9	71.7 6.8
36.0	63.3 7.4	66.3 7.3	68.0 6.8	69.2 6.5	69.7 6.4
38.0	61.5 6.5	64.5 6.7	66.2 6.3	67.2 6.0	67.6 6.0
40.0	59.5 5.4	62.5 5.9	64.2 5.8	65.1 5.6	
42.0	57.5 4.2	60.6 5.2	62.1 5.3	63.0 5.2	
44.0	55.3 3.0	58.4 4.1	60.0 4.7	60.8 4.7	
46.0		56.1 3.0	57.7 3.7	58.5 4.1	
48.0			55.3 2.6	56.0 2.9	
危険角度 (°)	53.5	54	54	54	66
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SC性能 55mブーム + 2m + 20mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
8.0	84.5 11.0				
9.0	84.0 11.0				
10.0	83.4 11.0				
11.0	82.8 11.0				
12.0	82.2 11.0				
14.0	81.1 11.0	84.7 11.0			
16.0	79.9 11.0	83.5 11.0			
18.0	78.6 11.0	82.3 11.0			
20.0	77.4 11.0	81.0 11.0	84.5 11.0		
22.0	76.1 11.0	79.7 11.0	83.0 10.3		
24.0	74.8 11.0	78.5 11.0	81.5 9.5	83.9 8.6	
26.0	73.5 11.0	76.9 10.0	79.9 8.8	82.3 8.0	83.9 7.5
28.0	72.0 10.8	75.4 9.2	78.4 8.1	80.6 7.4	82.2 7.1
30.0	70.5 9.8	73.9 8.4	76.8 7.5	78.9 6.9	80.4 6.6
32.0	69.0 8.9	72.3 7.8	75.2 7.0	77.2 6.5	78.6 6.2
34.0	67.5 8.1	70.7 7.1	73.6 6.5	75.4 6.0	76.7 5.8
36.0	65.9 7.4	69.1 6.6	71.9 6.0	73.7 5.6	74.8 5.5
38.0	64.3 6.8	67.5 6.1	70.1 5.6	71.8 5.2	72.9 5.1
40.0	62.6 6.0	65.8 5.6	68.3 5.1	70.0 4.9	70.8 4.8
42.0	60.8 5.3	64.0 5.1	66.5 4.8	68.1 4.6	68.7 4.5
44.0	58.9 4.2	62.2 4.7	64.7 4.4	66.1 4.2	
46.0	56.9 3.1	60.4 4.3	62.8 4.1	64.1 4.0	
48.0	54.8 2.2	58.3 3.4	60.8 3.8	62.0 3.7	
50.0		56.2 2.4	58.6 3.3	59.8 3.4	
52.0			56.3 2.4	57.4 2.8	
危険角度 (°)	53.5	54.5	54.5	55	67
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SC性能 55mブーム + 2m + 25mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
9.0	84.4 9.0				
10.0	83.9 9.0				
11.0	83.3 9.0				
12.0	82.7 9.0				
14.0	81.6 9.0				
16.0	80.5 9.0	84.9 9.0			
18.0	79.3 9.0	83.8 9.0			
20.0	78.2 9.0	82.6 9.0			
22.0	77.0 9.0	81.4 9.0			
24.0	75.8 9.0	80.2 9.0	84.1 8.5		
26.0	74.6 9.0	79.0 9.0	82.6 7.9		
28.0	73.4 9.0	77.6 8.4	81.2 7.3	84.1 6.6	
30.0	72.2 9.0	76.2 7.7	79.7 6.8	82.5 6.2	84.3 5.8
32.0	70.8 8.3	74.8 7.1	78.1 6.3	81.0 5.8	82.6 5.5
34.0	69.3 7.6	73.3 6.5	76.6 5.8	79.4 5.4	80.9 5.1
36.0	67.8 6.9	71.8 6.0	75.1 5.4	77.7 5.0	79.1 4.8
38.0	66.3 6.3	70.3 5.5	73.5 5.0	76.0 4.7	77.3 4.5
40.0	64.8 5.8	68.8 5.1	71.9 4.7	74.3 4.4	75.4 4.2
42.0	63.3 5.3	67.2 4.7	70.2 4.3	72.6 4.1	73.6 4.0
44.0	61.7 4.9	65.6 4.3	68.6 4.0	70.8 3.8	71.6 3.7
46.0	59.9 4.1	63.9 4.0	66.8 3.7	68.9 3.5	69.5 3.5
48.0	58.1 3.2	62.3 3.7	65.1 3.4	66.9 3.3	
50.0	56.1 2.3	60.5 3.4	63.3 3.2	64.9 3.0	
52.0		58.6 2.8	61.4 2.9	62.9 2.8	
54.0		56.5 2.0	59.4 2.7	60.7 2.6	
56.0			57.2 2.1	58.4 2.4	
58.0				55.9 1.8	
危険角度 (°)	54.5	55	55	55	67.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SC性能 55mブーム + 2m + 30mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)	ブーム角度 (°) : 荷重 (ton)
9.0	84.8 8.0				
10.0	84.3 8.0				
11.0	83.8 8.0				
12.0	83.3 8.0				
14.0	82.3 8.0				
16.0	81.3 8.0				
18.0	80.2 8.0				
20.0	79.2 8.0	84.2 8.0			
22.0	78.2 8.0	83.1 8.0			
24.0	77.1 8.0	82.0 8.0			
26.0	76.1 8.0	80.9 8.0			
28.0	75.0 8.0	79.6 7.7	83.7 6.7		
30.0	73.9 8.0	78.3 7.1	82.3 6.2		
32.0	72.6 7.8	77.0 6.6	80.9 5.8	84.3 5.2	
34.0	71.2 7.1	75.7 6.0	79.5 5.3	82.8 4.9	
36.0	69.9 6.5	74.4 5.6	78.1 5.0	81.3 4.6	83.5 4.3
38.0	68.5 5.9	73.0 5.1	76.7 4.6	79.8 4.3	81.8 4.1
40.0	67.1 5.4	71.6 4.7	75.2 4.3	78.2 4.0	80.1 3.8
42.0	65.6 5.0	70.1 4.4	73.7 4.0	76.6 3.7	78.3 3.6
44.0	64.2 4.6	68.5 4.0	72.1 3.7	75.0 3.4	76.5 3.3
46.0	62.7 4.2	66.8 3.7	70.5 3.4	73.3 3.2	74.7 3.1
48.0	61.2 3.8	65.2 3.4	68.9 3.1	71.6 3.0	72.6 2.9
50.0	59.5 3.2	63.5 3.1	67.2 2.9	69.7 2.8	70.5 2.7
52.0	57.6 2.3	61.8 2.9	65.5 2.7	67.9 2.6	68.4 2.5
54.0	55.8 1.6	60.2 2.6	63.8 2.5	65.9 2.4	
56.0		58.5 2.3	62.0 2.3	63.9 2.2	
58.0		56.5 1.6	60.1 2.1	61.8 2.0	
60.0			58.2 1.9	59.6 1.9	
62.0				57.2 1.7	
危険角度 (°)	54.5	55	56	56	67.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SC性能 55mブーム + 2m + 35mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
10.0	84.7	6.5								
11.0	84.2	6.5								
12.0	83.7	6.5								
14.0	82.8	6.5								
16.0	81.9	6.5								
18.0	80.9	6.5								
20.0	80.0	6.5								
22.0	79.0	6.5	83.9	4.7						
24.0	78.0	6.5	82.8	4.4						
26.0	76.9	6.3	81.7	4.2						
28.0	75.8	5.9	80.5	4.0						
30.0	74.6	5.5	79.3	3.8	83.9	2.7				
32.0	73.4	5.2	78.1	3.7	82.7	2.6				
34.0	72.3	4.9	76.9	3.5	81.5	2.5	84.9	1.9		
36.0	71.1	4.6	75.7	3.3	80.2	2.4	83.5	1.8		
38.0	69.9	4.3	74.4	3.1	78.8	2.3	82.1	1.8		
40.0	68.7	4.1	73.2	3.0	77.5	2.2	80.7	1.7	83.6	1.4
42.0	67.4	3.9	71.9	2.8	76.1	2.1	79.3	1.7	82.0	1.4
44.0	66.1	3.8	70.6	2.7	74.7	2.0	77.8	1.6	80.4	1.4
46.0	64.8	3.6	69.2	2.6	73.3	2.0	76.3	1.6	78.7	1.4
48.0	63.5	3.4	67.9	2.5	71.8	1.9	74.8	1.5	76.9	1.4
50.0	62.1	3.2	66.5	2.4	70.3	1.8	73.2	1.5	75.1	1.3
52.0	60.7	3.0	65.1	2.3	68.8	1.8	71.6	1.5	73.2	1.3
54.0	59.0	2.4	63.6	2.2	67.3	1.7	69.9	1.4	71.2	1.3
56.0	57.2	1.7	62.2	2.1	65.7	1.7	68.2	1.4	69.2	1.3
58.0			60.6	2.0	64.0	1.6	66.4	1.4		
60.0			58.9	1.9	62.3	1.6	64.5	1.4		
62.0			57.0	1.3	60.6	1.5	62.6	1.4		
64.0					58.8	1.4	60.5	1.4		
66.0							58.4	1.3		
危険角度 (°)	55.5		56		57		57		67.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
牽引本数	1		1		1		1		1	



10.85m — 35m

スーパーラフィングジブ【55mブーム時】

SD性能 55mブーム + 2m + 10.85mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.7	18.0			
9.0	84.0	18.0			
10.0	83.4	18.0			
11.0	82.7	18.0	84.3	18.0	
12.0	82.0	18.0	83.7	18.0	
14.0	80.7	18.0	82.3	18.0	
16.0	79.3	18.0	80.9	18.0	
18.0	77.9	18.0	79.5	18.0	
20.0	76.5	18.0	77.8	16.3	79.3
22.0	74.8	16.2	76.1	14.8	77.6
24.0	73.0	14.6	74.3	13.4	75.8
26.0	71.2	13.0	72.5	12.2	74.1
28.0	69.3	11.5	70.7	11.2	72.3
30.0	67.5	10.1	68.9	10.2	70.4
32.0	65.6	8.9	66.9	9.0	68.5
34.0	63.6	7.2	64.8	7.9	66.5
36.0	61.4	5.6	62.6	6.3	64.5
38.0	59.3	4.1	60.4	4.7	62.2
40.0	57.0	2.8	58.2	3.4	60.0
42.0					
危険角度 (°)	55	56	56	56	66
標準フック	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
巻掛本数	2	2	2	2	2

SD性能 55mブーム + 2m + 15mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
7.0	84.5	12.0			
8.0	83.8	12.0			
9.0	83.2	12.0			
10.0	82.6	12.0			
11.0	81.9	12.0			
12.0	81.3	12.0	84.4	12.0	
14.0	80.0	12.0	83.1	12.0	
16.0	78.7	12.0	81.8	12.0	84.4
18.0	77.4	12.0	80.5	12.0	83.0
20.0	76.0	12.0	79.1	12.0	81.6
22.0	74.7	12.0	77.8	12.0	80.0
24.0	73.3	12.0	76.4	12.0	78.4
26.0	71.9	12.0	74.8	11.2	76.7
28.0	70.2	11.8	73.1	10.3	75.1
30.0	68.5	10.6	71.4	9.4	73.4
32.0	66.8	9.4	69.7	8.6	71.6
34.0	65.1	8.3	68.0	8.0	69.9
36.0	63.1	6.6	66.3	7.3	68.0
38.0	61.2	5.2	64.4	6.5	66.2
40.0	59.2	3.9	62.3	5.1	64.2
42.0	57.1	2.7	60.1	3.8	62.0
44.0			57.9	2.7	59.8
46.0					57.4
危険角度 (°)	55	56	56	56	66
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SD性能 55mブーム + 2m + 20mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.5	11.0			
9.0	84.0	11.0			
10.0	83.4	11.0			
11.0	82.8	11.0			
12.0	82.2	11.0			
14.0	81.1	11.0	84.7	11.0	
16.0	79.9	11.0	83.5	11.0	
18.0	78.6	11.0	82.3	11.0	
20.0	77.4	11.0	81.0	11.0	
22.0	76.1	11.0	79.7	11.0	83.0
24.0	74.8	11.0	78.5	11.0	81.5
26.0	73.5	11.0	76.9	10.0	79.9
28.0	72.0	10.8	75.4	9.2	78.4
30.0	70.5	9.8	73.9	8.4	76.8
32.0	69.0	8.9	72.3	7.8	75.2
34.0	67.5	8.1	70.7	7.1	73.6
36.0	65.9	7.4	69.1	6.6	71.9
38.0	64.1	6.3	67.5	6.1	70.1
40.0	62.3	5.0	65.8	5.6	68.3
42.0	60.4	3.8	64.0	5.1	66.5
44.0	58.5	2.8	62.1	4.2	64.7
46.0	56.5	1.8	60.0	3.1	62.8
48.0			58.0	2.1	60.5
50.0					58.3
危険角度 (°)	55	56	56	57	67
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SD性能 55mブーム + 2m + 25mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
9.0	84.4	9.0			
10.0	83.9	9.0			
11.0	83.3	9.0			
12.0	82.7	9.0			
14.0	81.6	9.0			
16.0	80.5	9.0	84.9	9.0	
18.0	79.3	9.0	83.8	9.0	
20.0	78.2	9.0	82.6	9.0	
22.0	77.0	9.0	81.4	9.0	
24.0	75.8	9.0	80.2	9.0	84.1
26.0	74.6	9.0	79.0	9.0	82.6
28.0	73.4	9.0	77.6	8.4	81.2
30.0	72.2	9.0	76.2	7.7	79.7
32.0	70.8	8.3	74.8	7.1	78.1
34.0	69.3	7.6	73.3	6.5	76.6
36.0	67.8	6.9	71.8	6.0	75.1
38.0	66.3	6.3	70.3	5.5	73.5
40.0	64.8	5.8	68.8	5.1	71.9
42.0	63.1	4.8	67.2	4.7	70.2
44.0	61.3	3.8	65.6	4.3	68.6
46.0	59.4	2.8	63.9	4.0	66.8
48.0	57.5	1.9	62.2	3.4	65.1
50.0			60.2	2.5	63.3
52.0			58.1	1.7	61.4
54.0					59.1
56.0					58.1
危険角度 (°)	56	57	57	57	67.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SD性能 55mブーム + 2m + 30mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
9.0	84.8	8.0			
10.0	84.3	8.0			
11.0	83.8	8.0			
12.0	83.3	8.0			
14.0	82.3	8.0			
16.0	81.3	8.0			
18.0	80.2	8.0			
20.0	79.2	8.0	84.2	8.0	
22.0	78.2	8.0	83.1	8.0	
24.0	77.1	8.0	82.0	8.0	
26.0	76.1	8.0	80.9	8.0	
28.0	75.0	8.0	79.6	7.7	83.7
30.0	73.9	8.0	78.3	7.1	82.3
32.0	72.6	7.8	77.0	6.6	80.9
34.0	71.2	7.1	75.7	6.0	79.5
36.0	69.9	6.5	74.4	5.6	78.1
38.0	68.5	5.9	73.0	5.1	76.7
40.0	67.1	5.4	71.6	4.7	75.2
42.0	65.6	5.0	70.1	4.4	73.7
44.0	64.2	4.6	68.5	4.0	72.1
46.0	62.5	3.6	66.8	3.7	70.5
48.0	60.8	2.8	65.2	3.4	68.9
50.0	59.0	1.9	63.5	3.1	67.2
52.0			61.8	2.8	65.5
54.0			60.0	2.0	63.8
56.0					62.0
58.0					59.9
60.0					
危険角度 (°)	57.5	58.5	58.5	58.5	67.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SD性能 55mブーム + 2m + 35mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
10.0	84.7	6.5			
11.0	84.2	6.5			
12.0	83.7	6.5			
14.0	82.8	6.5			
16.0	81.9	6.5			
18.0	80.9	6.5			
20.0	80.0	6.5			
22.0	79.0	6.5	83.9	4.7	
24.0	78.0	6.5	82.8	4.4	
26.0	76.9	6.3	81.7	4.2	
28.0	75.8	5.9	80.5	4.0	
30.0	74.6	5.5	79.3	3.8	83.9
32.0	73.4	5.2	78.1	3.7	82.7
34.0	72.3	4.9	76.9	3.5	81.5
36.0	71.1	4.6	75.7	3.3	80.2
38.0	69.9	4.3	74.4	3.1	78.8
40.0	68.7	4.1	73.2	3.0	77.5
42.0	67.4	3.9	71.9	2.8	76.1
44.0	66.1	3.8	70.6	2.7	74.7
46.0	64.8	3.6	69.2	2.6	73.3
48.0	63.5	3.4	67.9	2.5	71.8
50.0	61.8	2.7	66.5	2.4	70.3
52.0	60.1	1.9	65.1	2.3	68.8
54.0			63.6	2.2	67.3
56.0			62.2	2.1	65.7
58.0			60.4	1.6	64.0
60.0					62.3
62.0					60.6
64.0					
危険角度 (°)	58.5	59	59	59	67.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1



10.85m — 35m

スーパーラフィングジブ【55mブーム時】

SE性能 55mブーム + 2m + 10.85mSLジブ

オフセット	5°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
8.0	84.7	18.0								
9.0	84.0	18.0								
10.0	83.4	18.0								
11.0	82.7	18.0	84.3	18.0						
12.0	82.0	18.0	83.7	18.0						
14.0	80.7	18.0	82.3	18.0	84.3	18.0				
16.0	79.3	18.0	80.9	18.0	82.7	17.5	84.1	15.8	84.8	13.8
18.0	77.9	18.0	79.5	18.0	81.0	15.9	82.3	14.5	83.2	13.8
20.0	76.5	18.0	77.8	16.3	79.3	14.5	80.6	13.3	81.3	12.7
22.0	74.8	16.2	76.1	14.8	77.6	13.2	78.8	12.3	79.4	11.8
24.0	73.0	14.6	74.3	13.4	75.8	12.1	77.0	11.3	77.5	11.0
26.0	71.2	12.8	72.5	12.2	74.1	11.1	75.2	10.5	75.6	10.2
28.0	69.1	10.3	70.7	11.2	72.3	10.2	73.3	9.7	73.5	9.5
30.0	67.1	8.1	68.6	9.0	70.4	9.4	71.3	9.0	71.5	8.9
32.0	65.0	6.2	66.5	7.0	68.3	8.0	69.2	8.3	69.3	8.3
34.0	62.9	4.5	64.4	5.3	66.1	6.2	67.0	6.8	67.0	7.0
36.0	60.8	3.0	62.1	3.7	63.9	4.5	64.7	5.0		
38.0					61.6	3.1	62.3	3.5		
危険角度 (°)	59		60		60		60		66	
標準フック	24t		24t		24t		24t		24t	
フック質量 (t)	0.88		0.88		0.88		0.88		0.88	
巻掛本数	2		2		2		2		2	

SE性能 55mブーム + 2m + 15mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
7.0	84.5	12.0								
8.0	83.8	12.0								
9.0	83.2	12.0								
10.0	82.6	12.0								
11.0	81.9	12.0								
12.0	81.3	12.0	84.4	12.0						
14.0	80.0	12.0	83.1	12.0						
16.0	78.7	12.0	81.8	12.0	84.4	12.0				
18.0	77.4	12.0	80.5	12.0	83.0	12.0				
20.0	76.0	12.0	79.1	12.0	81.6	12.0	83.5	11.6	84.7	10.2
22.0	74.7	12.0	77.8	12.0	80.0	11.8	81.8	10.8	83.0	10.2
24.0	73.3	12.0	76.4	12.0	78.4	10.9	80.1	10.0	81.2	9.5
26.0	71.9	12.0	74.8	11.2	76.7	10.0	78.4	9.3	79.4	8.9
28.0	70.1	11.2	73.1	10.3	75.1	9.2	76.6	8.6	77.5	8.3
30.0	68.3	9.1	71.4	9.4	73.4	8.5	74.8	8.0	75.6	7.8
32.0	66.4	7.2	69.7	8.6	71.6	7.9	73.0	7.4	73.7	7.3
34.0	64.5	5.5	67.8	7.1	69.9	7.3	71.1	6.9	71.7	6.8
36.0	62.6	4.1	65.8	5.5	68.0	6.7	69.2	6.5	69.7	6.4
38.0	60.6	2.8	63.8	4.1	66.0	5.2	67.2	6.0	67.6	6.0
40.0			61.7	2.8	63.8	3.8	64.9	4.5		
42.0					61.6	2.6	62.6	3.1		
危険角度 (°)	59		60		60		60.5		66	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SE性能 55mブーム + 2m + 20mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
8.0	84.5	11.0								
9.0	84.0	11.0								
10.0	83.4	11.0								
11.0	82.8	11.0								
12.0	82.2	11.0								
14.0	81.1	11.0	84.7	11.0						
16.0	79.9	11.0	83.5	11.0						
18.0	78.6	11.0	82.3	11.0						
20.0	77.4	11.0	81.0	11.0	84.5	11.0				
22.0	76.1	11.0	79.7	11.0	83.0	10.3				
24.0	74.8	11.0	78.5	11.0	81.5	9.5	83.9	8.6		
26.0	73.5	11.0	76.9	10.0	79.9	8.8	82.3	8.0	83.9	7.5
28.0	72.0	10.8	75.4	9.2	78.4	8.1	80.6	7.4	82.2	7.1
30.0	70.5	9.8	73.9	8.4	76.8	7.5	78.9	6.9	80.4	6.6
32.0	68.9	8.3	72.3	7.8	75.2	7.0	77.2	6.5	78.6	6.2
34.0	67.1	6.7	70.7	7.1	73.6	6.5	75.4	6.0	76.7	5.8
36.0	65.3	5.2	69.1	6.6	71.9	6.0	73.7	5.6	74.8	5.5
38.0	63.5	3.9	67.4	5.7	70.1	5.6	71.8	5.2	72.9	5.1
40.0	61.7	2.7	65.5	4.4	68.3	5.1	70.0	4.9	70.8	4.8
42.0	59.8	1.7	63.5	3.2	66.4	4.5	68.1	4.6	68.7	4.5
44.0			61.4	2.1	64.3	3.3	66.1	4.1		
46.0					62.2	2.2	63.8	2.9		
48.0							61.3	1.8		
危険角度 (°)	59		60		60.5		61		67	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SE性能 55mブーム + 2m + 25mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
9.0	84.4	9.0								
10.0	83.9	9.0								
11.0	83.3	9.0								
12.0	82.7	9.0								
14.0	81.6	9.0								
16.0	80.5	9.0	84.9	9.0						
18.0	79.3	9.0	83.8	9.0						
20.0	78.2	9.0	82.6	9.0						
22.0	77.0	9.0	81.4	9.0						
24.0	75.8	9.0	80.2	9.0	84.1	8.5				
26.0	74.6	9.0	79.0	9.0	82.6	7.9				
28.0	73.4	9.0	77.6	8.4	81.2	7.3	84.1	6.6		
30.0	72.2	9.0	76.2	7.7	79.7	6.8	82.5	6.2	84.3	5.8
32.0	70.8	8.3	74.8	7.1	78.1	6.3	81.0	5.8	82.6	5.5
34.0	69.3	7.6	73.3	6.5	76.6	5.8	79.4	5.4	80.9	5.1
36.0	67.7	6.2	71.8	6.0	75.1	5.4	77.7	5.0	79.1	4.8
38.0	66.0	4.9	70.3	5.5	73.5	5.0	76.0	4.7	77.3	4.5
40.0	64.2	3.7	68.8	5.1	71.9	4.7	74.3	4.4	75.4	4.2
42.0	62.4	2.6	67.1	4.5	70.2	4.3	72.6	4.1	73.6	4.0
44.0	60.6	1.7	65.3	3.4	68.6	4.0	70.8	3.8	71.6	3.7
46.0			63.4	2.4	66.8	3.7	68.9	3.5	69.5	3.5
48.0			61.5	1.5	64.9	2.8	66.9	3.3		
50.0					62.8	1.9	64.8	2.7		
52.0							62.5	1.8		
危険角度 (°)	59		60		61		61		67.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SE性能 55mブーム + 2m + 30mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
9.0	84.8	8.0								
10.0	84.3	8.0								
11.0	83.8	8.0								
12.0	83.3	8.0								
14.0	82.3	8.0								
16.0	81.3	8.0								
18.0	80.2	8.0								
20.0	79.2	8.0	84.2	8.0						
22.0	78.2	8.0	83.1	8.0						
24.0	77.1	8.0	82.0	8.0						
26.0	76.1	8.0	80.9	8.0						
28.0	75.0	8.0	79.6	7.7	83.7	6.7				
30.0	73.9	8.0	78.3	7.1	82.3	6.2				
32.0	72.6	7.8	77.0	6.6	80.9	5.8	84.3	5.2		
34.0	71.2	7.1	75.7	6.0	79.5	5.3	82.8	4.9		
36.0	69.9	6.5	74.4	5.6	78.1	5.0	81.3	4.6	83.5	4.3
38.0	68.4	5.8	73.0	5.1	76.7	4.6	79.8	4.3	81.8	4.1
40.0	66.8	4.6	71.6	4.7	75.2	4.3	78.2	4.0	80.1	3.8
42.0	65.1	3.5	70.1	4.4	73.7	4.0	76.6	3.7	78.3	3.6
44.0	63.4	2.5	68.5	4.0	72.1	3.7	75.0	3.4	76.5	3.3
46.0	61.8	1.7	66.8	3.6	70.5	3.4	73.3	3.2	74.7	3.1
48.0			65.0	2.7	68.9	3.1	71.6	3.0	72.6	2.9
50.0			63.2	1.8	67.2	2.9	69.7	2.8	70.5	2.7
52.0					65.4	2.4	67.9	2.6	68.4	2.5
54.0					63.3	1.6	65.9	2.4		
56.0							63.8	1.7		
危険角度 (°)	60.5		61.5		61.5		61.5		67.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	



10.85m — 35m

スーパーラフィングジブ【55mブーム時】

SF性能 55mブーム + 2m + 10.85mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.7 18.0				
9.0	84.0 18.0				
10.0	83.4 18.0				
11.0	82.7 18.0	84.3 18.0			
12.0	82.0 18.0	83.7 18.0			
14.0	80.7 18.0	82.3 18.0	84.3 18.0		
16.0	79.3 18.0	80.9 18.0	82.7 17.5	84.1 15.8	84.8 13.8
18.0	77.9 18.0	79.5 18.0	81.0 15.9	82.3 14.5	83.2 13.8
20.0	76.5 18.0	77.8 16.3	79.3 14.5	80.6 13.3	81.3 12.7
22.0	74.8 16.2	76.1 14.8	77.6 13.2	78.8 12.3	79.4 11.8
24.0	72.8 13.4	74.3 13.4	75.8 12.1	77.0 11.3	77.5 11.0
26.0	70.8 10.7	72.4 11.7	74.1 11.1	75.2 10.5	75.6 10.2
28.0	68.8 8.3	70.4 9.3	72.3 10.2	73.3 9.7	73.5 9.5
30.0	66.8 6.2	68.3 7.1	70.2 8.2	71.3 9.0	71.5 8.9
32.0	64.7 4.5	66.2 5.3	68.0 6.3	69.0 7.0	69.2 7.3
34.0	62.6 2.9	64.0 3.6	65.7 4.5	66.7 5.1	66.8 5.4
36.0			63.5 3.0	64.4 3.5	
危険角度 (°)	61	62	62	63	66
標準フック	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
巻掛本数	2	2	2	2	2

SF性能 55mブーム + 2m + 15mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
7.0	84.5 12.0				
8.0	83.8 12.0				
9.0	83.2 12.0				
10.0	82.6 12.0				
11.0	81.9 12.0				
12.0	81.3 12.0	84.4 12.0			
14.0	80.0 12.0	83.1 12.0			
16.0	78.7 12.0	81.8 12.0	84.4 12.0		
18.0	77.4 12.0	80.5 12.0	83.0 12.0		
20.0	76.0 12.0	79.1 12.0	81.6 12.0	83.5 11.6	84.7 10.2
22.0	74.7 12.0	77.8 12.0	80.0 11.8	81.8 10.8	83.0 10.2
24.0	73.3 12.0	76.4 12.0	78.4 10.9	80.1 10.0	81.2 9.5
26.0	71.8 11.6	74.8 11.2	76.7 10.0	78.4 9.3	79.4 8.9
28.0	69.8 9.2	73.1 10.3	75.1 9.2	76.6 8.6	77.5 8.3
30.0	68.0 7.2	71.4 9.1	73.4 8.5	74.8 8.0	75.6 7.8
32.0	66.1 5.5	69.5 7.2	71.6 7.9	73.0 7.4	73.7 7.3
34.0	64.2 3.9	67.5 5.5	69.8 6.8	71.1 6.9	71.7 6.8
36.0	62.3 2.5	65.5 4.0	67.7 5.2	69.2 6.1	69.7 6.4
38.0		63.4 2.6	65.7 3.7	66.9 4.5	67.4 4.8
40.0			63.5 2.4	64.7 3.1	
危険角度 (°)	61	62	62	63	66
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SF性能 55mブーム + 2m + 20mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.5 11.0				
9.0	84.0 11.0				
10.0	83.4 11.0				
11.0	82.8 11.0				
12.0	82.2 11.0				
14.0	81.1 11.0	84.7 11.0			
16.0	79.9 11.0	83.5 11.0			
18.0	78.6 11.0	82.3 11.0			
20.0	77.4 11.0	81.0 11.0	84.5 11.0		
22.0	76.1 11.0	79.7 11.0	83.0 10.3		
24.0	74.8 11.0	78.5 11.0	81.5 9.5	83.9 8.6	
26.0	73.5 11.0	76.9 10.0	79.9 8.8	82.3 8.0	83.9 7.5
28.0	72.0 10.4	75.4 9.2	78.4 8.1	80.6 7.4	82.2 7.1
30.0	70.3 8.4	73.9 8.4	76.8 7.5	78.9 6.9	80.4 6.6
32.0	68.5 6.6	72.3 7.8	75.2 7.0	77.2 6.5	78.6 6.2
34.0	66.7 5.0	70.7 7.1	73.6 6.5	75.4 6.0	76.7 5.8
36.0	65.0 3.7	68.9 5.6	71.9 6.0	73.7 5.6	74.8 5.5
38.0	63.1 2.4	66.9 4.2	70.1 5.6	71.8 5.2	72.9 5.1
40.0		65.0 3.0	68.1 4.4	70.0 4.9	70.8 4.8
42.0		63.1 1.9	66.0 3.2	68.0 4.1	68.7 4.5
44.0			64.0 2.0	65.7 2.9	
46.0				63.4 1.7	
危険角度 (°)	61.5	62	62	63	67
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SF性能 55mブーム + 2m + 25mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
9.0	84.4 9.0				
10.0	83.9 9.0				
11.0	83.3 9.0				
12.0	82.7 9.0				
14.0	81.6 9.0				
16.0	80.5 9.0	84.9 9.0			
18.0	79.3 9.0	83.8 9.0			
20.0	78.2 9.0	82.6 9.0			
22.0	77.0 9.0	81.4 9.0			
24.0	75.8 9.0	80.2 9.0	84.1 8.5		
26.0	74.6 9.0	79.0 9.0	82.6 7.9		
28.0	73.4 9.0	77.6 8.4	81.2 7.3	84.1 6.6	
30.0	72.2 9.0	76.2 7.7	79.7 6.8	82.5 6.2	84.3 5.8
32.0	70.6 7.6	74.8 7.1	78.1 6.3	81.0 5.8	82.6 5.5
34.0	68.9 6.0	73.3 6.5	76.6 5.8	79.4 5.4	80.9 5.1
36.0	67.3 4.7	71.8 6.0	75.1 5.4	77.7 5.0	79.1 4.8
38.0	65.6 3.4	70.3 5.5	73.5 5.0	76.0 4.7	77.3 4.5
40.0	63.8 2.3	68.6 4.4	71.9 4.7	74.3 4.4	75.4 4.2
42.0		66.7 3.2	70.2 4.3	72.6 4.1	73.6 4.0
44.0		64.9 2.2	68.5 3.7	70.8 3.8	71.6 3.7
46.0			66.5 2.7	68.9 3.5	69.5 3.5
48.0			64.5 1.7	66.7 2.6	
危険角度 (°)	63	64	64	64.5	67.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SF性能 55mブーム + 2m + 30mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
9.0	84.8 8.0				
10.0	84.3 8.0				
11.0	83.8 8.0				
12.0	83.3 8.0				
14.0	82.3 8.0				
16.0	81.3 8.0				
18.0	80.2 8.0				
20.0	79.2 8.0	84.2 8.0			
22.0	78.2 8.0	83.1 8.0			
24.0	77.1 8.0	82.0 8.0			
26.0	76.1 8.0	80.9 8.0			
28.0	75.0 8.0	79.6 7.7	83.7 6.7		
30.0	73.9 8.0	78.3 7.1	82.3 6.2		
32.0	72.6 7.8	77.0 6.6	80.9 5.8	84.3 5.2	
34.0	71.2 6.9	75.7 6.0	79.5 5.3	82.8 4.9	
36.0	69.6 5.5	74.4 5.6	78.1 5.0	81.3 4.6	83.5 4.3
38.0	68.0 4.3	73.0 5.1	76.7 4.6	79.8 4.3	81.8 4.1
40.0	66.3 3.2	71.6 4.7	75.2 4.3	78.2 4.0	80.1 3.8
42.0	64.6 2.2	70.1 4.4	73.7 4.0	76.6 3.7	78.3 3.6
44.0		68.3 3.4	72.1 3.7	75.0 3.4	76.5 3.3
46.0		66.5 2.4	70.5 3.4	73.3 3.2	74.7 3.1
48.0			68.9 3.1	71.6 3.0	72.6 2.9
50.0			66.9 2.2	69.7 2.8	70.5 2.7
52.0				67.8 2.4	68.4 2.5
危険角度 (°)	63.5	65	65	66	67.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SF性能 55mブーム + 2m + 35mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
10.0	84.7 6.5				
11.0	84.2 6.5				
12.0	83.7 6.5				
14.0	82.8 6.5				
16.0	81.9 6.5				
18.0	80.9 6.5				
20.0	80.0 6.5				
22.0	79.0 6.5	83.9 4.7			
24.0	78.0 6.5	82.8 4.4			
26.0	76.9 6.3	81.7 4.2			
28.0	75.8 5.9	80.5 4.0			
30.0	74.6 5.5	79.3 3.8	83.9 2.7		
32.0	73.4 5.2	78.1 3.7	82.7 2.6		
34.0	72.3 4.9	76.9 3.5	81.5 2.5	84.9 1.9	
36.0	71.1 4.6	75.7 3.3	80.2 2.4	83.5 1.8	
38.0	69.9 4.3	74.4 3.1	78.8 2.3	82.1 1.8	
40.0	68.6 4.0	73.2 3.0	77.5 2.2	80.7 1.7	83.6 1.4
42.0	67.0 3.0	71.9 2.8	76.1 2.1	79.3 1.7	82.0 1.4
44.0		70.6 2.7	74.7 2.0	77.8 1.6	80.4 1.4
46.0		69.2 2.6	73.3 2.0	76.3 1.6	78.7 1.4
48.0		67.9 2.5	71.8 1.9	74.8 1.5	76.9 1.4
50.0			70.3 1.8	73.2 1.5	75.1 1.3
52.0			68.8 1.8	71.6 1.5	73.2 1.3
54.0				69.9 1.4	71.2 1.3
56.0				68.2 1.4	69.2 1.3
危険角度 (°)	65.5	66.5	67.5	67.5	67.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1



10.85m — 35m

スーパーラフィングジブ【55mブーム時】

SG性能 55mブーム + 2m + 10.85mSLジブ

オフセット	5°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
8.0	84.7	18.0								
9.0	84.0	18.0								
10.0	83.4	18.0								
11.0	82.7	18.0	84.3	18.0						
12.0	82.0	18.0	83.7	18.0						
14.0	80.7	18.0	82.3	18.0	84.3	18.0				
16.0	79.3	18.0	80.9	18.0	82.7	17.5	84.1	15.8	84.8	13.8
18.0	77.9	18.0	79.5	18.0	81.0	15.9	82.3	14.5	83.2	13.8
20.0	76.5	17.9	77.8	16.3	79.3	14.5	80.6	13.3	81.3	12.7
22.0	74.5	14.2	76.1	14.8	77.6	13.2	78.8	12.3	79.4	11.8
24.0	72.5	11.1	74.1	12.3	75.8	12.1	77.0	11.3	77.5	11.0
26.0	70.5	8.5	72.1	9.6	74.1	11.0	75.2	10.5	75.6	10.2
28.0	68.5	6.3	70.0	7.3	72.0	8.5	73.2	9.4	73.5	9.5
30.0			68.0	5.3	69.8	6.4	70.9	7.2	71.3	7.6
32.0					67.6	4.5	68.7	5.2	68.9	5.5
危険角度 (°)	67		67		67		67		67	
標準フック	24t		24t		24t		24t		24t	
フック質量 (t)	0.88		0.88		0.88		0.88		0.88	
巻掛本数	2		2		2		2		2	

SG性能 55mブーム + 2m + 15mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
7.0	84.5 12.0				
8.0	83.8 12.0				
9.0	83.2 12.0				
10.0	82.6 12.0				
11.0	81.9 12.0				
12.0	81.3 12.0	84.4 12.0			
14.0	80.0 12.0	83.1 12.0			
16.0	78.7 12.0	81.8 12.0	84.4 12.0		
18.0	77.4 12.0	80.5 12.0	83.0 12.0		
20.0	76.0 12.0	79.1 12.0	81.6 12.0	83.5 11.6	84.7 10.2
22.0	74.7 12.0	77.8 12.0	80.0 11.8	81.8 10.8	83.0 10.2
24.0	73.3 12.0	76.4 12.0	78.4 10.9	80.1 10.0	81.2 9.5
26.0	71.5 9.4	74.8 11.2	76.7 10.0	78.4 9.3	79.4 8.9
28.0	69.5 7.2	72.9 9.3	75.1 9.2	76.6 8.6	77.5 8.3
30.0	67.7 5.4	71.0 7.2	73.4 8.5	74.8 8.0	75.6 7.8
32.0		69.1 5.4	71.4 6.9	73.0 7.4	73.7 7.3
34.0			69.4 5.2	71.0 6.2	71.7 6.7
36.0				68.9 4.5	69.4 4.9
危険角度 (°)	67	67.5	67.5	67.5	68
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SG性能 55mブーム + 2m + 20mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.5	11.0								
9.0	84.0	11.0								
10.0	83.4	11.0								
11.0	82.8	11.0								
12.0	82.2	11.0								
14.0	81.1	11.0	84.7	11.0						
16.0	79.9	11.0	83.5	11.0						
18.0	78.6	11.0	82.3	11.0						
20.0	77.4	11.0	81.0	11.0	84.5	11.0				
22.0	76.1	11.0	79.7	11.0	83.0	10.3				
24.0	74.8	11.0	78.5	11.0	81.5	9.5	83.9	8.6		
26.0	73.5	10.6	76.9	10.0	79.9	8.8	82.3	8.0	83.9	7.5
28.0	71.6	8.4	75.4	9.2	78.4	8.1	80.6	7.4	82.2	7.1
30.0	69.9	6.5	73.9	8.4	76.8	7.5	78.9	6.9	80.4	6.6
32.0	68.2	4.9	72.2	7.1	75.2	7.0	77.2	6.5	78.6	6.2
34.0			70.3	5.5	73.6	6.5	75.4	6.0	76.7	5.8
36.0			68.4	4.0	71.8	5.7	73.7	5.6	74.8	5.5
38.0					69.8	4.3	71.8	5.2	72.9	5.1
40.0							69.8	4.0	70.8	4.6
危険角度 (°)	67		67.5		68		68		68.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SG性能 55mブーム + 2m + 25mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
9.0	84.4	9.0								
10.0	83.9	9.0								
11.0	83.3	9.0								
12.0	82.7	9.0								
14.0	81.6	9.0								
16.0	80.5	9.0	84.9	9.0						
18.0	79.3	9.0	83.8	9.0						
20.0	78.2	9.0	82.6	9.0						
22.0	77.0	9.0	81.4	9.0						
24.0	75.8	9.0	80.2	9.0	84.1	8.5				
26.0	74.6	9.0	79.0	9.0	82.6	7.9				
28.0	73.4	9.0	77.6	8.4	81.2	7.3	84.1	6.6		
30.0	71.9	7.5	76.2	7.7	79.7	6.8	82.5	6.2	84.3	5.8
32.0	70.2	5.9	74.8	7.1	78.1	6.3	81.0	5.8	82.6	5.5
34.0	68.6	4.4	73.3	6.5	76.6	5.8	79.4	5.4	80.9	5.1
36.0			71.7	5.5	75.1	5.4	77.7	5.0	79.1	4.8
38.0			69.9	4.1	73.5	5.0	76.0	4.7	77.3	4.5
40.0					71.9	4.7	74.3	4.4	75.4	4.2
42.0					70.0	3.6	72.6	4.1	73.6	4.0
44.0							70.7	3.7	71.6	3.7
46.0									69.5	3.1
危険角度 (°)	67		68.5		68.5		69		69	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SG性能 55mブーム + 2m + 30mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)
9.0	84.8 8.0				
10.0	84.3 8.0				
11.0	83.8 8.0				
12.0	83.3 8.0				
14.0	82.3 8.0				
16.0	81.3 8.0				
18.0	80.2 8.0				
20.0	79.2 8.0	84.2 8.0			
22.0	78.2 8.0	83.1 8.0			
24.0	77.1 8.0	82.0 8.0			
26.0	76.1 8.0	80.9 8.0			
28.0	75.0 8.0	79.6 7.7	83.7 6.7		
30.0	73.9 8.0	78.3 7.1	82.3 6.2		
32.0	72.3 6.7	77.0 6.6	80.9 5.8	84.3 5.2	
34.0	70.7 5.3	75.7 6.0	79.5 5.3	82.8 4.9	
36.0		74.4 5.6	78.1 5.0	81.3 4.6	83.5 4.3
38.0		73.0 5.1	76.7 4.6	79.8 4.3	81.8 4.1
40.0		71.5 4.2	75.2 4.3	78.2 4.0	80.1 3.8
42.0			73.7 4.0	76.6 3.7	78.3 3.6
44.0			72.1 3.7	75.0 3.4	76.5 3.3
46.0				73.3 3.2	74.7 3.1
48.0				71.6 3.0	72.6 2.9
危険角度 (°)	69.5	70	70.5	70.5	71
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SG性能 55mブーム + 2m + 35mSLジブ

オフセット	0	15	30	45	60
作業半径 (m)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)	ブーム角度 (°) 荷重 (ton)
10.0	84.7 6.5				
11.0	84.2 6.5				
12.0	83.7 6.5				
14.0	82.8 6.5				
16.0	81.9 6.5				
18.0	80.9 6.5				
20.0	80.0 6.5				
22.0	79.0 6.5	83.9 4.7			
24.0	78.0 6.5	82.8 4.4			
26.0	76.9 6.3	81.7 4.2			
28.0	75.8 5.9	80.5 4.0			
30.0	74.6 5.5	79.3 3.8	83.9 2.7		
32.0	73.4 5.2	78.1 3.7	82.7 2.6		
34.0	72.3 4.9	76.9 3.5	81.5 2.5	84.9 1.9	
36.0	71.1 4.6	75.7 3.3	80.2 2.4	83.5 1.8	
38.0		74.4 3.1	78.8 2.3	82.1 1.8	
40.0		73.2 3.0	77.5 2.2	80.7 1.7	83.6 1.4
42.0		71.9 2.8	76.1 2.1	79.3 1.7	82.0 1.4
44.0			74.7 2.0	77.8 1.6	80.4 1.4
46.0			73.3 2.0	76.3 1.6	78.7 1.4
48.0			71.8 1.9	74.8 1.5	76.9 1.4
50.0				73.2 1.5	75.1 1.3
52.0				71.6 1.5	73.2 1.3
危険角度 (°)	70	70.5	70.5	70.5	71.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1



10.85m — 35m

スーパーラフィングジブ【55mブーム時】

SH性能 55mブーム + 2m + 10.85mSLジブ

オフセット	5'		15'		30'		45'		60'	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
8.0	84.7	18.0								
9.0	84.0	18.0								
10.0	83.4	18.0								
11.0	82.7	18.0	84.3	18.0						
12.0	82.0	18.0	83.7	18.0						
14.0	80.7	18.0	82.3	18.0	84.3	18.0				
16.0	79.3	18.0	80.9	18.0	82.7	17.5	84.1	15.8	84.8	13.8
18.0	77.9	18.0	79.5	18.0	81.0	15.9	82.3	14.5	83.2	13.8
20.0	76.2	15.0	77.8	16.3	79.3	14.5	80.6	13.3	81.3	12.7
22.0	74.2	11.6	75.8	12.9	77.6	13.2	78.8	12.3	79.4	11.8
24.0	72.1	8.7	73.8	9.9	75.8	11.5	77.0	11.3	77.5	11.0
26.0					73.7	8.8	75.1	9.9	75.6	10.2
28.0							72.8	7.4	73.3	7.9
危険角度 (°)	71		72		72		72		72	
標準フック	24t		24t		24t		24t		24t	
フック質量 (t)	0.88		0.88		0.88		0.88		0.88	
巻掛本数	2		2		2		2		2	

SH性能 55mブーム + 2m + 15mSLジブ

オフセット	0	15	30	45	60
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
7.0	84.5	12.0			
8.0	83.8	12.0			
9.0	83.2	12.0			
10.0	82.6	12.0			
11.0	81.9	12.0			
12.0	81.3	12.0	84.4	12.0	
14.0	80.0	12.0	83.1	12.0	
16.0	78.7	12.0	81.8	12.0	84.4
18.0	77.4	12.0	80.5	12.0	83.0
20.0	76.0	12.0	79.1	12.0	81.6
22.0	74.7	12.0	77.8	12.0	80.0
24.0	72.9	9.6	76.4	12.0	78.4
26.0			74.5	9.5	76.7
28.0					75.0
30.0					
危険角度 (°)	72	73	73.5	73.5	74
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SH性能 55mブーム + 2m + 20mSLジブ

オフセット	0'		15'		30'		45'		60'	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
8.0	84.5	11.0								
9.0	84.0	11.0								
10.0	83.4	11.0								
11.0	82.8	11.0								
12.0	82.2	11.0								
14.0	81.1	11.0	84.7	11.0						
16.0	79.9	11.0	83.5	11.0						
18.0	78.6	11.0	82.3	11.0						
20.0	77.4	11.0	81.0	11.0	84.5	11.0				
22.0	76.1	11.0	79.7	11.0	83.0	10.3				
24.0	74.8	10.8	78.5	11.0	81.5	9.5	83.9	8.6		
26.0	73.1	8.4	76.9	10.0	79.9	8.8	82.3	8.0	83.9	7.5
28.0			75.4	9.1	78.4	8.1	80.6	7.4	82.2	7.1
30.0			73.6	7.1	76.8	7.5	78.9	6.9	80.4	6.6
32.0					75.2	7.0	77.2	6.5	78.6	6.2
34.0							75.4	6.0	76.7	5.8
危険角度 (°)	72		73		73.5		74		75	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SH性能 55mブーム + 2m + 25mSLジブ

オフセット	0'		15'		30'		45'		60'	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
9.0	84.4	9.0								
10.0	83.9	9.0								
11.0	83.3	9.0								
12.0	82.7	9.0								
14.0	81.6	9.0								
16.0	80.5	9.0	84.9	9.0						
18.0	79.3	9.0	83.8	9.0						
20.0	78.2	9.0	82.6	9.0						
22.0	77.0	9.0	81.4	9.0						
24.0	75.8	9.0	80.2	9.0	84.1	8.5				
26.0	74.6	9.0	79.0	9.0	82.6	7.9				
28.0	73.1	7.4	77.6	8.4	81.2	7.3	84.1	6.6		
30.0			76.2	7.7	79.7	6.8	82.5	6.2	84.3	5.8
32.0			74.7	6.8	78.1	6.3	81.0	5.8	82.6	5.5
34.0					76.6	5.8	79.4	5.4	80.9	5.1
36.0					75.1	5.4	77.7	5.0	79.1	4.8
38.0							76.0	4.7	77.3	4.5
40.0									75.4	4.2
危険角度 (°)	72		73.5		73.5		74.5		75	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SH性能 55mブーム + 2m + 30mSLジブ

オフセット	0	15	30	45	60
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
9.0	84.8 8.0				
10.0	84.3 8.0				
11.0	83.8 8.0				
12.0	83.3 8.0				
14.0	82.3 8.0				
16.0	81.3 8.0				
18.0	80.2 8.0				
20.0	79.2 8.0	84.2 8.0			
22.0	78.2 8.0	83.1 8.0			
24.0	77.1 8.0	82.0 8.0			
26.0	76.1 8.0	80.9 8.0			
28.0	75.0 8.0	79.6 7.7	83.7 6.7		
30.0	73.5 6.5	78.3 7.1	82.3 6.2		
32.0		77.0 6.6	80.9 5.8	84.3 5.2	
34.0		75.7 6.0	79.5 5.3	82.8 4.9	
36.0			78.1 5.0	81.3 4.6	83.5 4.3
38.0			76.7 4.6	79.8 4.3	81.8 4.1
40.0				78.2 4.0	80.1 3.8
42.0				76.6 3.7	78.3 3.6
44.0					76.5 3.3
危険角度 (°)	72	74.5	75.5	75.5	75.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SH性能 55mブーム + 2m + 35mSLジブ

オフセット	0'		15'		30'		45'		60'	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
10.0	84.7	6.5								
11.0	84.2	6.5								
12.0	83.7	6.5								
14.0	82.8	6.5								
16.0	81.9	6.5								
18.0	80.9	6.5								
20.0	80.0	6.5								
22.0	79.0	6.5	83.9	4.7						
24.0	78.0	6.5	82.8	4.4						
26.0	76.9	6.3	81.7	4.2						
28.0	75.8	5.9	80.5	4.0						
30.0	74.6	5.5	79.3	3.8	83.9	2.7				
32.0			78.1	3.7	82.7	2.6				
34.0			76.9	3.5	81.5	2.5	84.9	1.9		
36.0			75.7	3.3	80.2	2.4	83.5	1.8		
38.0					78.8	2.3	82.1	1.8		
40.0					77.5	2.2	80.7	1.7	83.6	1.4
42.0					76.1	2.1	79.3	1.7	82.0	1.4
44.0							77.8	1.6	80.4	1.4
46.0							76.3	1.6	78.7	1.4
48.0									76.9	1.4
危険角度 (°)	73.5		74.5		75.5		75.5		75.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	



10.85m — 35m

スーパーラフィングジブ【55mブーム時】

SJ性能 55mブーム + 2m + 10.85mSLジブ

オフセット	5°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
8.0	84.7	18.0								
9.0	84.0	18.0								
10.0	83.4	18.0								
11.0	82.7	18.0	84.3	18.0						
12.0	82.0	18.0	83.7	18.0						
14.0	80.7	18.0	82.3	18.0	84.3	18.0				
16.0	79.3	18.0	80.9	18.0	82.7	17.5	84.1	15.8	84.8	13.8
18.0	77.5	14.3	79.3	16.1	81.0	15.9	82.3	14.5	83.2	13.8
20.0			77.3	12.1	79.3	14.2	80.6	13.3	81.3	12.7
22.0					77.2	10.6	78.8	12.1	79.4	11.8
24.0							76.7	9.0	77.3	9.8
危険角度 (°)	76		76		76		76		76	
標準フック	24t		24t		24t		24t		24t	
フック質量 (t)	0.88		0.88		0.88		0.88		0.88	
巻掛本数	2		2		2		2		2	

SJ性能 55mブーム + 2m + 15mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
7.0	84.5	12.0								
8.0	83.8	12.0								
9.0	83.2	12.0								
10.0	82.6	12.0								
11.0	81.9	12.0								
12.0	81.3	12.0	84.4	12.0						
14.0	80.0	12.0	83.1	12.0						
16.0	78.7	12.0	81.8	12.0	84.4	12.0				
18.0	77.4	12.0	80.5	12.0	83.0	12.0				
20.0			79.1	12.0	81.6	12.0	83.5	11.6	84.7	10.2
22.0			77.6	11.0	80.0	11.8	81.8	10.8	83.0	10.2
24.0					78.3	10.5	80.1	10.0	81.2	9.5
26.0							78.4	9.3	79.4	8.9
28.0									77.5	8.2
危険角度 (°)	76		76		76.5		76.5		76.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SJ性能 55mブーム + 2m + 20mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
8.0	84.5	11.0								
9.0	84.0	11.0								
10.0	83.4	11.0								
11.0	82.8	11.0								
12.0	82.2	11.0								
14.0	81.1	11.0	84.7	11.0						
16.0	79.9	11.0	83.5	11.0						
18.0	78.6	11.0	82.3	11.0						
20.0	77.4	11.0	81.0	11.0	84.5	11.0				
22.0			79.7	11.0	83.0	10.3				
24.0			78.3	10.0	81.5	9.5	83.9	8.6		
26.0			76.5	7.6	79.9	8.8	82.3	8.0	83.9	7.5
28.0					78.4	8.1	80.6	7.4	82.2	7.1
30.0							78.9	6.9	80.4	6.6
32.0									78.6	6.2
危険角度 (°)	76		76		77		77.5		77.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SJ性能 55mブーム + 2m + 25mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
9.0	84.4	9.0								
10.0	83.9	9.0								
11.0	83.3	9.0								
12.0	82.7	9.0								
14.0	81.6	9.0								
16.0	80.5	9.0	84.9	9.0						
18.0	79.3	9.0	83.8	9.0						
20.0	78.2	9.0	82.6	9.0						
22.0	77.0	9.0	81.4	9.0						
24.0			80.2	9.0	84.1	8.5				
26.0			79.0	9.0	82.6	7.9				
28.0					81.2	7.3	84.1	6.6		
30.0					79.7	6.8	82.5	6.2	84.3	5.8
32.0					78.1	6.3	81.0	5.8	82.6	5.5
34.0							79.4	5.4	80.9	5.1
36.0									79.1	4.8
危険角度 (°)	76		77.5		77.5		78		78	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SJ性能 55mブーム + 2m + 30mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
9.0	84.8	8.0								
10.0	84.3	8.0								
11.0	83.8	8.0								
12.0	83.3	8.0								
14.0	82.3	8.0								
16.0	81.3	8.0								
18.0	80.2	8.0								
20.0	79.2	8.0	84.2	8.0						
22.0	78.2	8.0	83.1	8.0						
24.0	77.1	8.0	82.0	8.0						
26.0			80.9	8.0						
28.0			79.6	7.7	83.7	6.7				
30.0			78.2	6.6	82.3	6.2				
32.0					80.9	5.8	84.3	5.2		
34.0					79.5	5.3	82.8	4.9		
36.0							81.3	4.6	83.5	4.3
38.0							79.8	4.3	81.8	4.1
40.0									80.1	3.8
危険角度 (°)	76		77.5		78		78.5		78.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	

SJ性能 55mブーム + 2m + 35mSLジブ

オフセット	0°		15°		30°		45°		60°	
作業半径 (m)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)	ブーム角度 (°)	荷重 (ton)
10.0	84.7	6.5								
11.0	84.2	6.5								
12.0	83.7	6.5								
14.0	82.8	6.5								
16.0	81.9	6.5								
18.0	80.9	6.5								
20.0	80.0	6.5								
22.0	79.0	6.5	83.9	4.7						
24.0	78.0	6.5	82.8	4.4						
26.0			81.7	4.2						
28.0			80.5	4.0						
30.0			79.3	3.8	83.9	2.7				
32.0					82.7	2.6				
34.0					81.5	2.5	84.9	1.9		
36.0					80.2	2.4	83.5	1.8		
38.0							82.1	1.8		
40.0							80.7	1.7	83.6	1.4
42.0									82.0	1.4
44.0									80.4	1.4
危険角度 (°)	77		78		79		79.5		79.5	
標準フック	12t		12t		12t		12t		12t	
フック質量 (t)	0.42		0.42		0.42		0.42		0.42	
巻掛本数	1		1		1		1		1	



10.85m — 35m

スーパーラフィングジブ【55mブーム時】

SK性能 55mブーム + 2m + 10.85mSLジブ

オフセット	5°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.7 18.0				
9.0	84.0 18.0				
10.0	83.4 18.0				
11.0	82.7 18.0	84.3 18.0			
12.0	82.0 18.0	83.7 18.0			
14.0	80.6 17.3	82.3 18.0	84.3 18.0		
16.0		80.5 14.1	82.6 16.9	84.1 15.8	84.8 13.8
18.0			80.5 12.2	82.3 14.2	83.2 13.8
危険角度 (°)	79	79	80	80.5	81.5
標準フック	24t	24t	24t	24t	24t
フック質量 (t)	0.88	0.88	0.88	0.88	0.88
巻掛本数	2	2	2	2	2

SK性能 55mブーム + 2m + 15mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
7.0	84.5 12.0				
8.0	83.8 12.0				
9.0	83.2 12.0				
10.0	82.6 12.0				
11.0	81.9 12.0				
12.0	81.3 12.0	84.4 12.0			
14.0	80.0 12.0	83.1 12.0			
16.0		81.8 12.0	84.4 12.0		
18.0		80.5 12.0	83.0 12.0		
20.0			81.6 11.7	83.5 11.6	84.7 10.2
22.0				81.8 10.6	83.0 10.2
危険角度 (°)	79	79	80	80.5	81.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SK性能 55mブーム + 2m + 20mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
8.0	84.5 11.0				
9.0	84.0 11.0				
10.0	83.4 11.0				
11.0	82.8 11.0				
12.0	82.2 11.0				
14.0	81.1 11.0	84.7 11.0			
16.0	79.9 11.0	83.5 11.0			
18.0		82.3 11.0			
20.0		80.9 10.7	84.5 11.0		
22.0			83.0 10.3		
24.0			81.2 8.4	83.9 8.6	
26.0				82.3 8.0	83.9 7.5
28.0					82.2 7.1
危険角度 (°)	79	79.5	80	80.5	81.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SK性能 55mブーム + 2m + 25mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
9.0	84.4 9.0				
10.0	83.9 9.0				
11.0	83.3 9.0				
12.0	82.7 9.0				
14.0	81.6 9.0				
16.0	80.5 9.0	84.9 9.0			
18.0		83.8 9.0			
20.0		82.6 9.0			
22.0		81.4 9.0			
24.0			84.1 8.5		
26.0			82.6 7.9		
28.0			80.9 6.2	84.1 6.6	
30.0				82.5 6.2	84.3 5.8
32.0					82.6 5.5
危険角度 (°)	79.5	80	80	81	81.5
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SK性能 55mブーム + 2m + 30mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
9.0	84.8 8.0				
10.0	84.3 8.0				
11.0	83.8 8.0				
12.0	83.3 8.0				
14.0	82.3 8.0				
16.0	81.3 8.0				
18.0					
20.0		84.2 8.0			
22.0		83.1 8.0			
24.0					
26.0					
28.0			83.7 6.7		
30.0					
32.0				84.3 5.2	
34.0				82.4 3.7	
36.0					83.5 4.3
危険角度 (°)	80.5	82	82	82	82
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1

SK性能 55mブーム + 2m + 35mSLジブ

オフセット	0°	15°	30°	45°	60°
作業半径 (m)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)	ブーム角度 (°): 荷重 (ton)
10.0	84.7 6.5				
11.0	84.2 6.5				
12.0	83.7 6.5				
14.0	82.8 6.5				
16.0	81.9 6.5				
18.0	80.9 6.5				
20.0					
22.0		83.9 4.7			
24.0		82.8 4.4			
26.0					
28.0					
30.0			83.9 2.7		
32.0			82.7 2.6		
34.0				84.9 1.9	
36.0				83.5 1.8	
38.0					
40.0					83.6 1.4
危険角度 (°)	80.5	82	82	82	82
標準フック	12t	12t	12t	12t	12t
フック質量 (t)	0.42	0.42	0.42	0.42	0.42
巻掛本数	1	1	1	1	1